
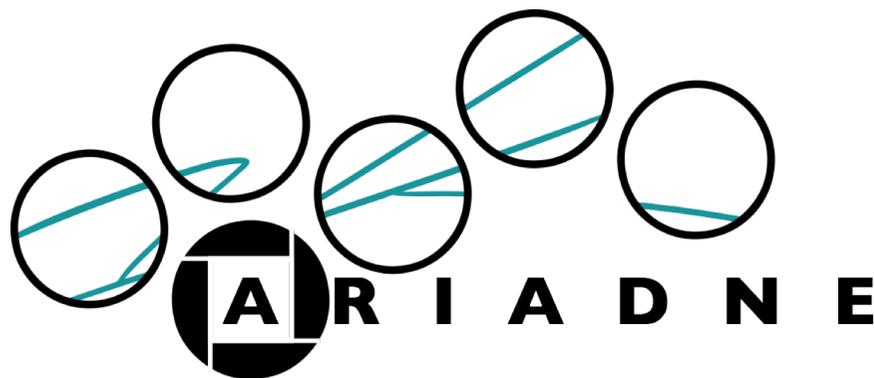


ARIADNE: bringing a game changing optical readout to two phase LAr TPCs

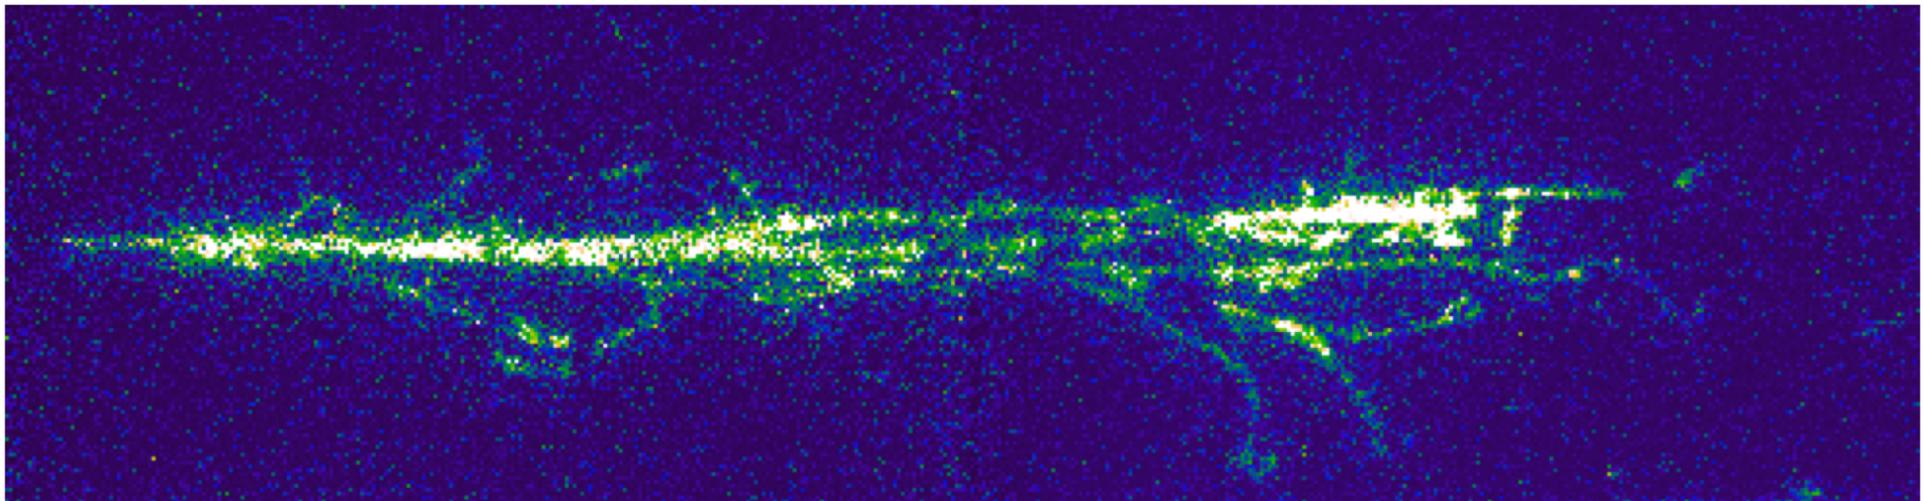

Kostas Mavrokoridis

k.mavrokoridis@liv.ac.uk

Birmingham HEP Seminar,
Jan 2020

<http://hep.ph.liv.ac.uk/ariadne>

- Neutrino Physics outlook and LAr properties
- The ARIADNE Detector
 - Construction at Liverpool
- Operation at CERN T9 beamline with EMCCDs & first results
- ARIADNE upgrade at Liverpool
 - TPX3 camera on ARIADNE
 - Exciting TPX3Cam results in gas CF_4 and LAr
- Future directions and a larger scale demonstration within the CERN neutrino platform

Very rich physics program:


- Neutrino oscillations (DUNE)
 - **CP Violation** discovery, measurement of δ_{CP}
 - Determination of **Mass Hierarchy**
 - Test **PMNS unitarity** (3-neutrino mixing paradigm)
- Neutrino **cross sections** (DUNE Near Detector, SBN program)
- Proton decay (DUNE Far Detector)
- Supernova & low energy neutrinos (Far Detector)
- BSM (ND, FD)
 - Light DM; Boosted DM; Steriles; non-standard neutrino interactions; CPT violation; neutrino tridents; Large Extra Dimensions; neutrinos from DM annihilation in the sun, ...

Why Liquid Argon?




- ✓ **Dense:** 40% denser than water
- ✓ **Easy ionization:** 55 000 e⁻/cm
- ✓ **High electron lifetime** if purified → long drifts
- ✓ **High light yield:** 40k γ/MeV
- ✓ **Abundant:** ~1% of the atmosphere
- ✓ **Cheap:** \$2/L (\$3000/L for Xe, \$500/L for Ne)

Two LAr Technology Options

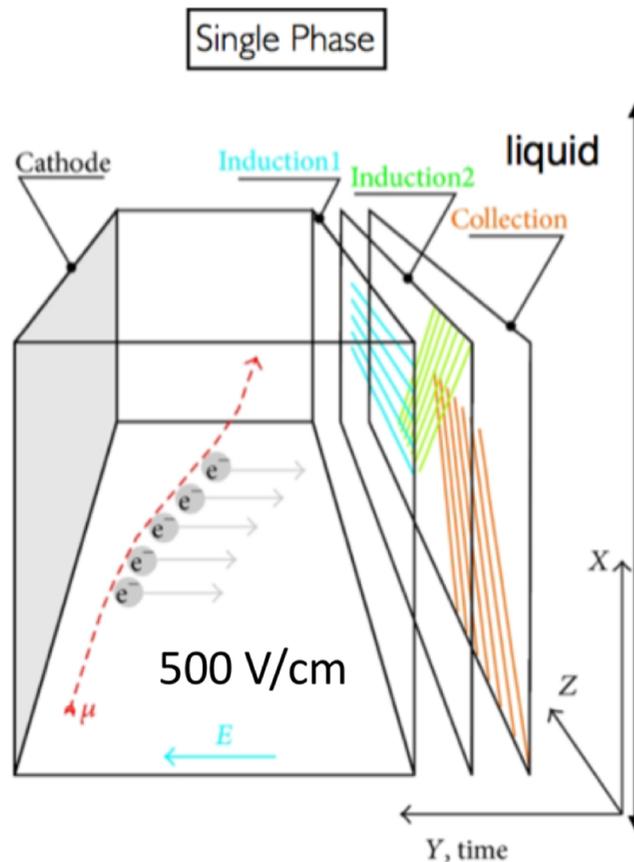


- Ionization charges drift horizontally and are read out with wires
- No signal amplification in liquid
- 3.6 m maximum drift
- Read out by APAs

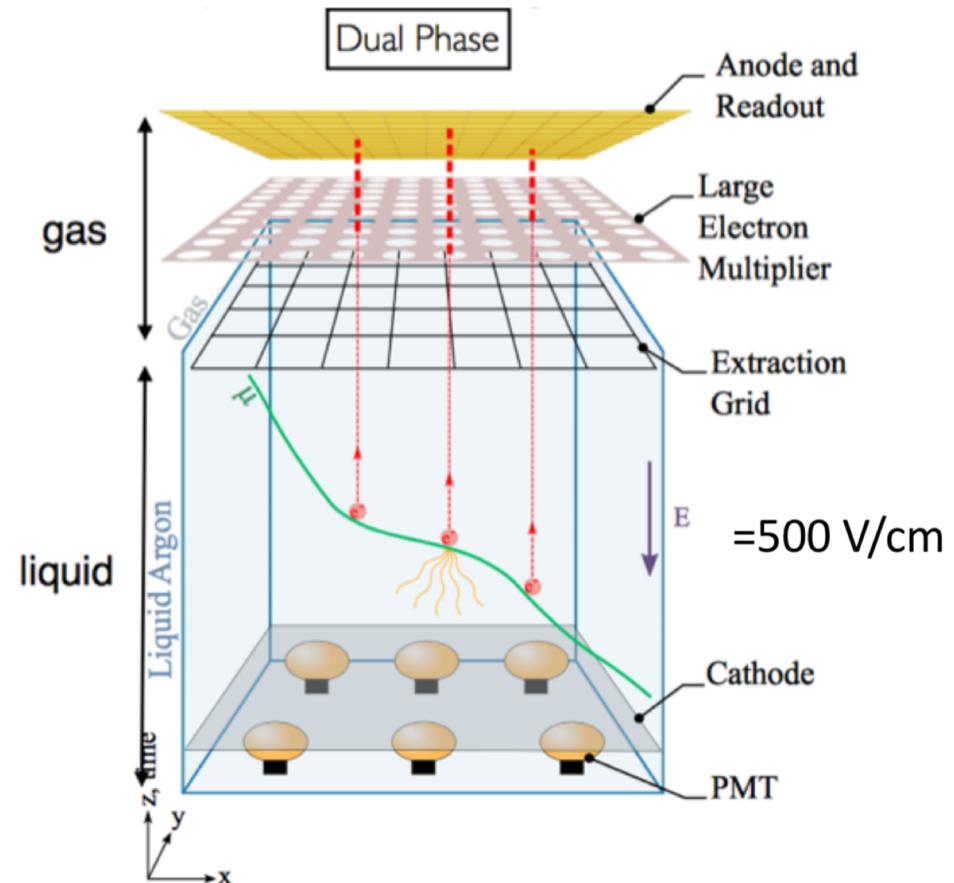

- Ionization charges drift vertically and are read out on PCB anode
- Amplification of signal in gas phase by LEM
- 12 m maximum drift
- Access through chimneys on top

ARIADNE

- ERC funded project started 2016
- Two phase detector
- 1500L Cryostat

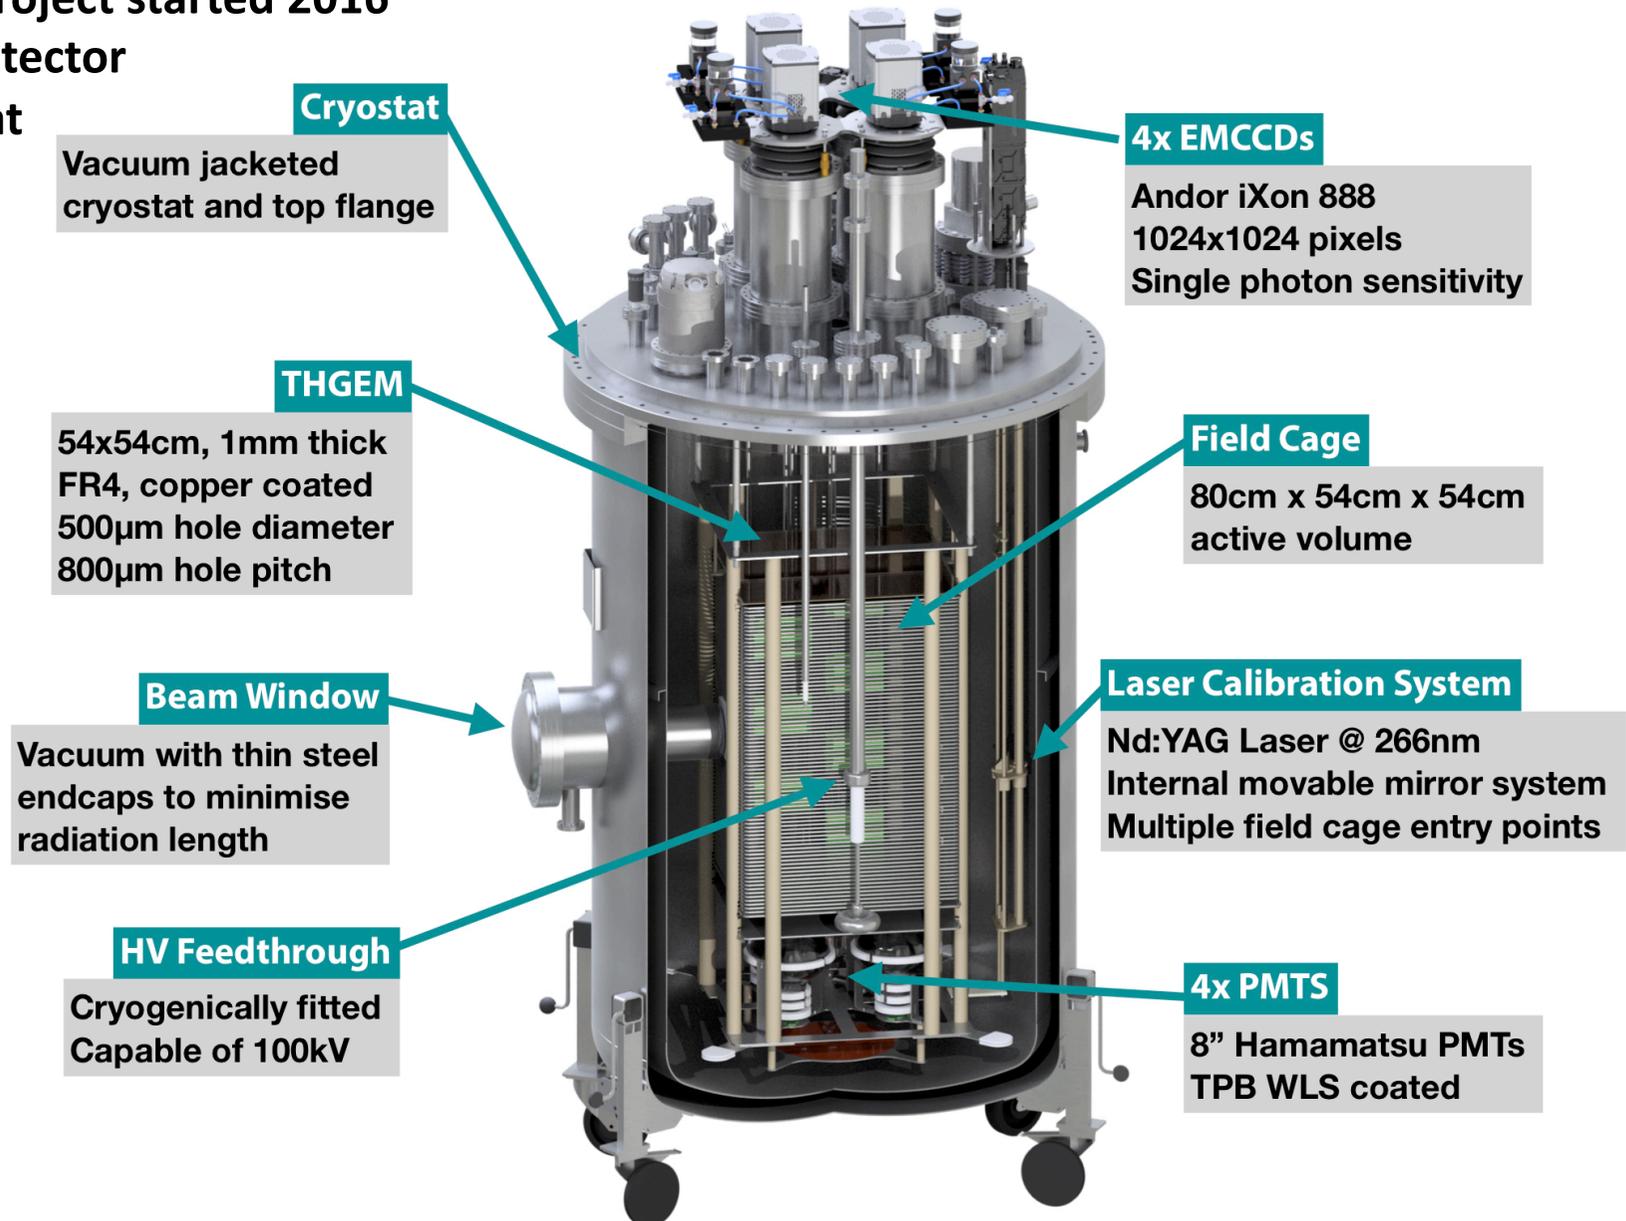


ARIADNE - developing optical readout, as an alternative to charge.

- **Two-phases**, Liquid and Gas Argon
- Particles interact with argon creating detectable scintillation light and ionization (charge)

Innovation of ARIADNE:


- **THGEM** in gas phase amplifies drifted charge by up to 100 times
- This creates secondary scintillation light (S2) that we photograph with high sensitivity cameras (EMCCDs or now TPX3)

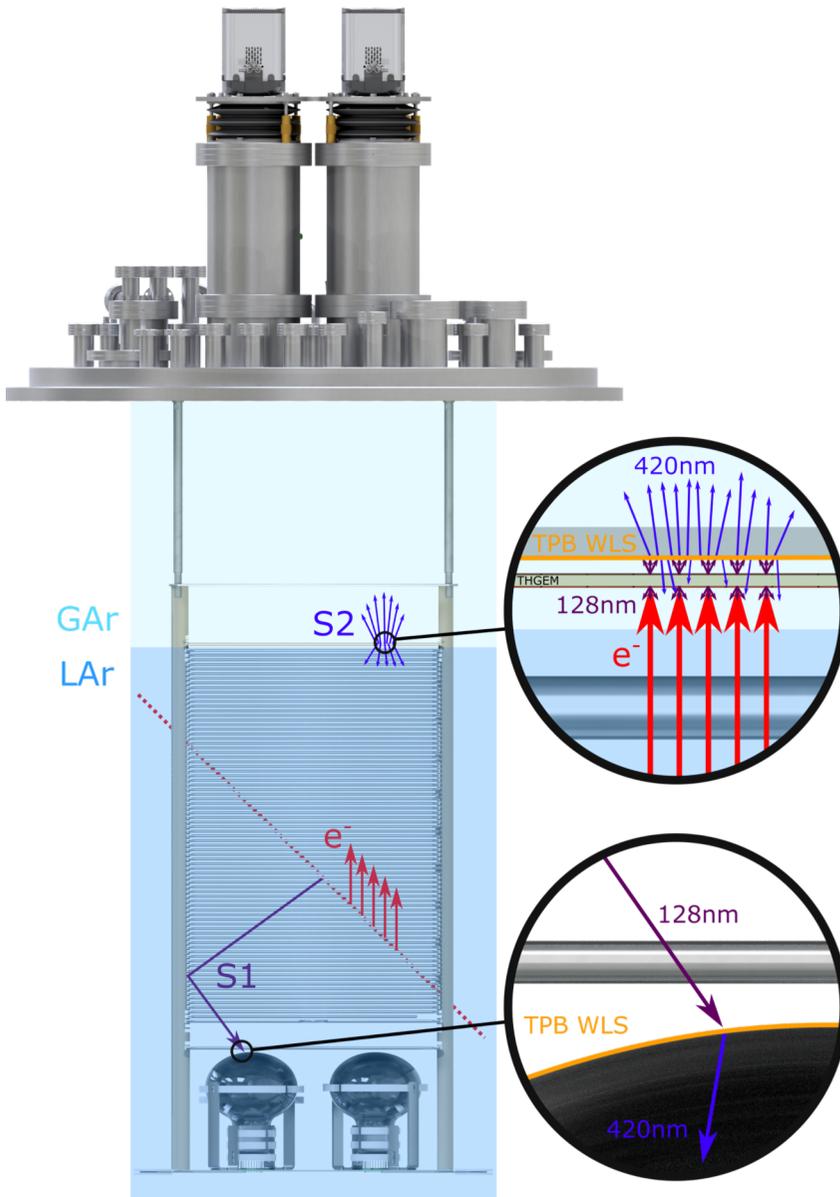


ARIADNE - developing optical readout, as an alternative to charge.

Benefits over previous charge readout techniques:

- **High resolution** — For e.g. an EMCCD sensor is 1024x1024 pixels (run with 4x4 binning \approx 1mm resolution).
- **Sensitivity to low energies** — gain is generated in the THGEM; cameras can be sensitive to single photons.
- **Very low noise** — Externally mounted cameras are decoupled from TPC electronic noise sources.
- **Ease of access** — Cameras can easily be replaced or upgraded - particularly useful during long-term cryogenic running.
- **Cost efficient** (No need for thousands charge channels used in previous charge readout technology)

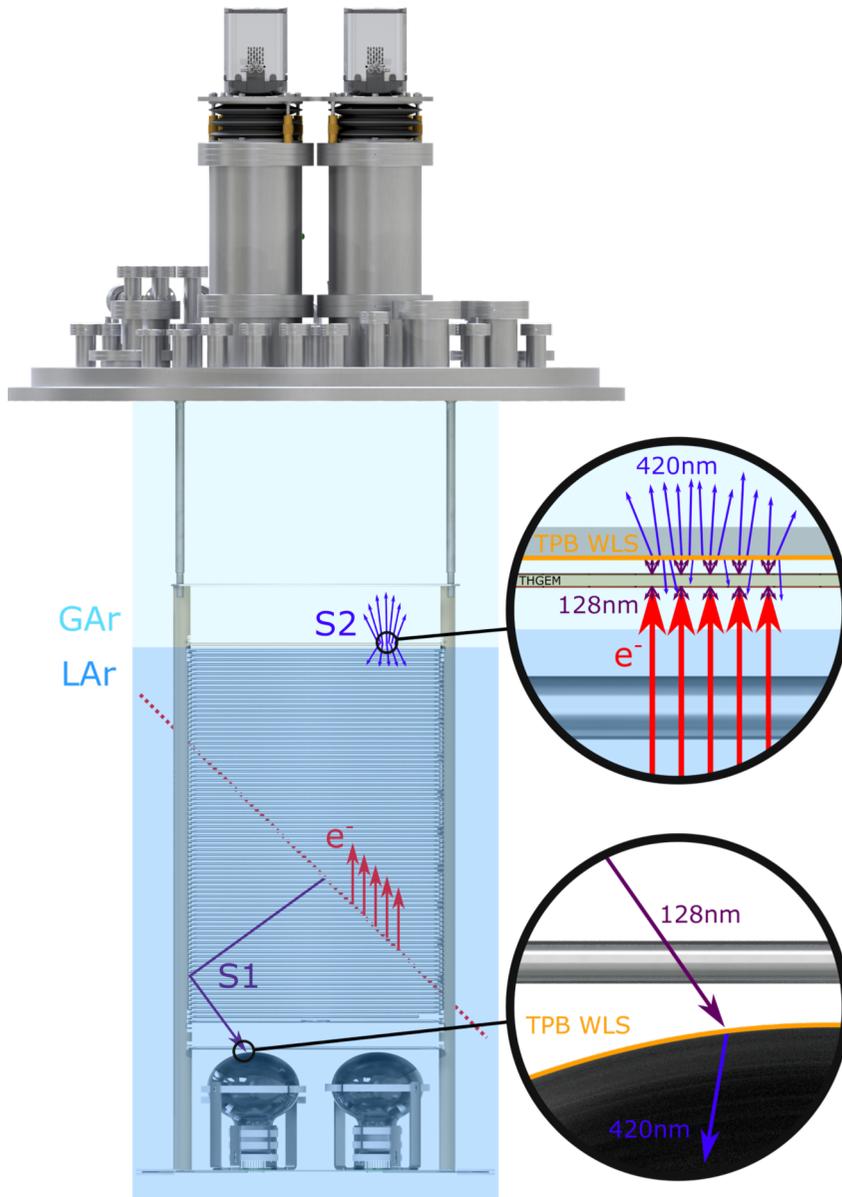

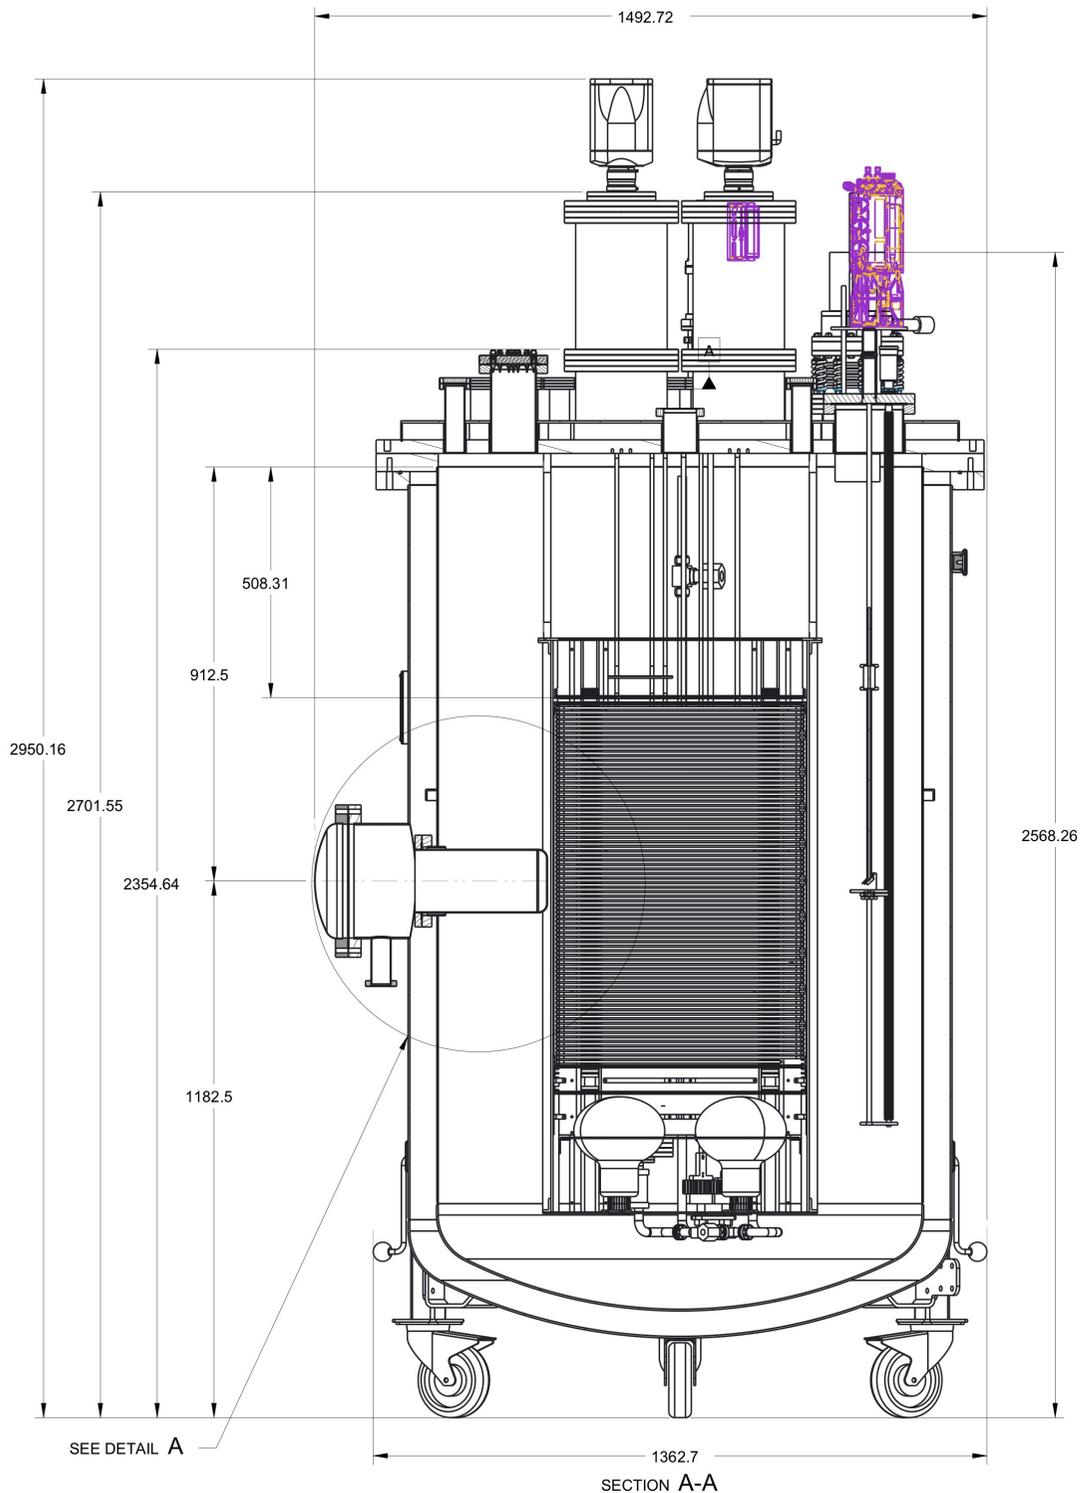

ARIADNE

Design & Construction

ARIADNE TDR:

<http://arxiv.org/abs/1910.03406>

ARIADNE TPC



UNIVERSITY OF
LIVERPOOL



**80 cm drift
(~500 μ s)**

10kV Feedthrough

100kV Feedthrough

Beam Plug

Field Shaping Rings


Heating Element

THGEM

80cm

Laser System


8" PMTS

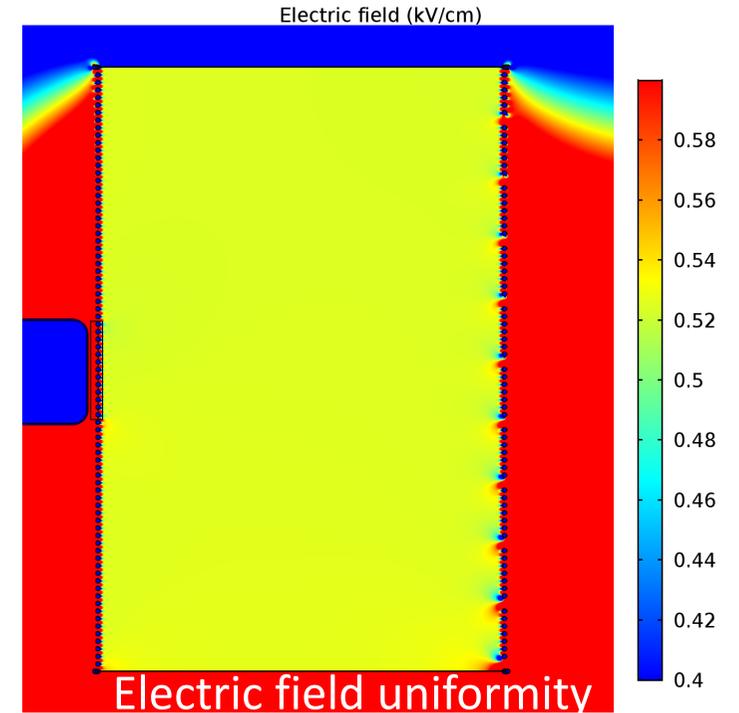


ARIADNE THGEM



UNIVERSITY OF
LIVERPOOL

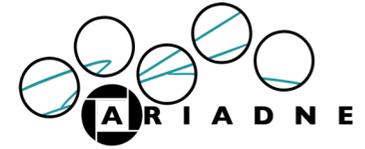

- 54cm x 54cm x 1mm FR4 board
- Copper coating on both faces
- 500 μ m hole diameter; 800 μ m hole pitch
- Very strong E-Fields - generally 25-36kV/cm




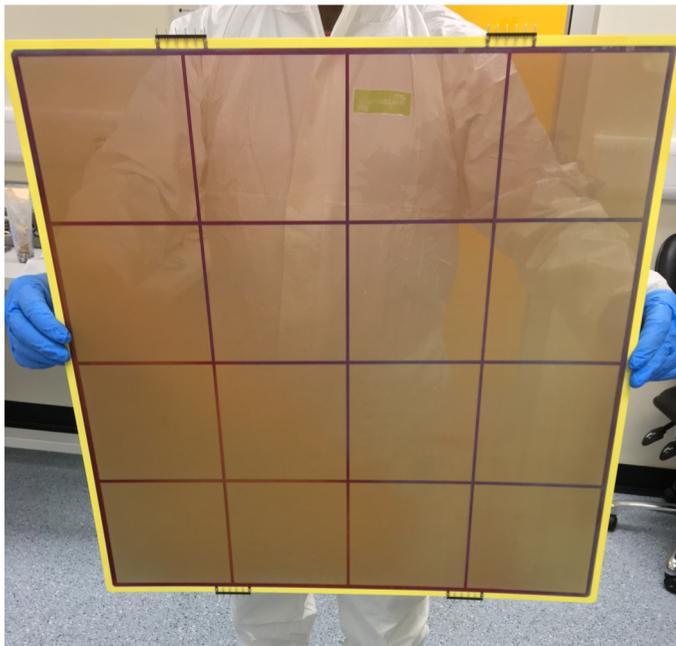


16 pad segmented (originally used)



Monolithic (current)

ARIADNE 100kV HV FT

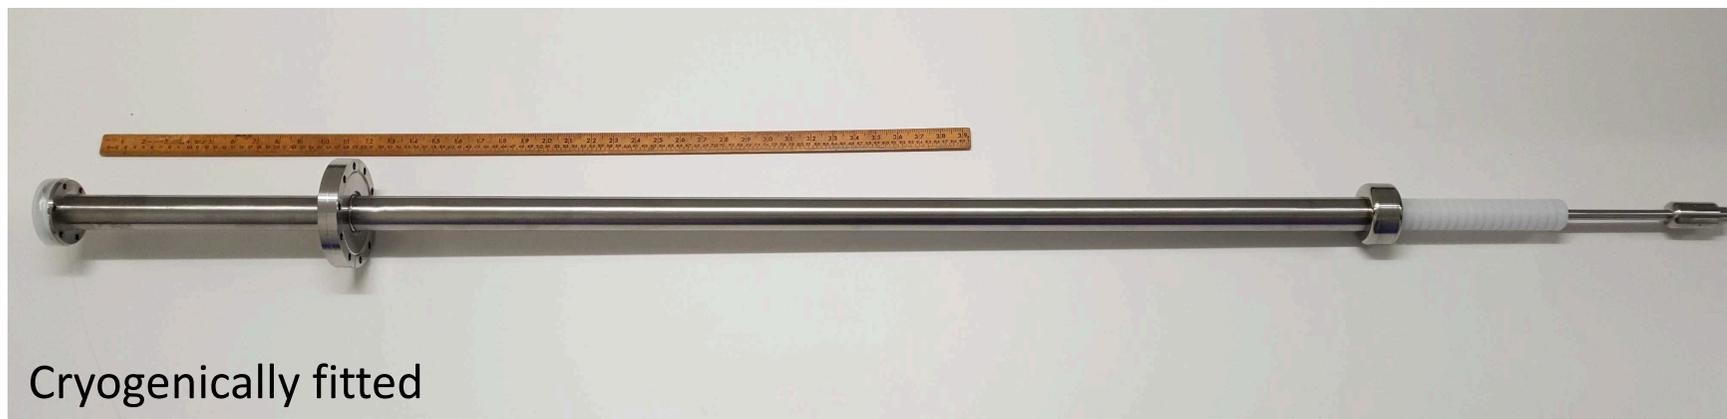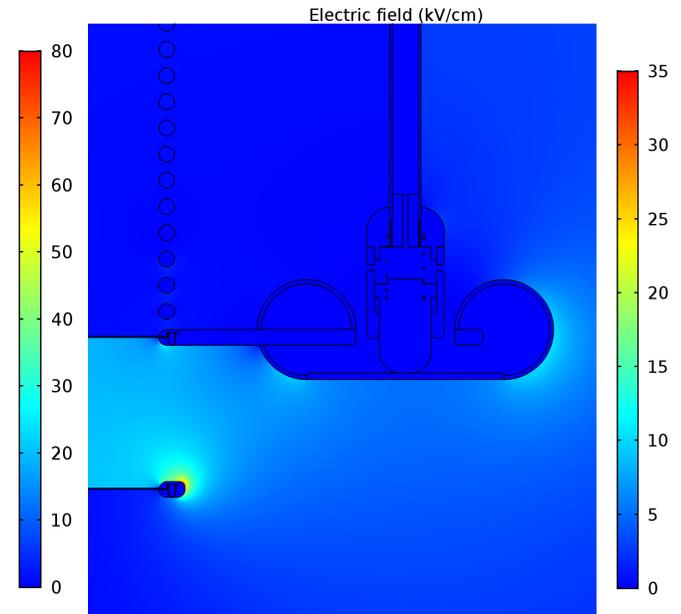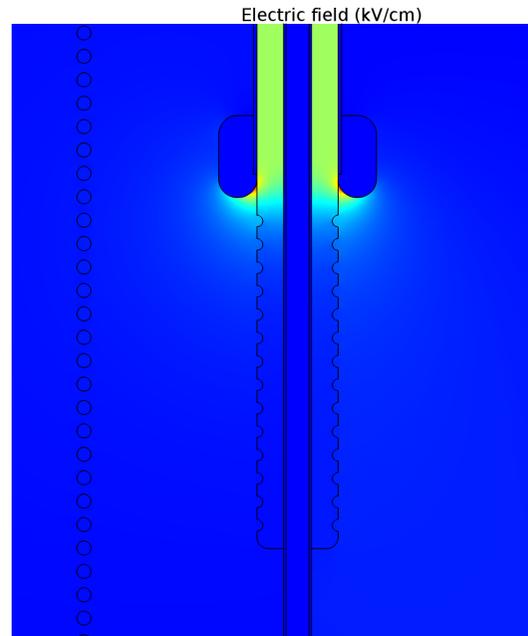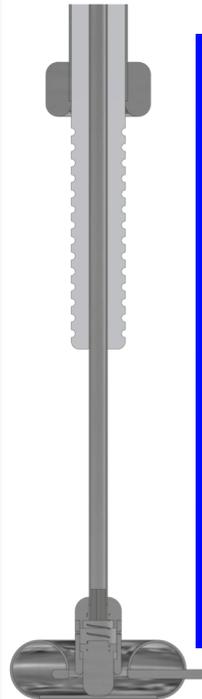


Cryogenically fitted

Ultrasonic LAr level sensors



UNIVERSITY OF
LIVERPOOL

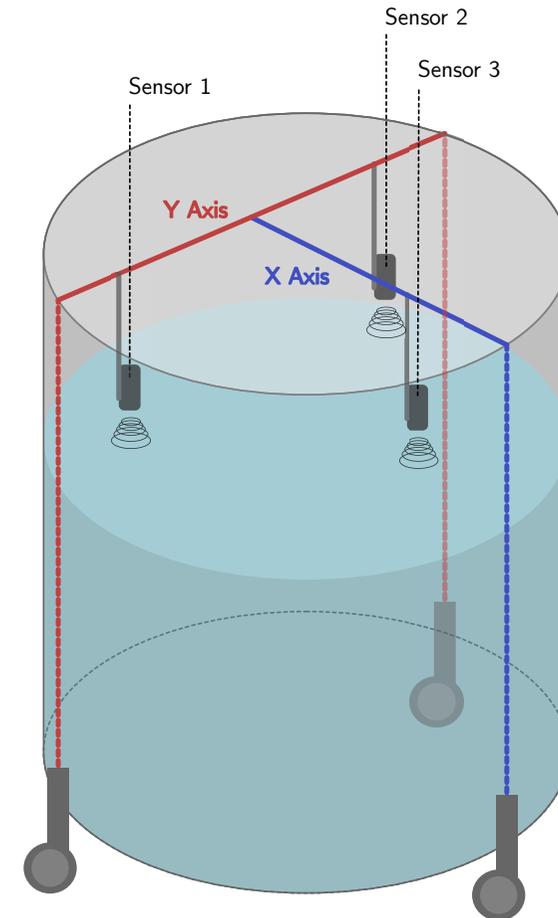


Baumer Ultrasonic Sensor Block,
Analogue, M12 Connector IP67, 500 μm accuracy


ARIADNE Top Flange




UNIVERSITY OF
LIVERPOOL

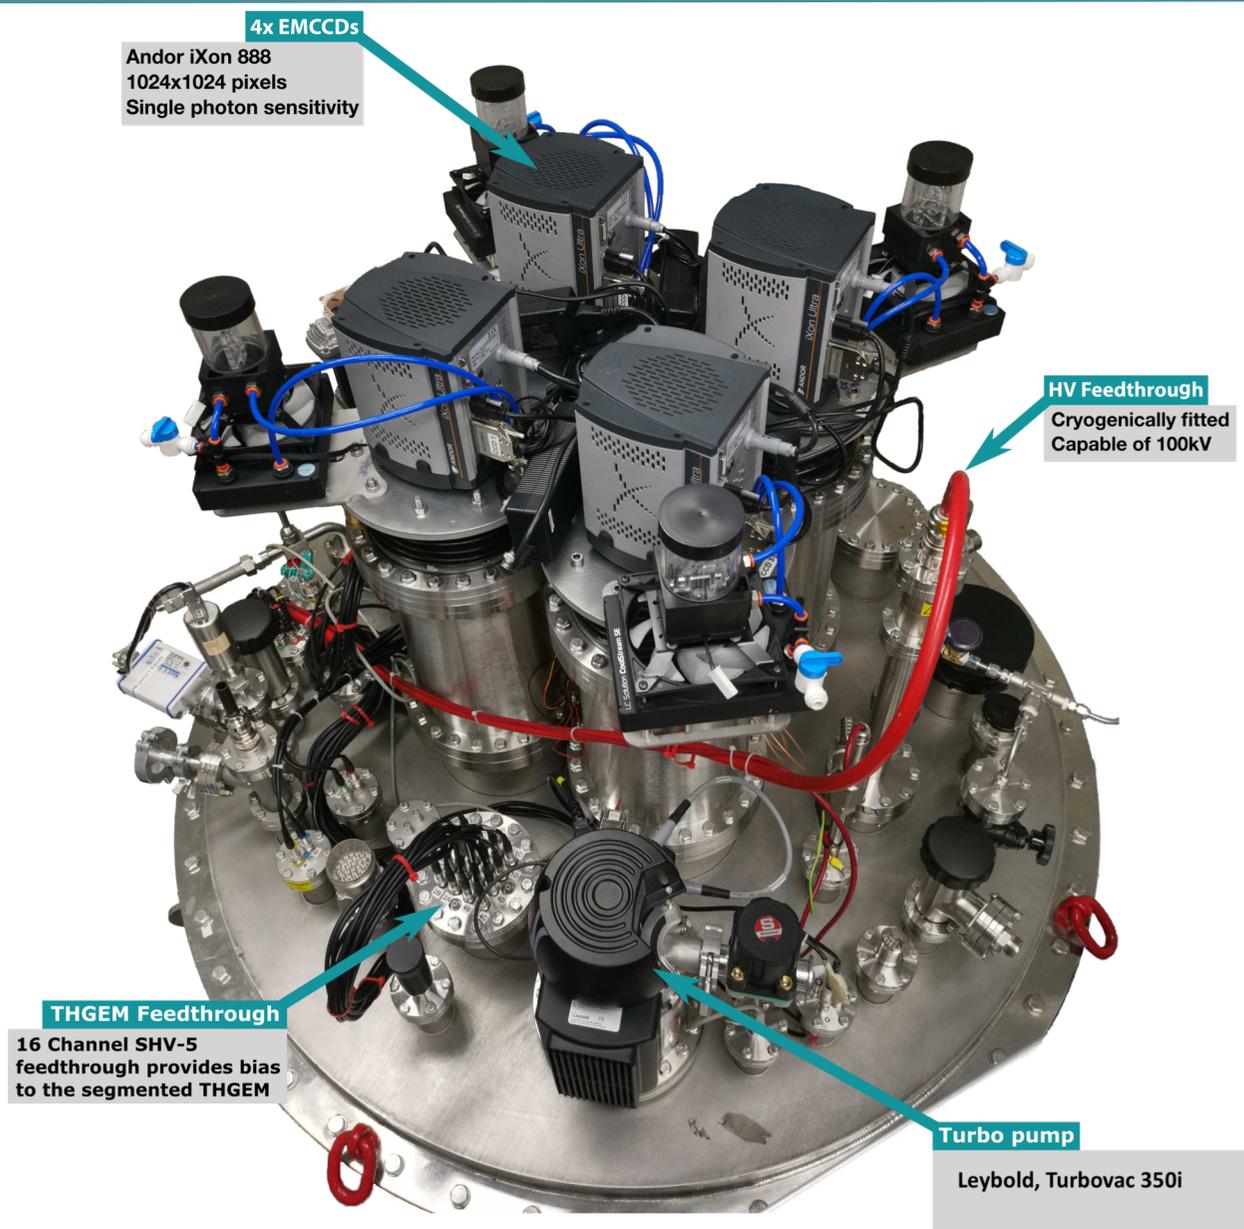

EMCCD Specs

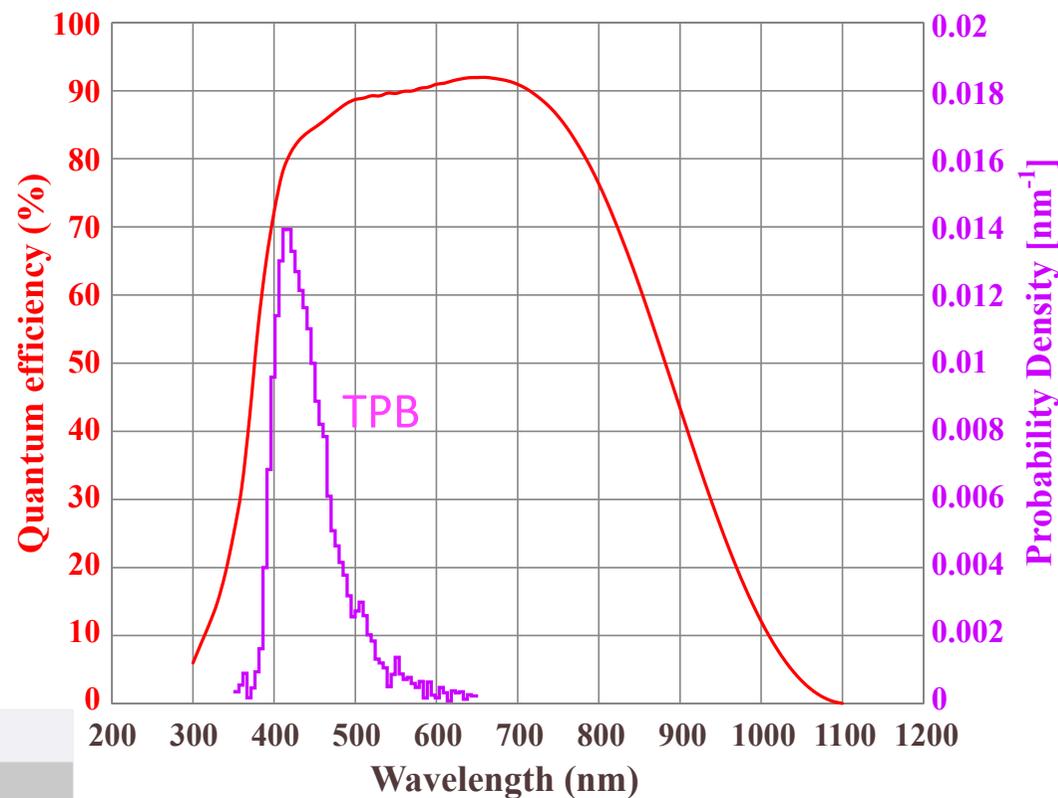


Models	iXon 888
Core attributes	Field of view, sensitivity and speed
Sensor format	1024 x 1024
Sensor diagonal	18.8 mm
QE Options	BV (Life) or BV, EX2, UVB (Ultra)
Pixel Size	13 μm
Frame Rate	26 fps (670 fps with 128 x 128 Crop Mode)
Read Noise	< 1 e ⁻ with EM Gain
Pixel well depth	80,000 e ⁻
Interface	USB 3.0

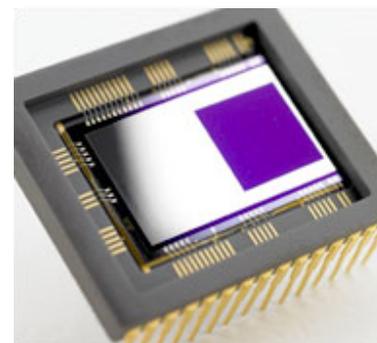

TPB Vacuum Evaporation



Vacuum evaporation chamber capable of coating 55cm x 55cm area

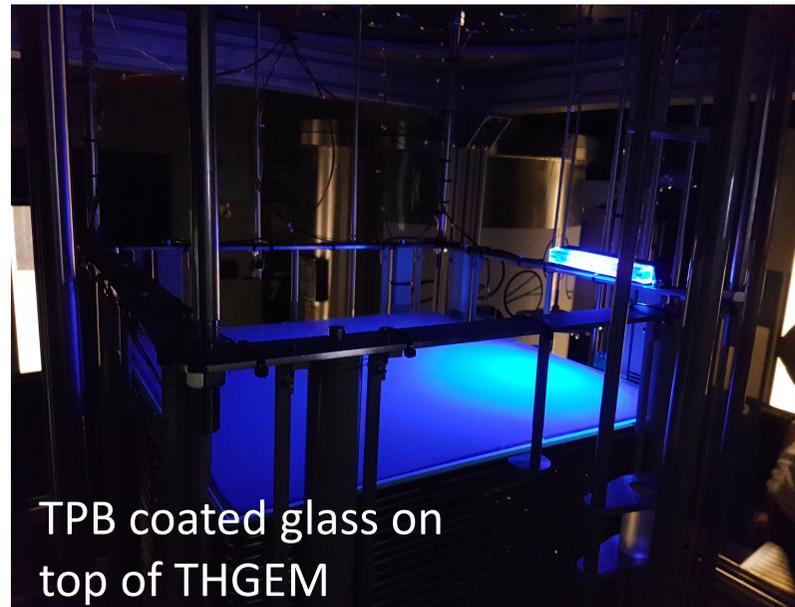

TPB coated glass on top of THGEM





PMTs



Reflectors

The VUV (128nm) light is shifted to 420nm using TPB

Beam window/plug

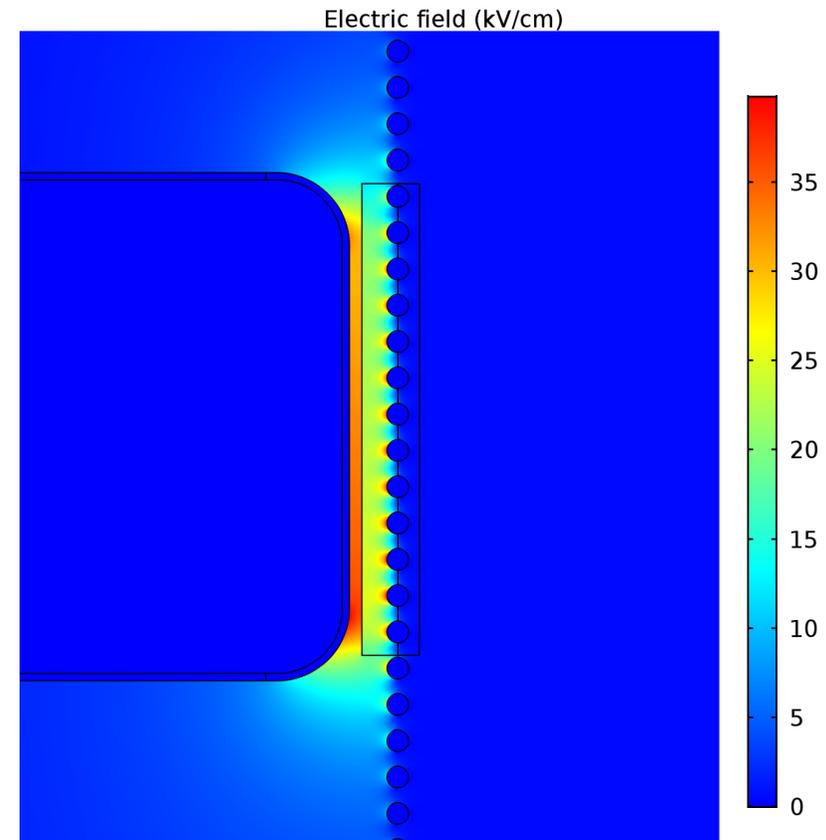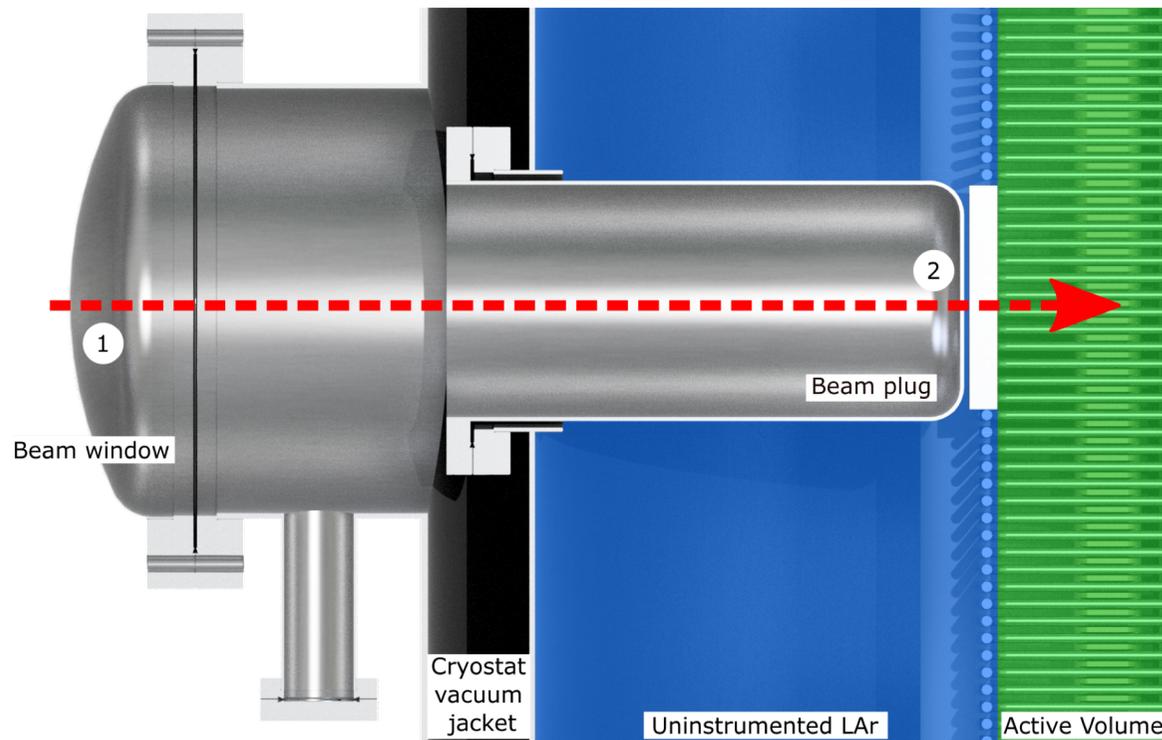

Beam transport through the ARIADNE beam window, plug and UHMWPE element.


- The total material budget for this design is **$0.22 X_0$**
- Unmodified cryostat would give $2.34 X_0$

COMSOL simulation of the electric field in the region near the end of the beam plug.

Argon Scintillation light

Interactions in liquid noble gases lead to the formation of excimers in either **singlet** or **triplet** states, which decay to the ground state with characteristic **fast** (6 ns) and **slow** (1.5 μ s) lifetimes in liquid argon with the photon emission spectrum peaked at **128 nm**.

The **slow component (tau2)** can be used as a relative measure of argon purity. The purest liquid argon has a decay time of 1500 ns (J. W. Keto *et al*, PRL, 1974).

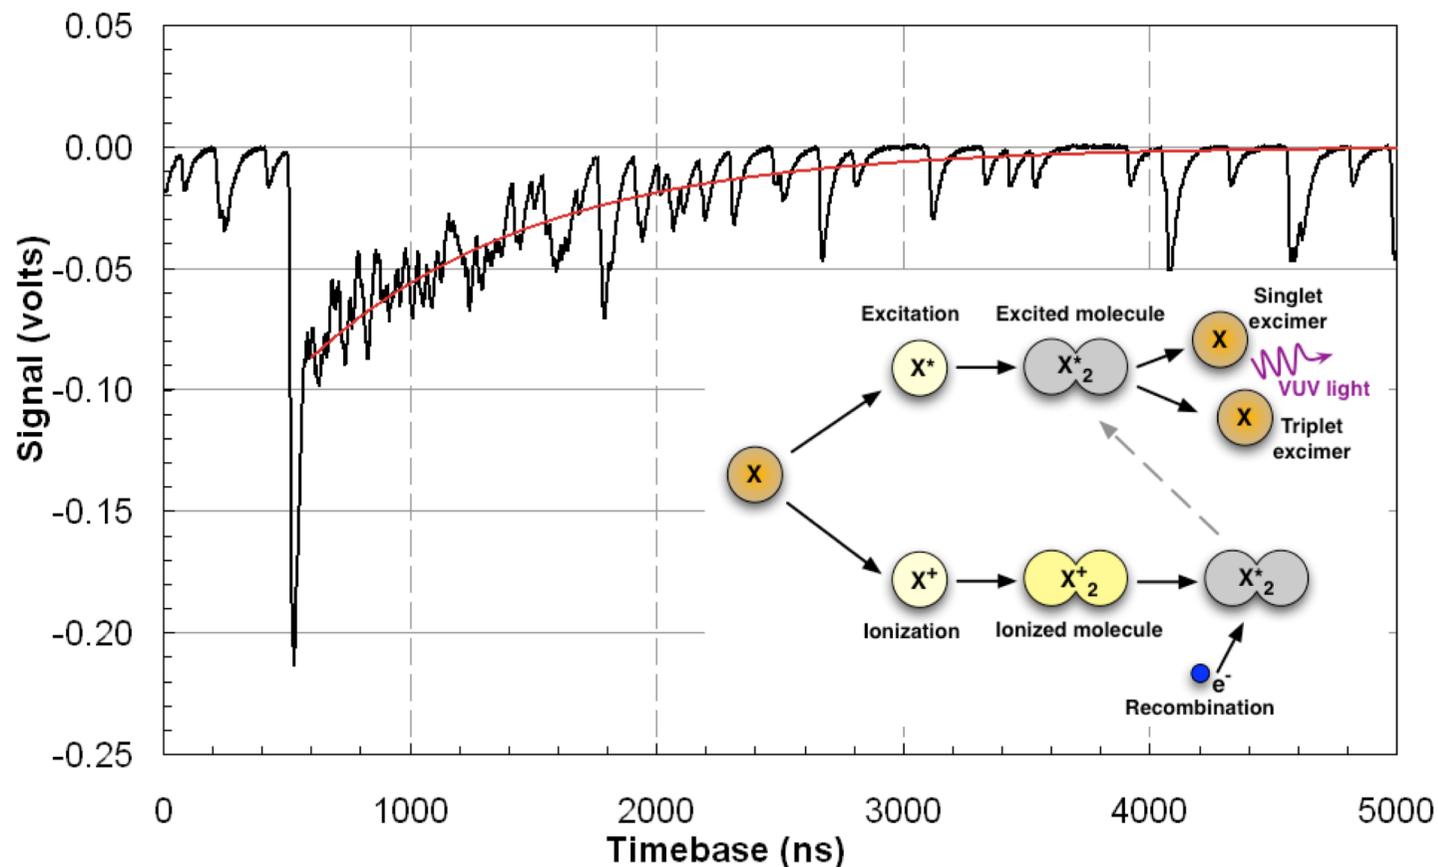

Argon Purification




- Better than 1ppb needed to drift the electrons in the TPC without capture from electronegative impurities
- Internal purification cartridge and custom made pump
- 4A Molecular sieves for water and Cu-0226 S for oxygen

Argon Purification




Purity

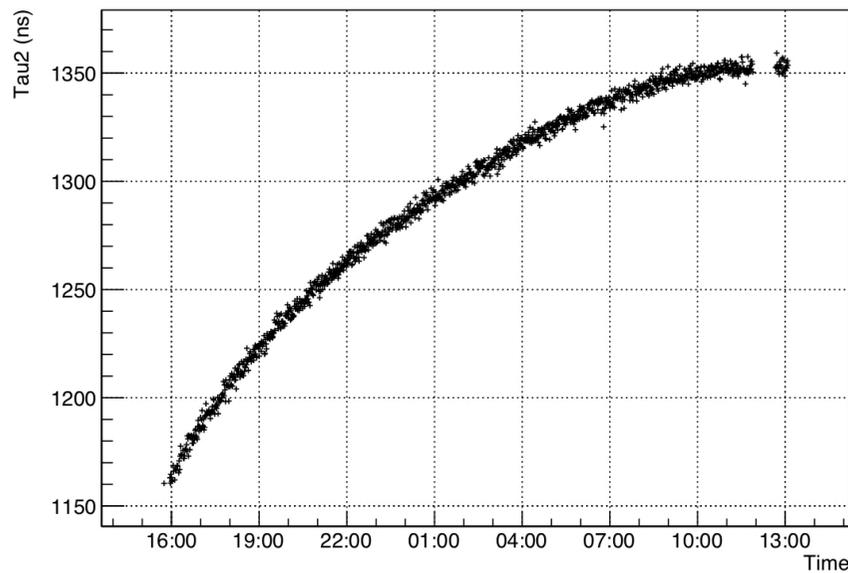

Sensitive to few ppb level, after that the electron lifetime needs to be calculated

Calibration Laser

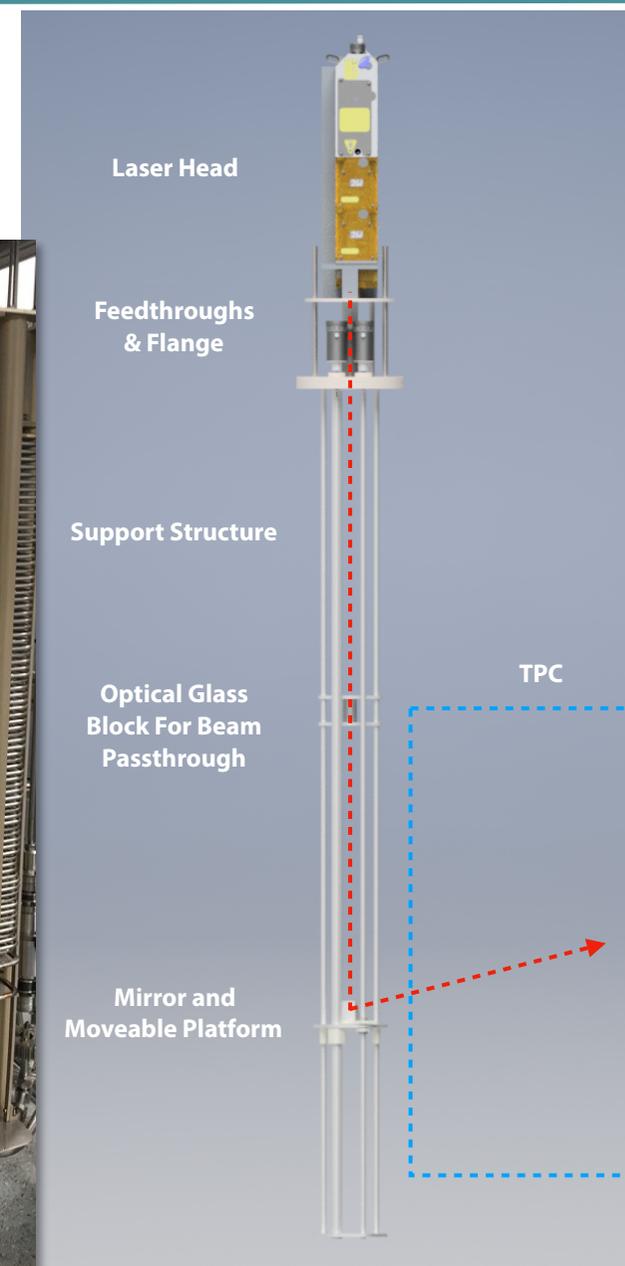


- Pulsed Nd:YAG Laser @266nm, max output 20 mJ
- Used for:
 - Detector calibration
 - Argon purity measurements
 - E-field uniformity measurements
 - Optical alignment of EMCCDs
- Mechanical system made from PEEK plastic

Construction at Liverpool





TPC

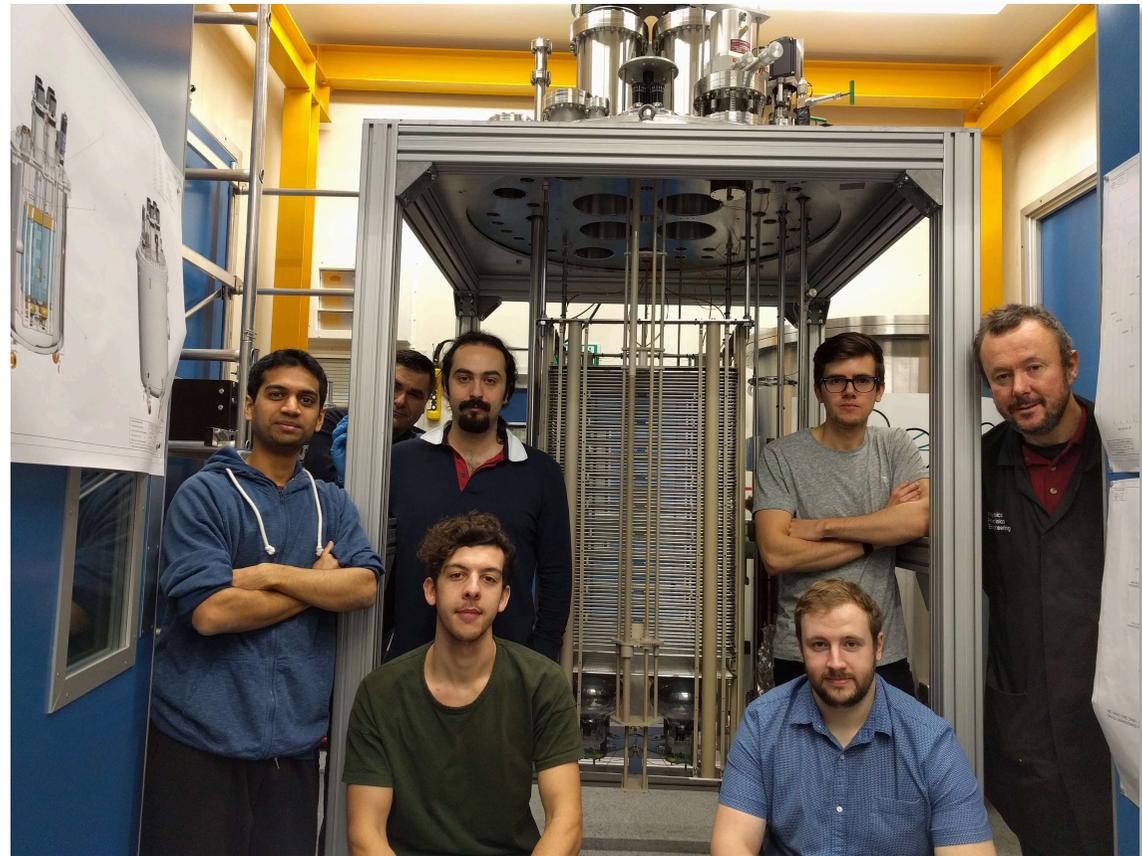

**First Detector assembly in the Liverpool
Liquid Argon facility, November 2017**

Construction at Liverpool

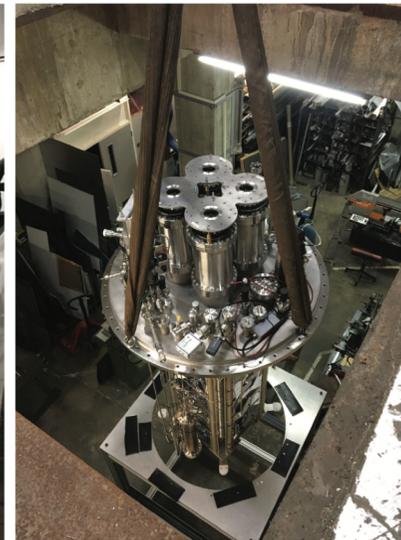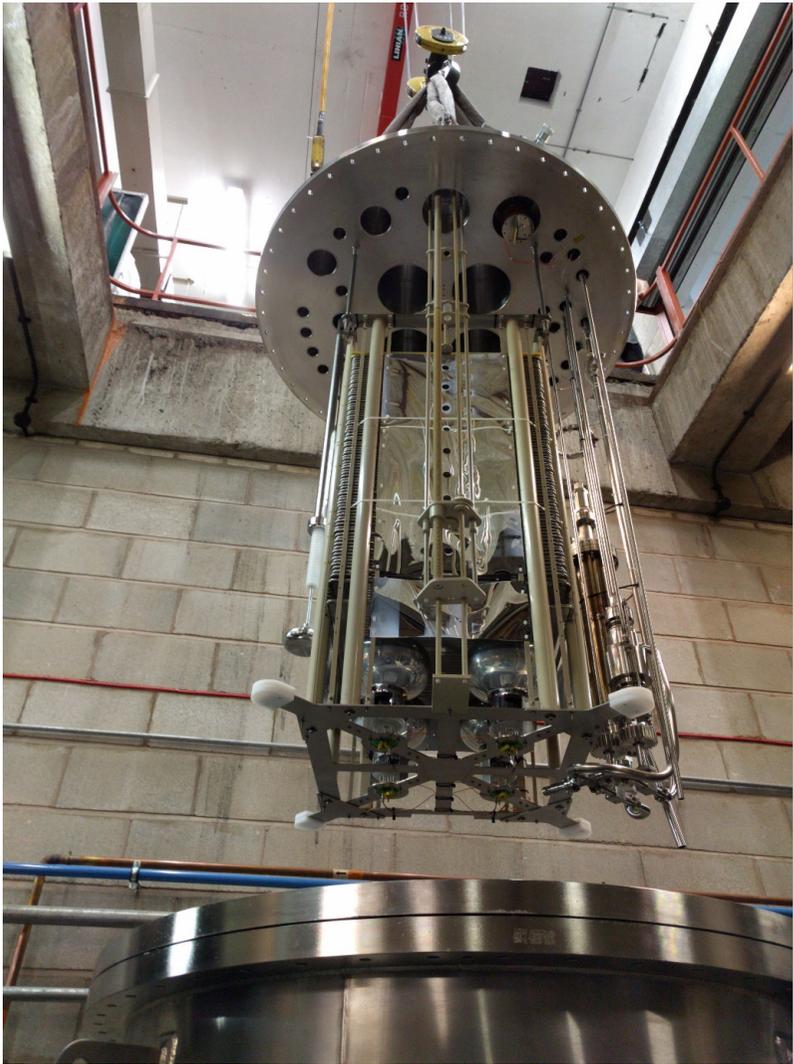


- Closing the Detector at Liverpool
- Ready for the first run end 2017

Operation at Liverpool



UNIVERSITY OF
LIVERPOOL

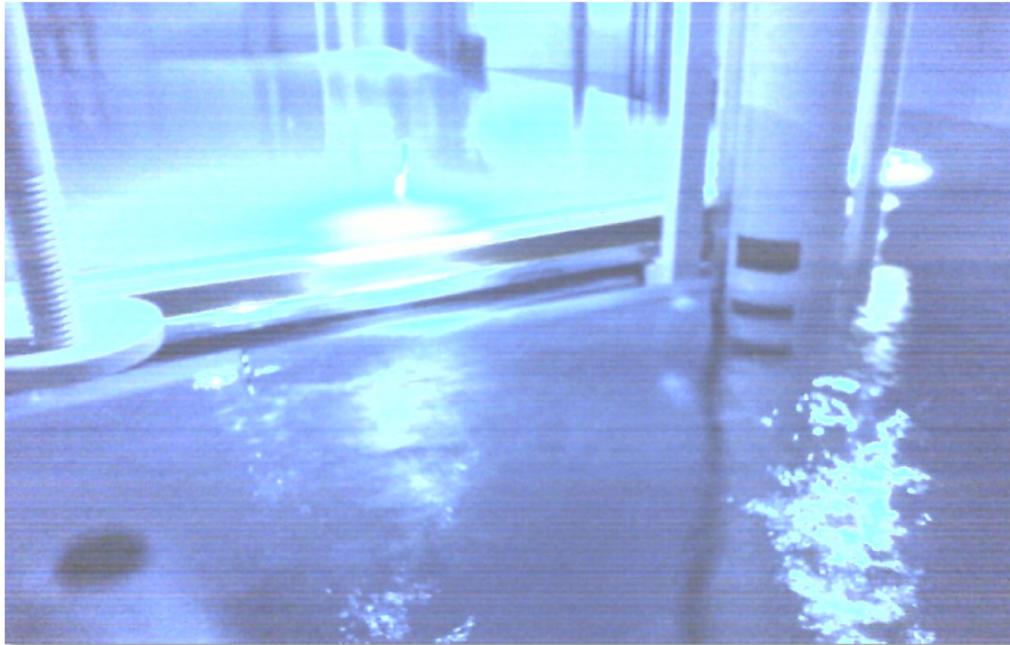

Cryogenic Monitoring Camera, viewing the THGEM at the liquid/gas interface

- ✓ Tested slow control / DAQ etc
- ✓ Ready to ship to CERN T9 beam early 2018






ARIADNE at T9 Beamline, CERN

ARIADNE at CERN



ARIADNE detector arrived from Liverpool to CERN March 8th 2018
Commissioning and data collection in March/April

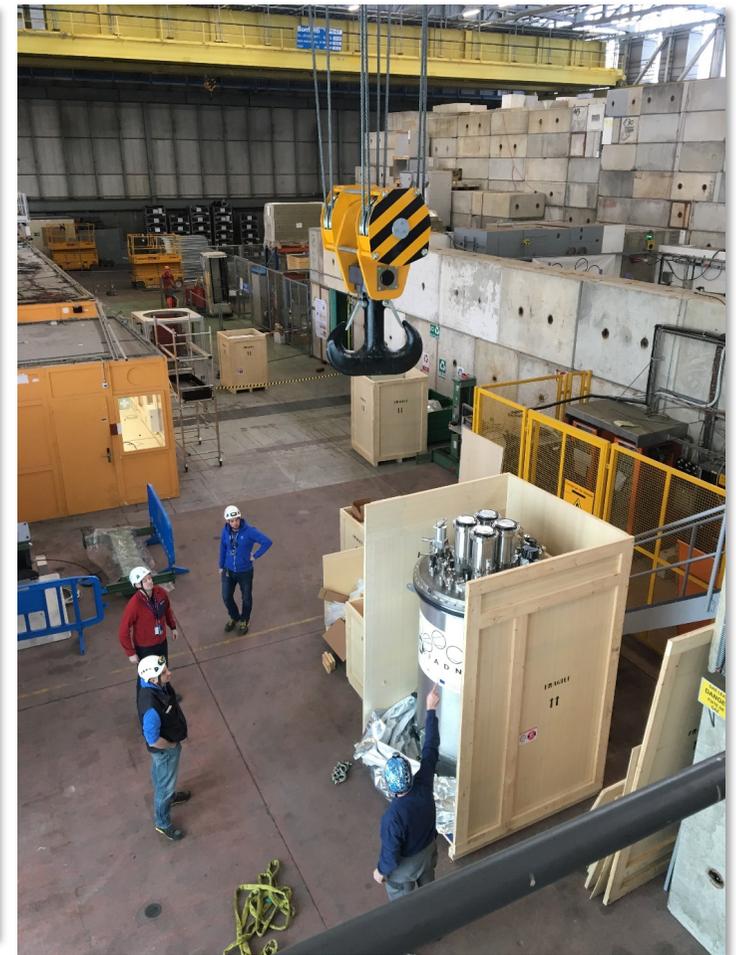

T9 Beam-line at CERN



The T9 Beamline

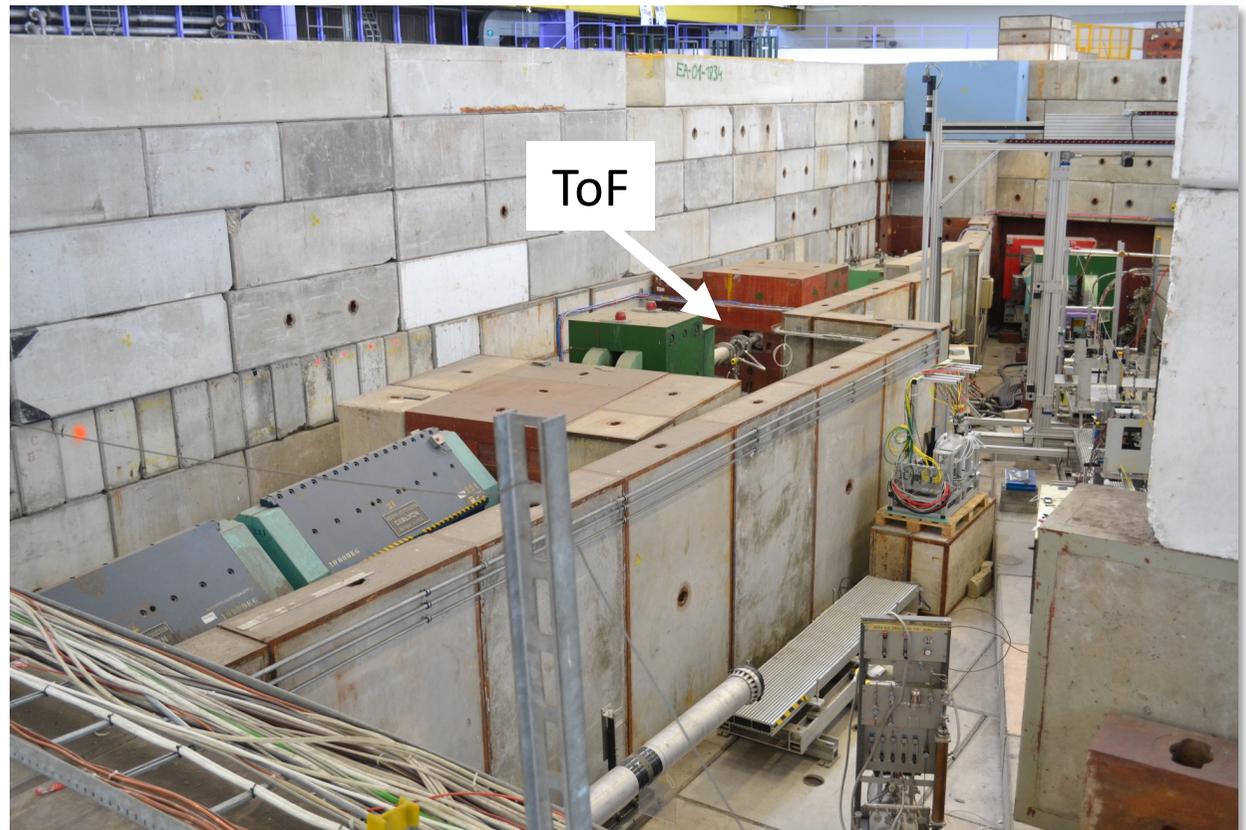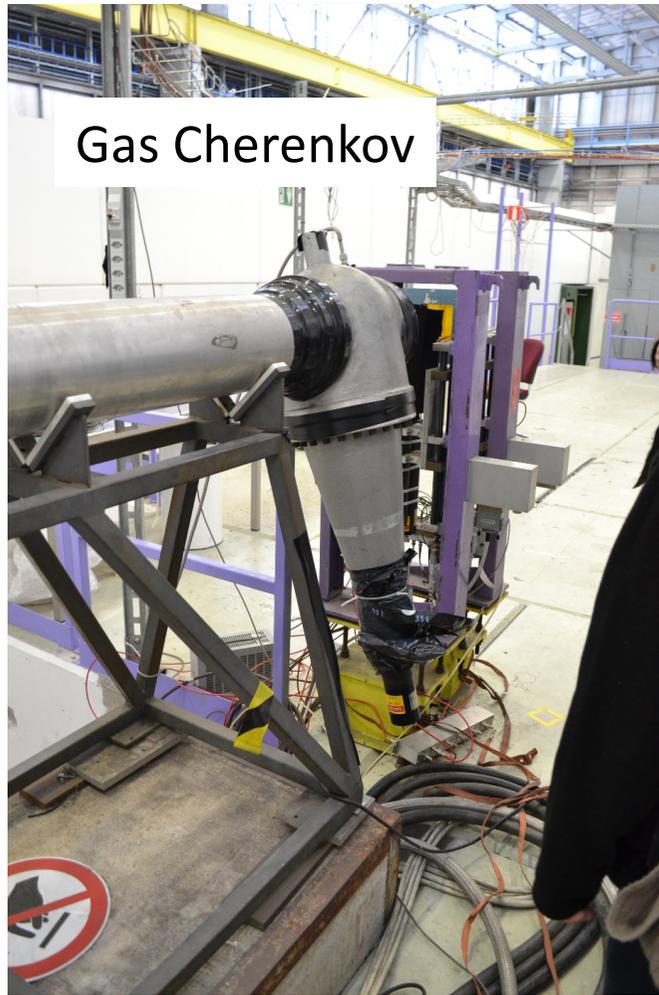

ARIADNE at CERN


Run March/April 2018


Data collected: **0.5 GeV – 8 GeV:**

Mix of e^\pm , μ^\pm , π^\pm , p^\pm

400,000 events Negative Polarity

400,000 events Positive Polarity

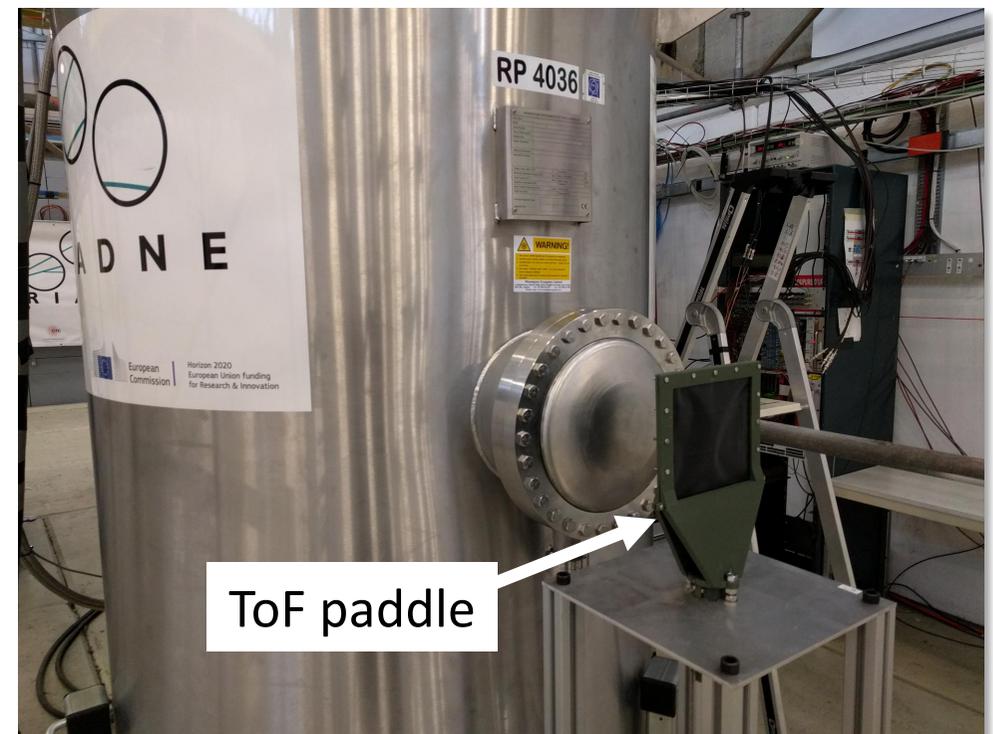


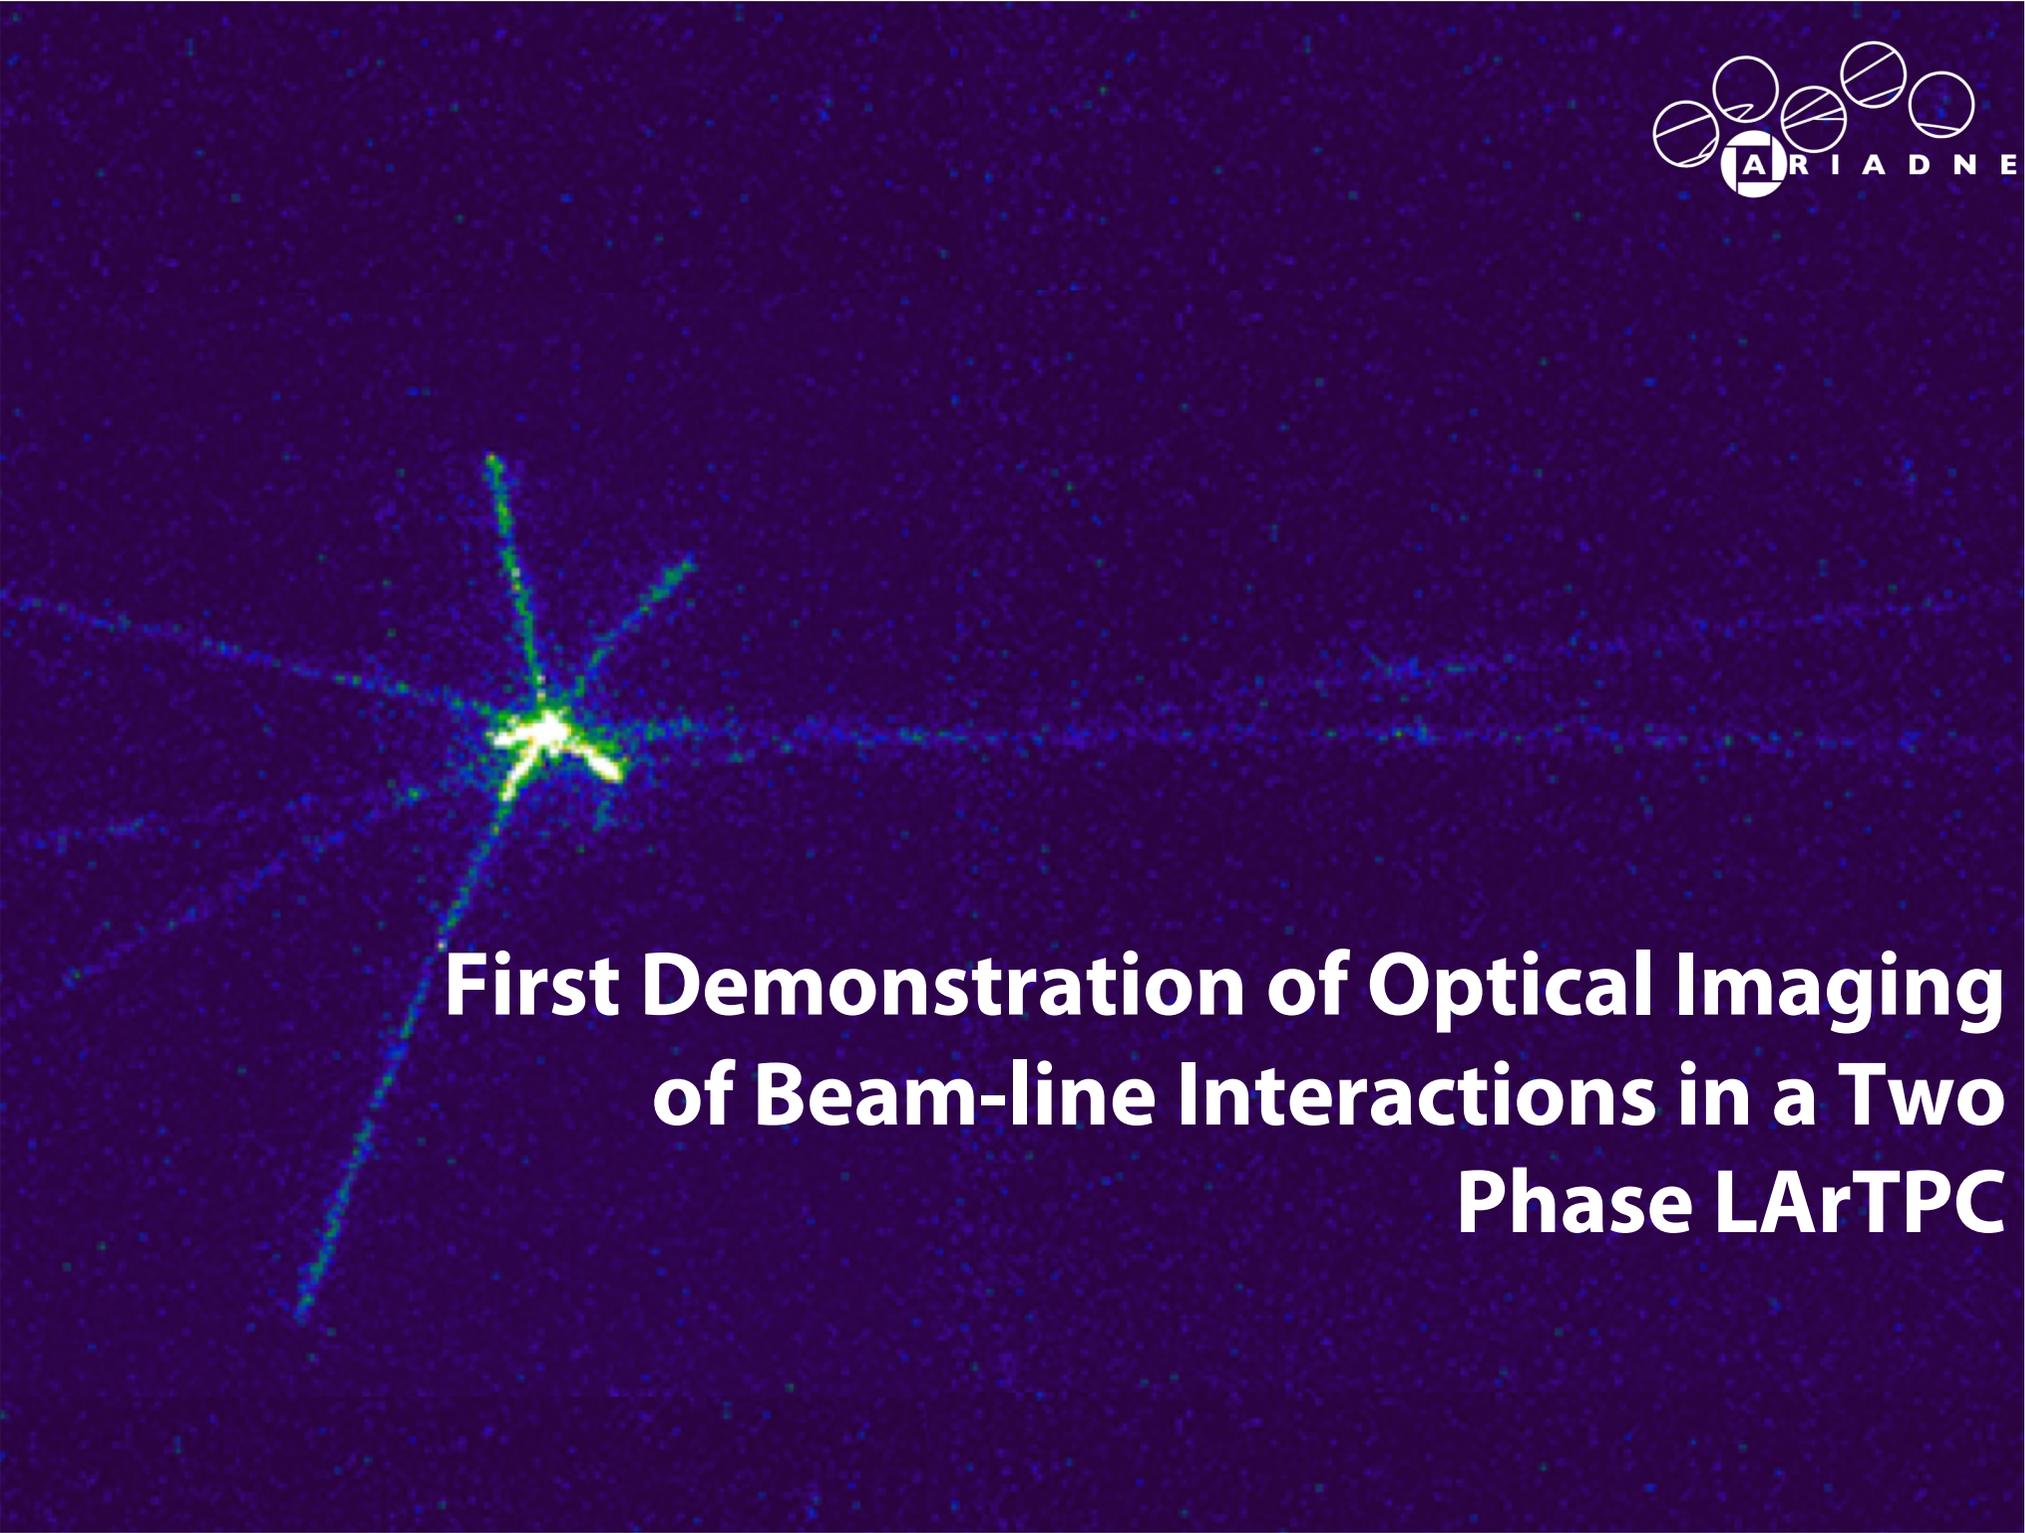


**First Demonstration of Optical Imaging
of Beam-line Interactions in a Two
Phase LArTPC**

Beamline Events

1.1mm / pixel resolution (4x4 bin)
(@Low THGEM gain 27 kV/cm)

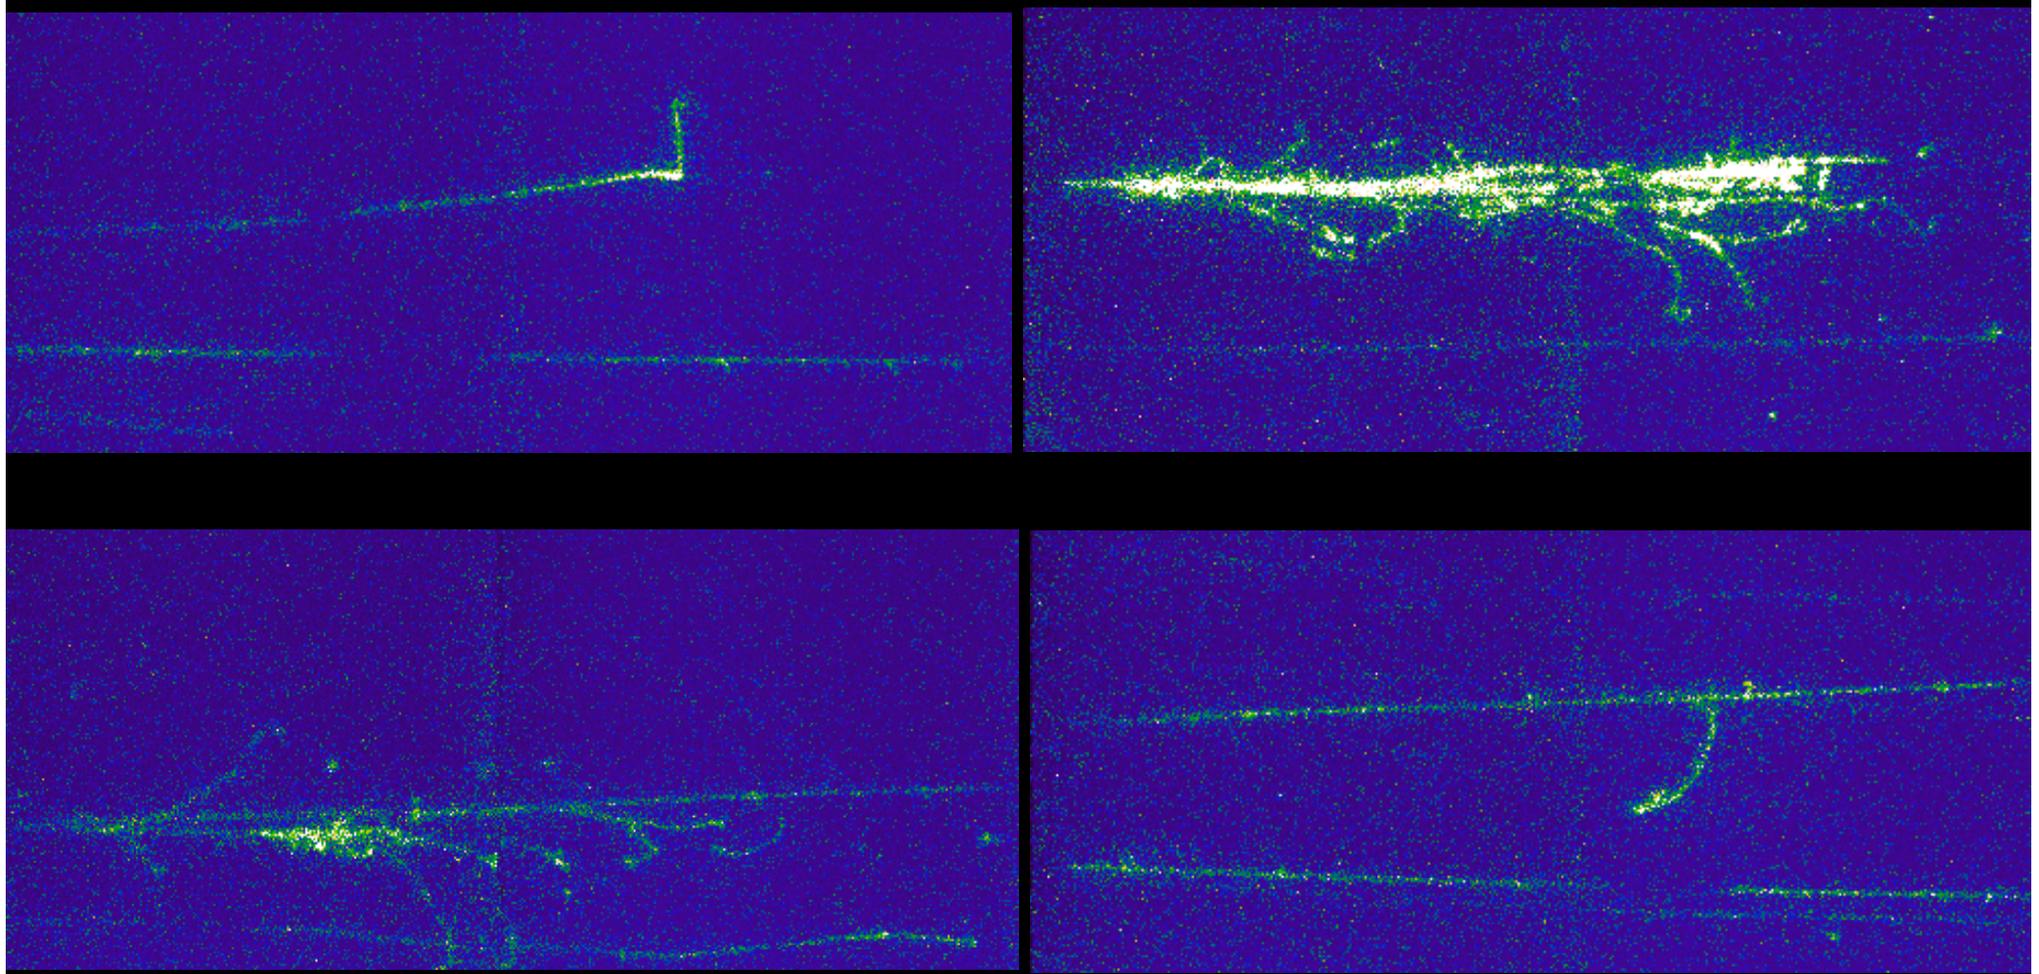


0.4m

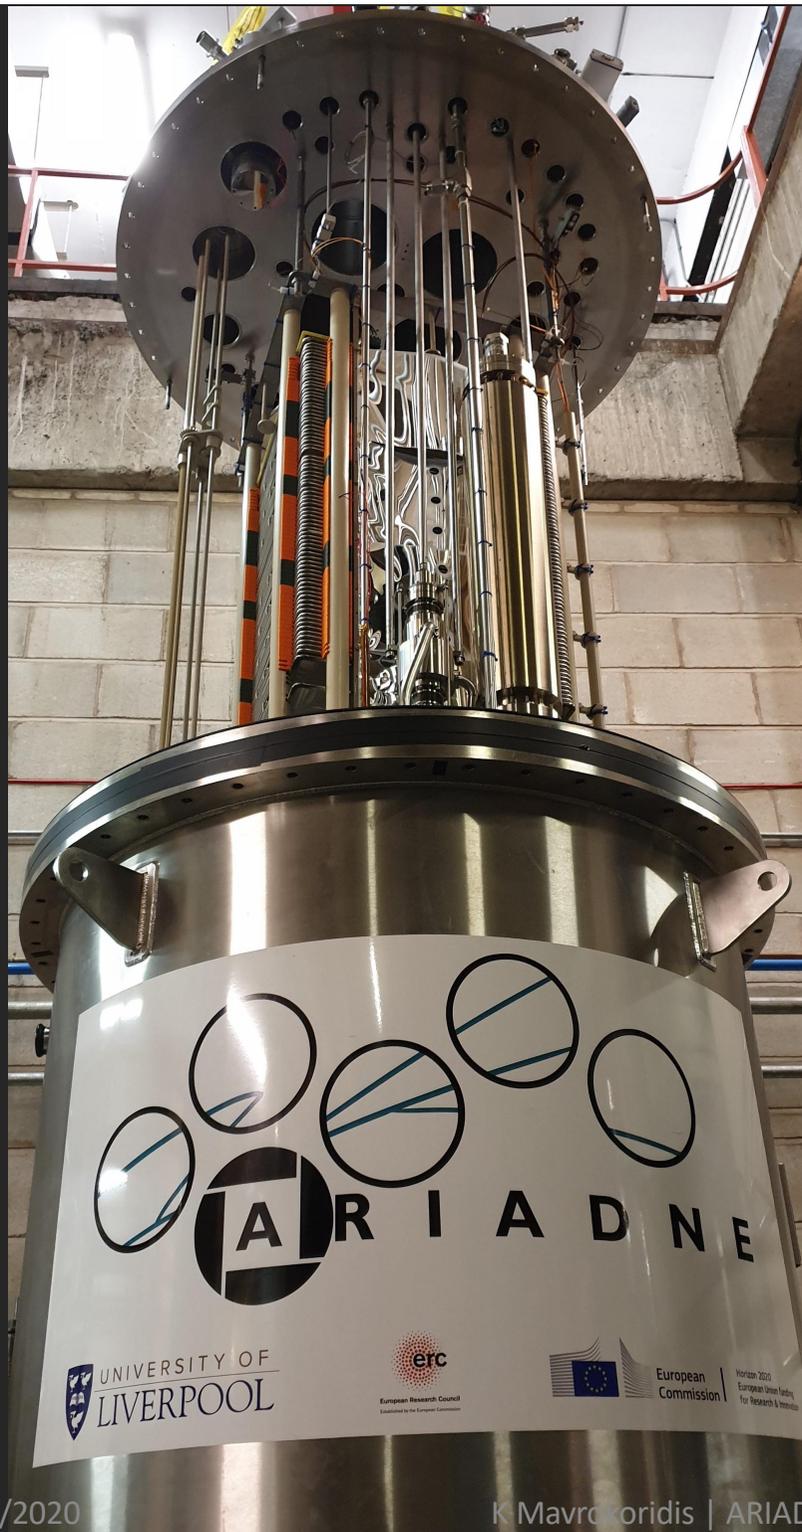

ARIADNE upgrades at Liverpool


Back to Liverpool - New THGEM

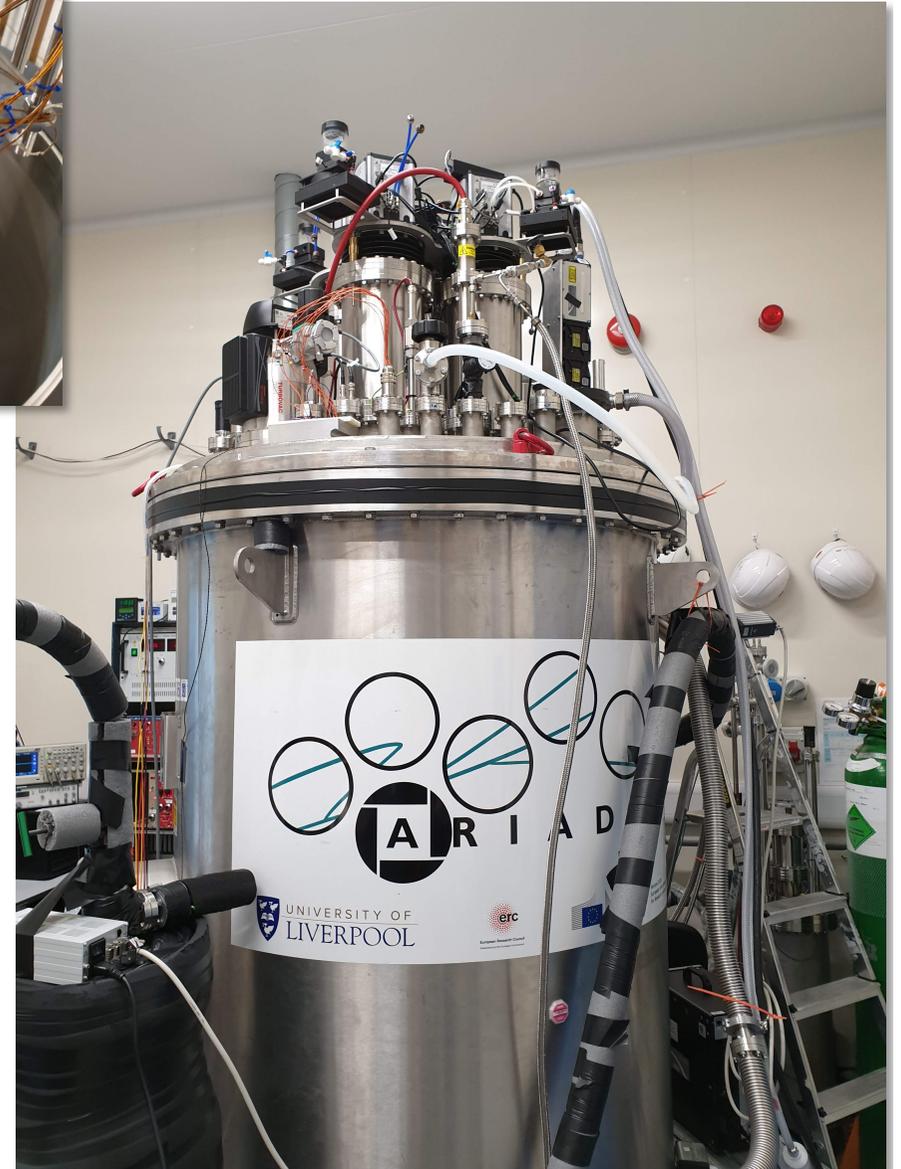

EMCCD LAr run New Results



UNIVERSITY OF
LIVERPOOL

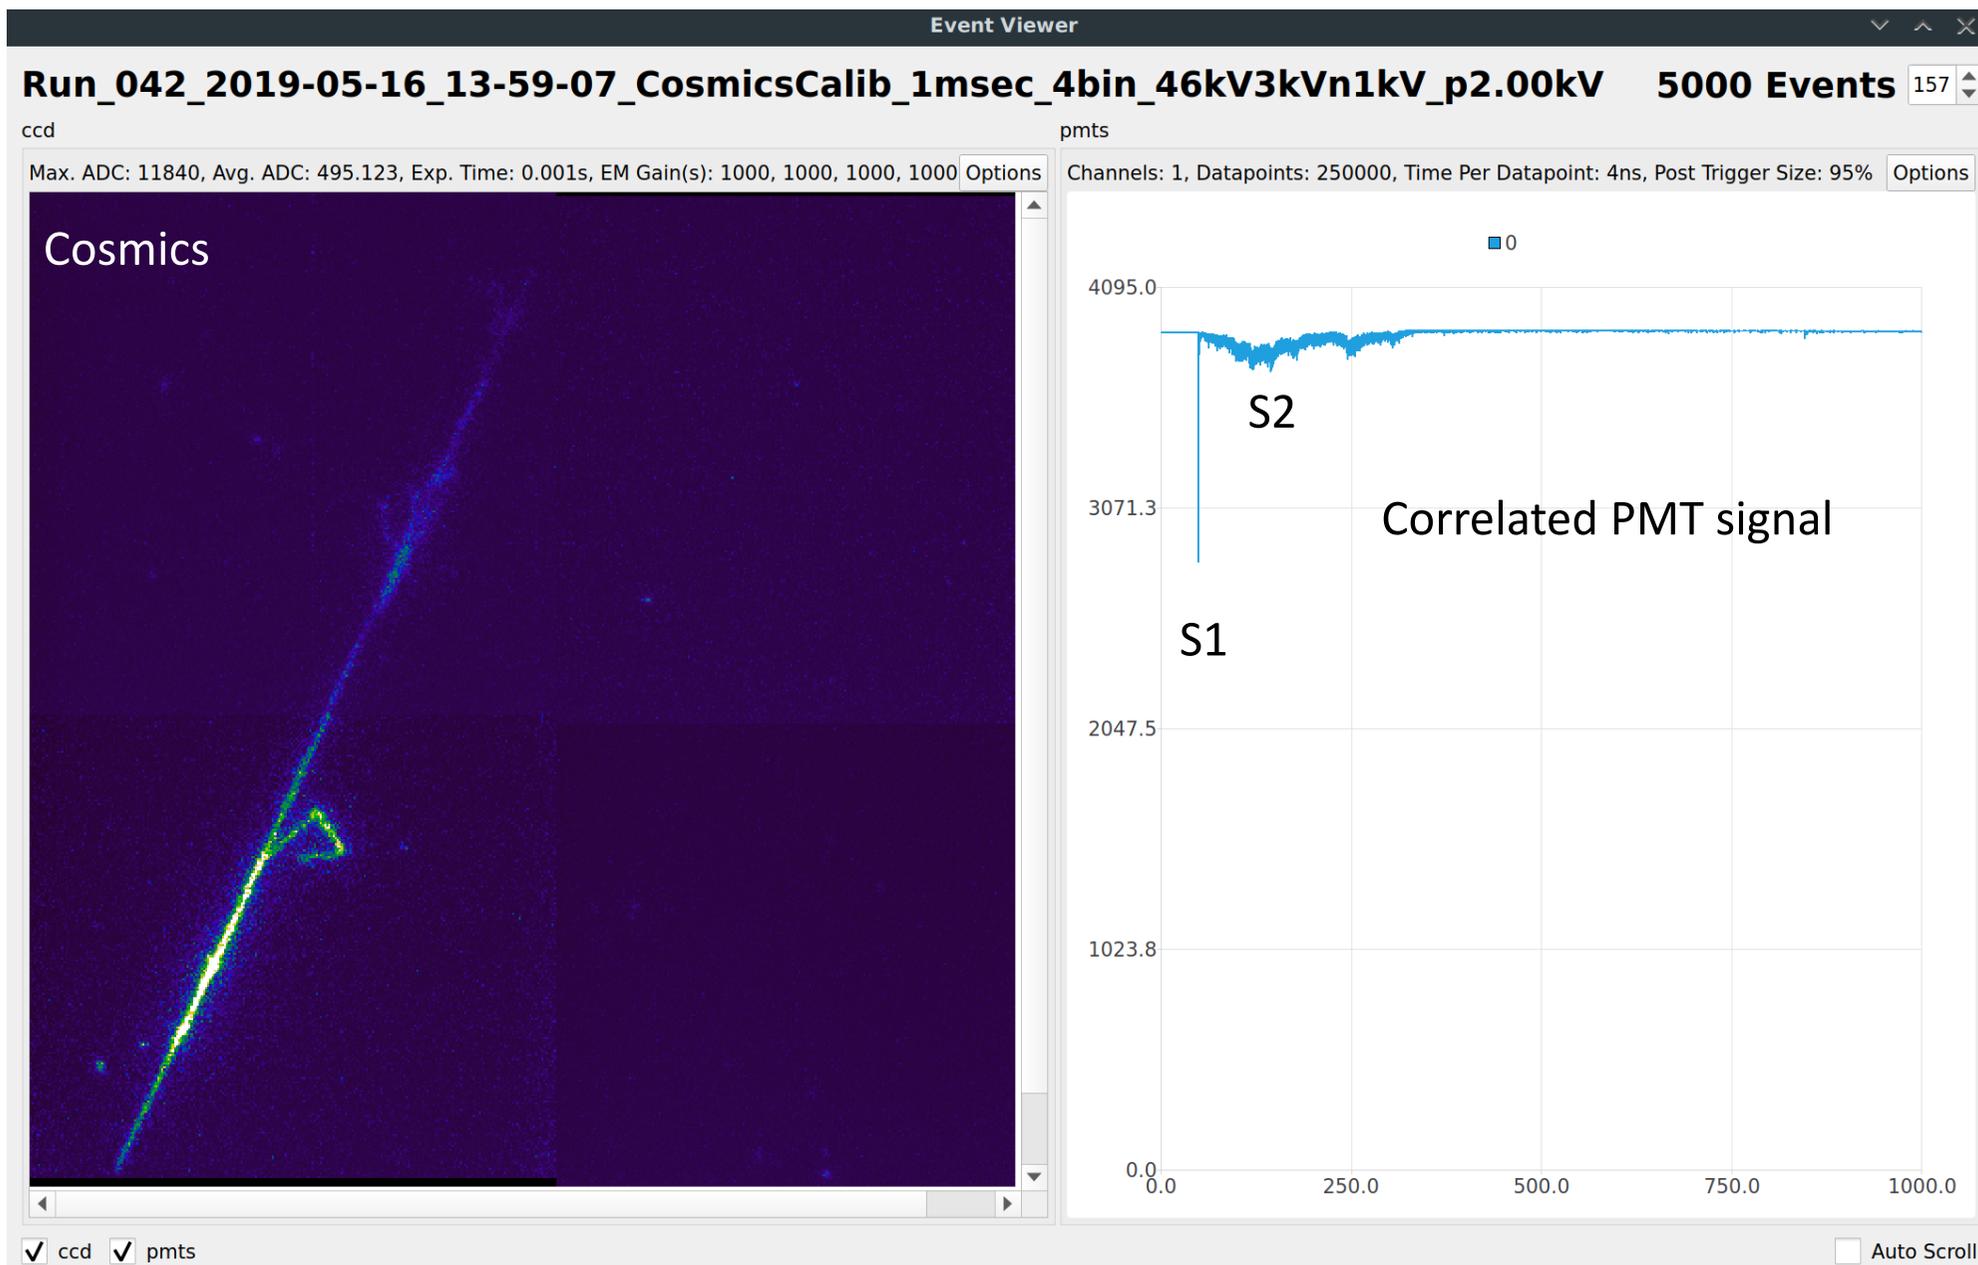

EMCCD LAr run New Results

Event Viewer



Run_042_2019-05-16_13-59-07_CosmicsCalib_1msec_4bin_46kV3kVn1kV_p2.00kV 5000 Events 185

ccd

pmts

Max. ADC: 7045, Avg. ADC: 513.071, Exp. Time: 0.001s, EM Gain(s): 1000, 1000, 1000, 1000 Options


Channels: 1, Datapoints: 250000, Time Per Datapoint: 4ns, Post Trigger Size: 95% Options

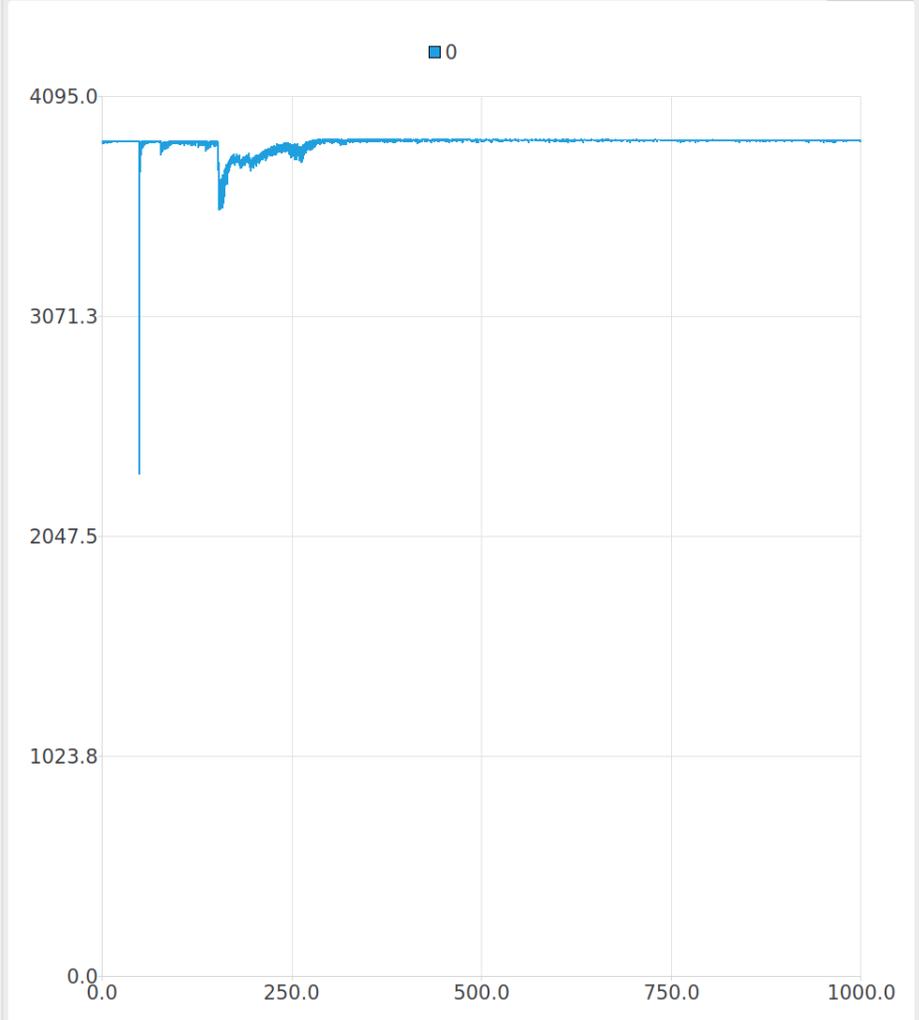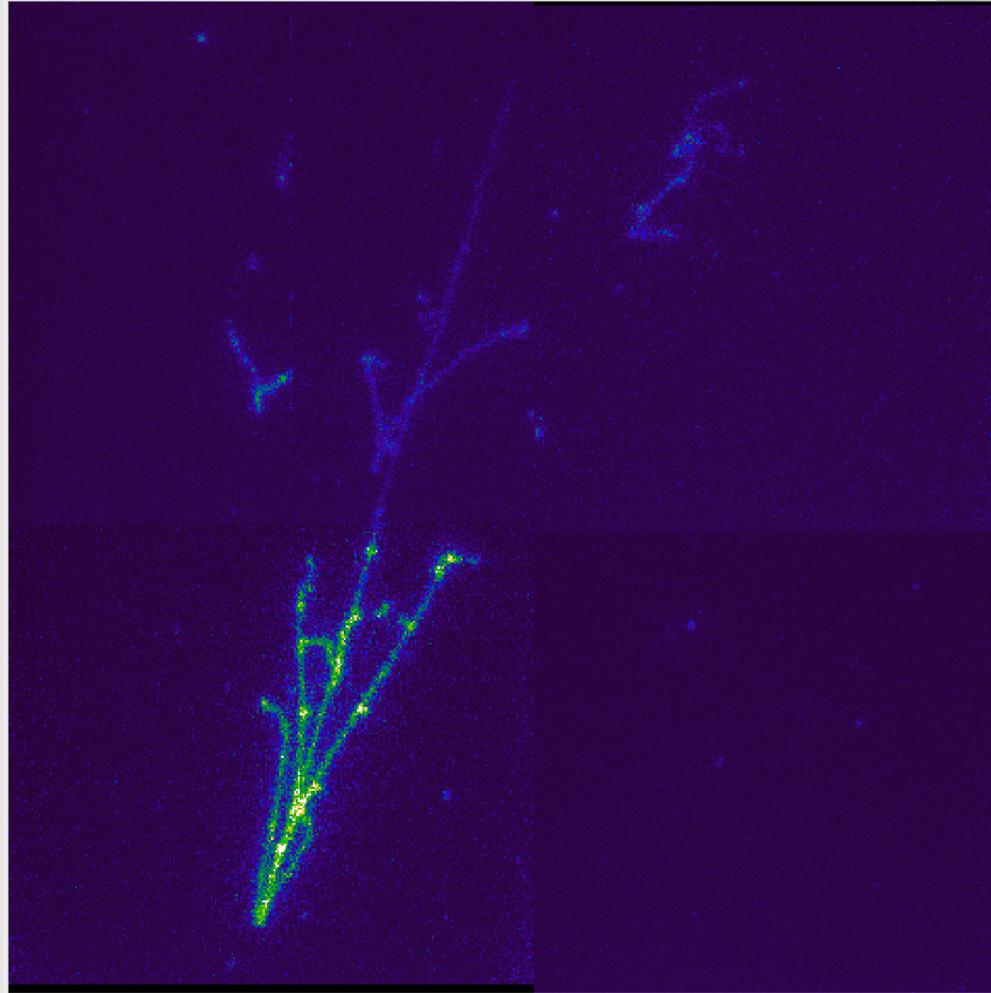

ccd pmts


Auto Scroll


EMCCD LAr run New Results

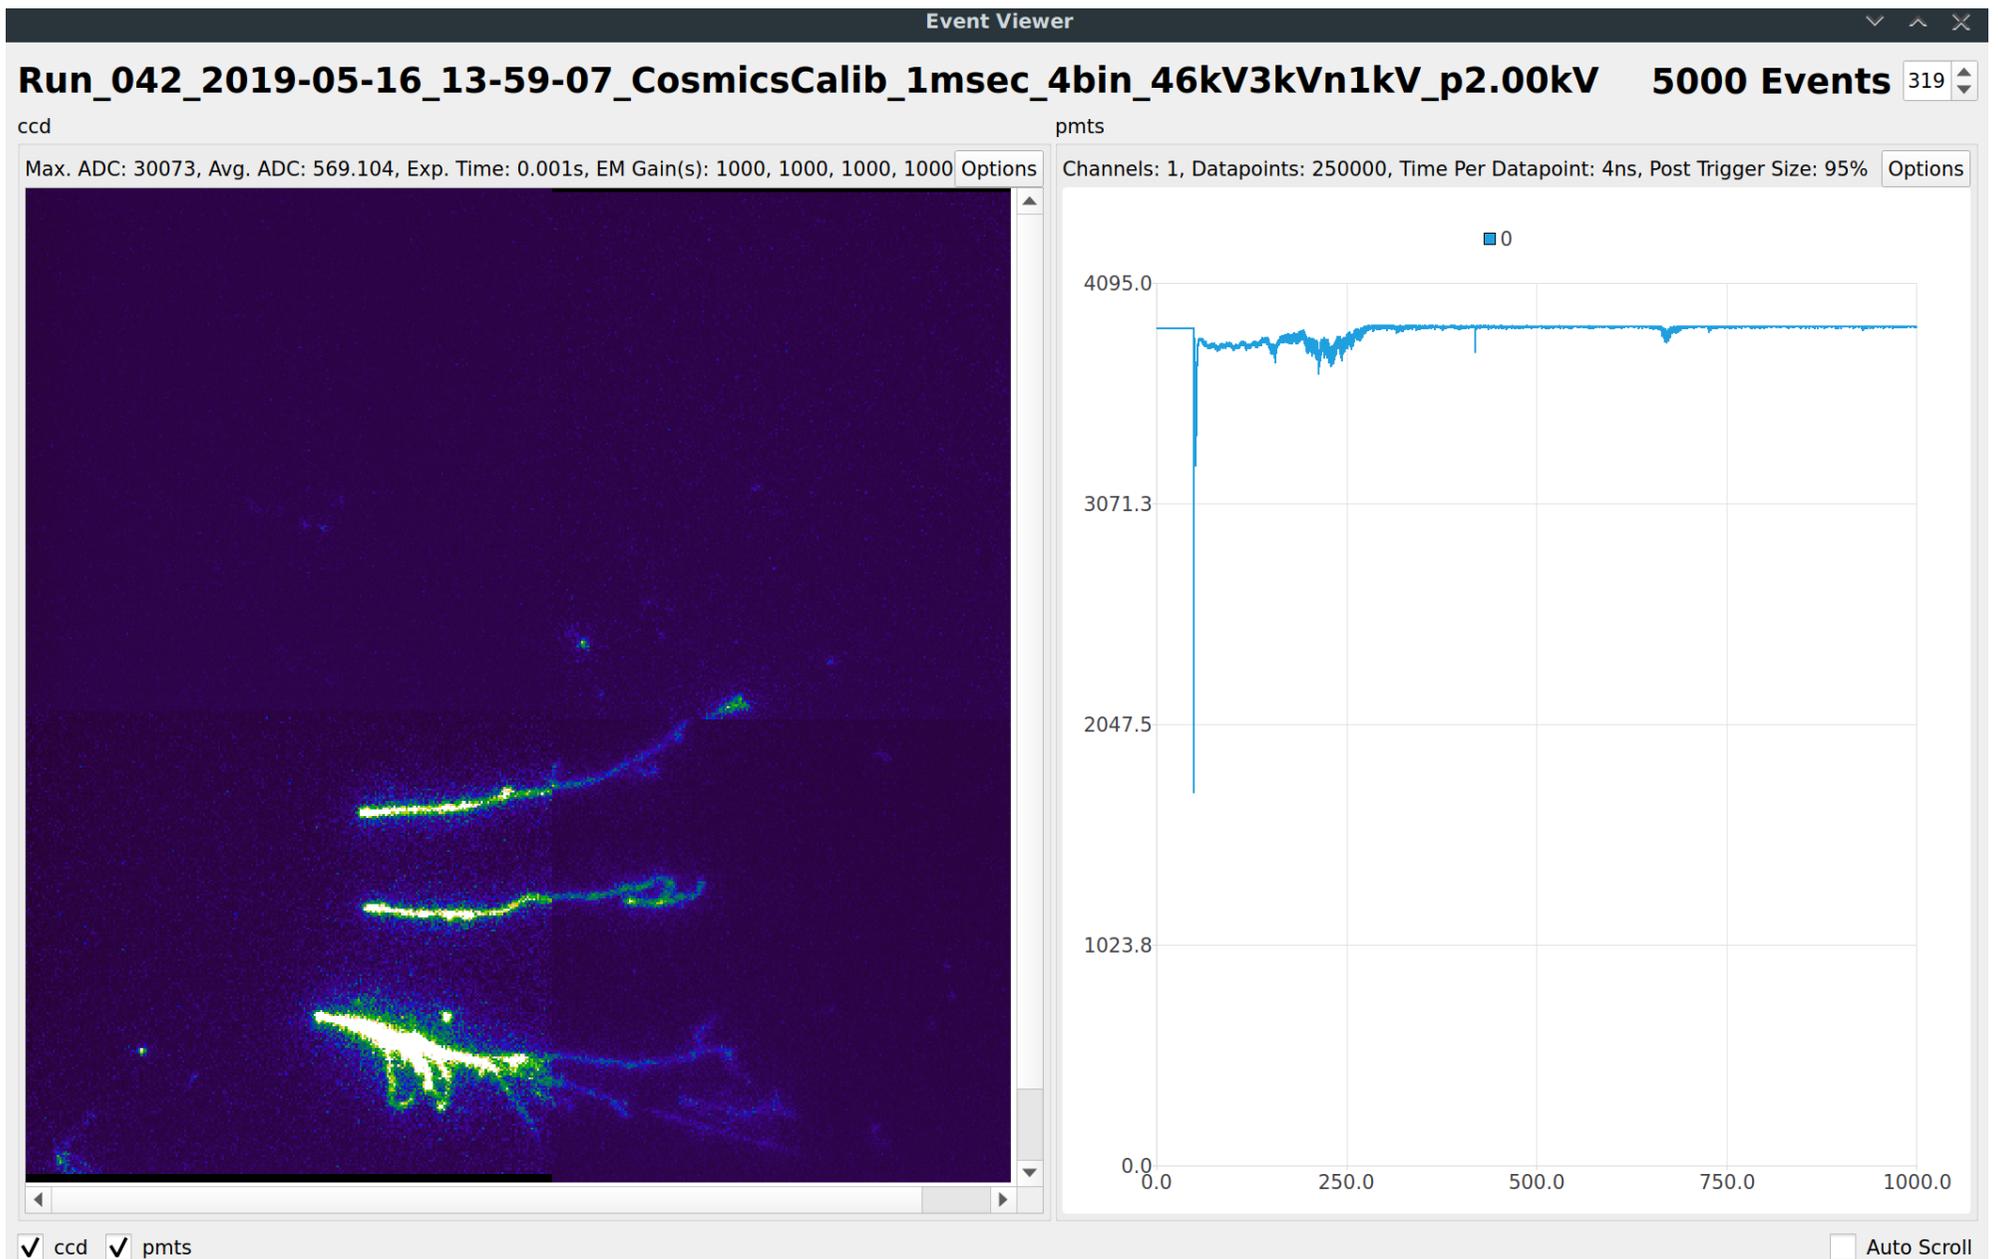

EMCCD LAr run New Results


Video: 1 msec exposure, 4x4 binning, PMT correlation

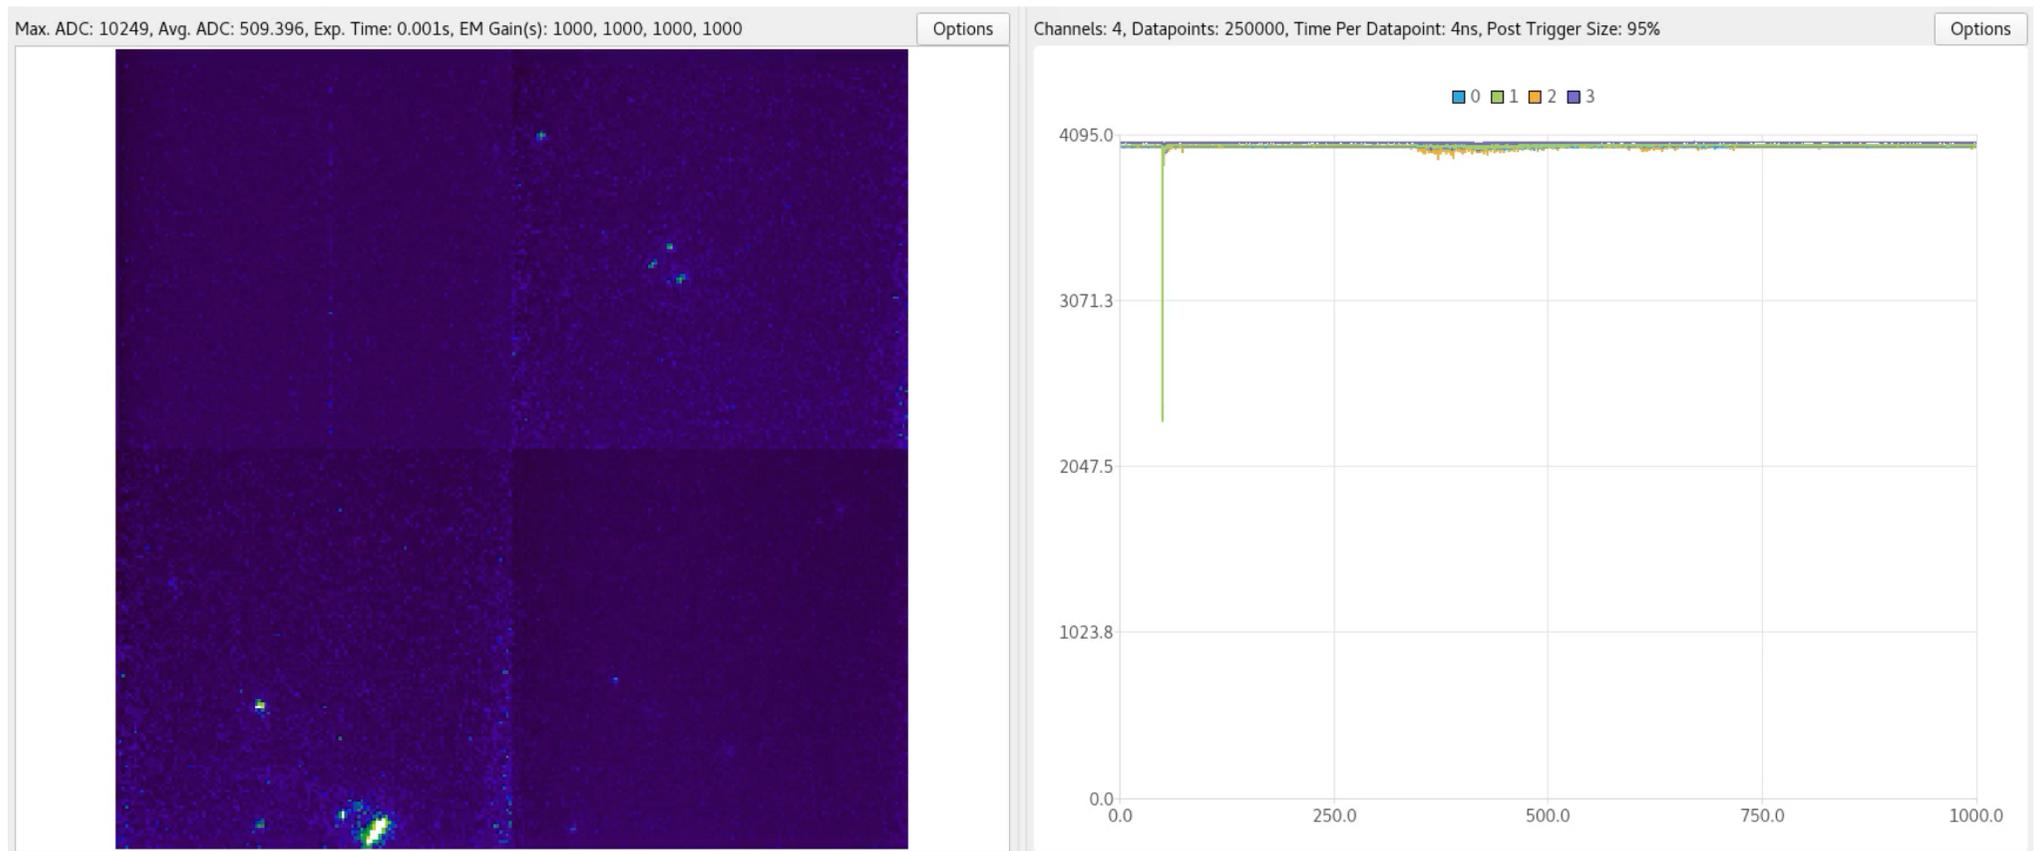

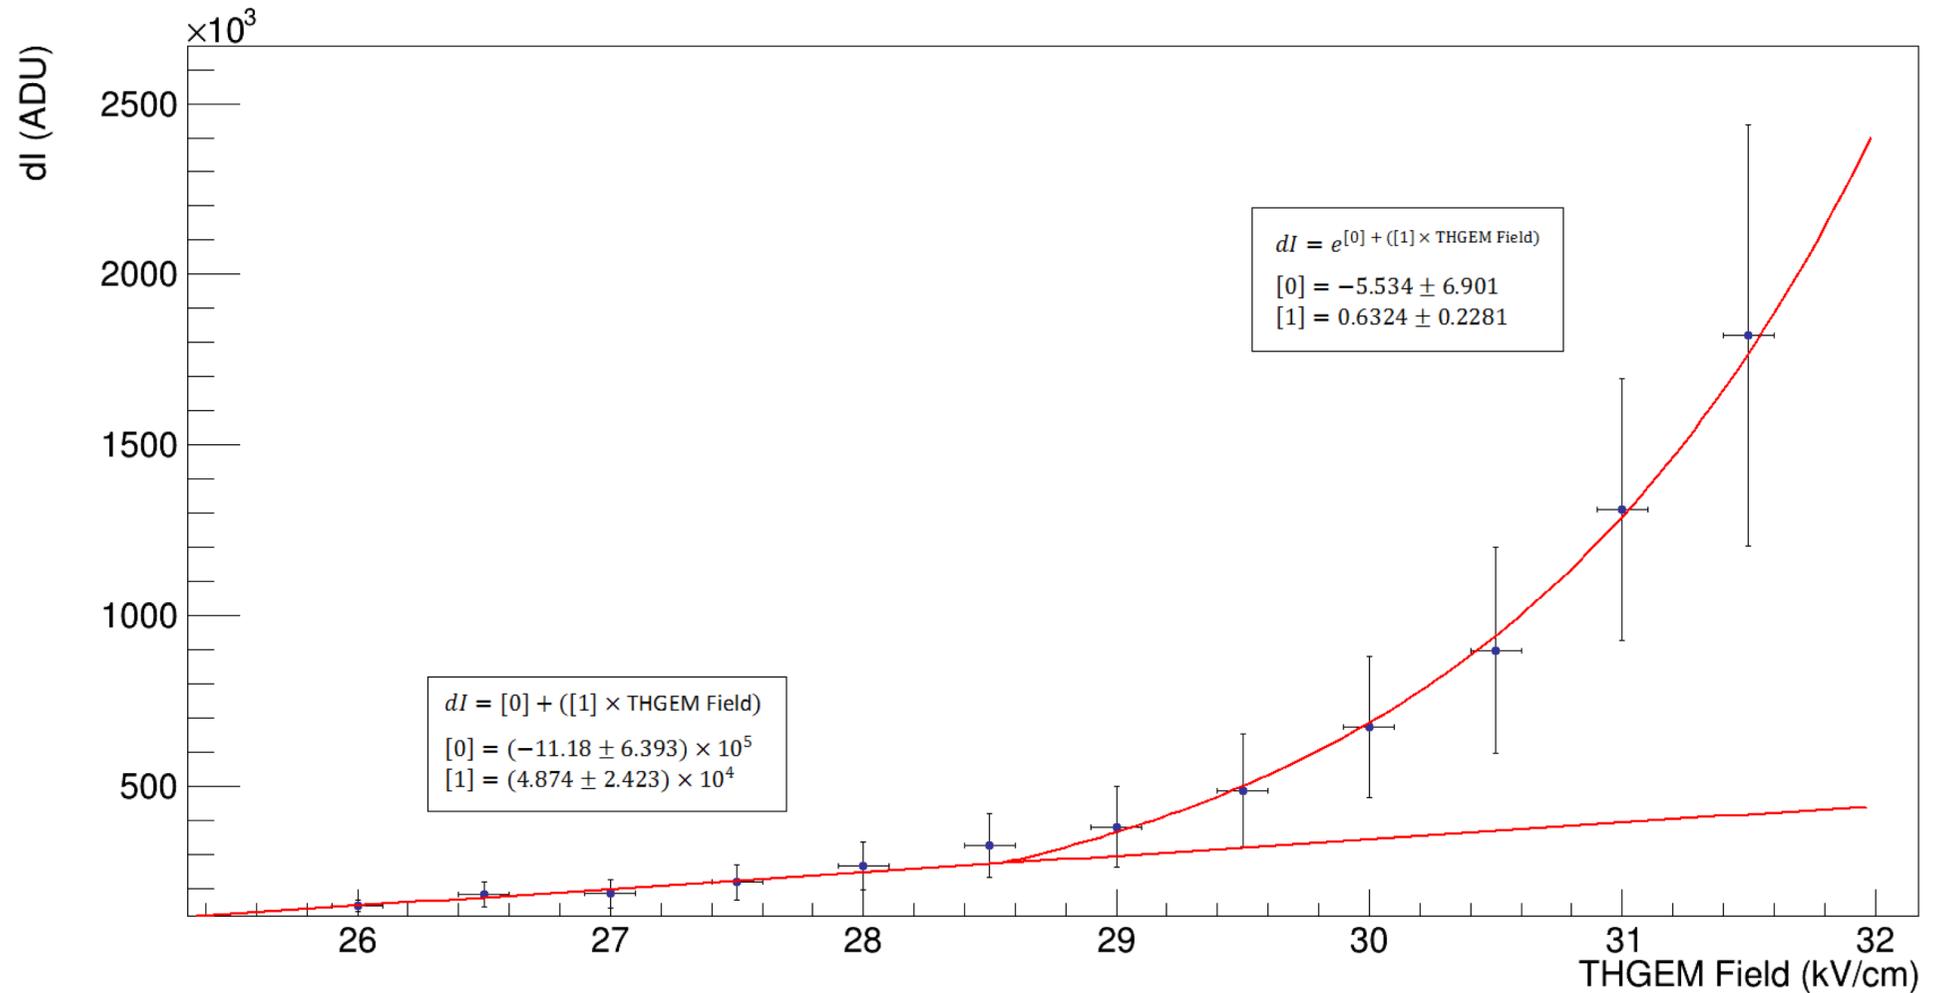

Scanning THGEM bias -light sensitive at low THGEM bias

EMCCD Binning

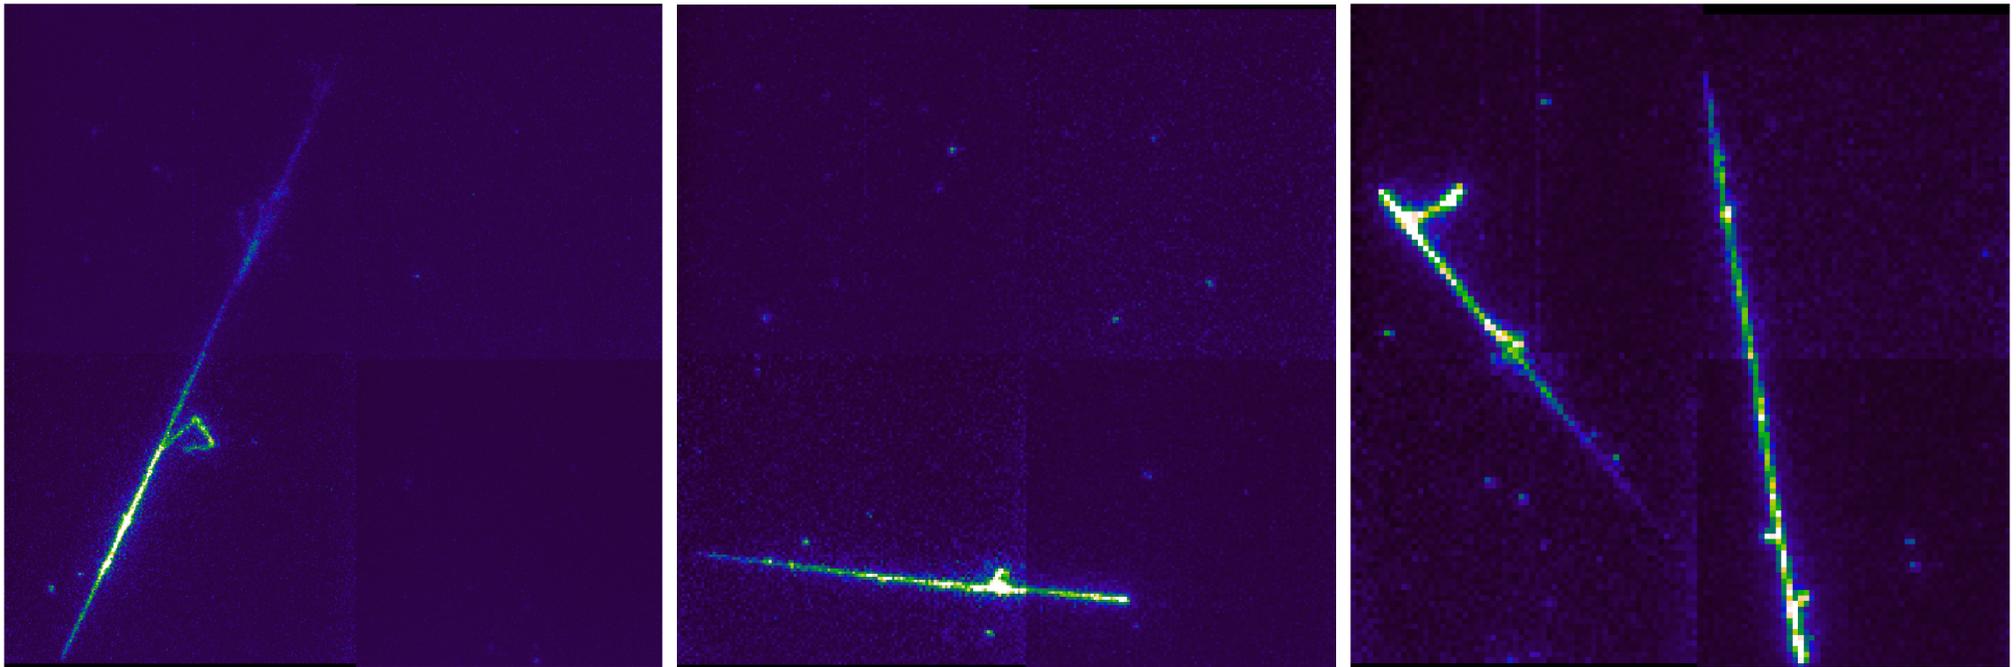


0.5 m

4x4 (1.1mm/pix)

8x8 (2.2 mm/pix)

16x16 (4.4mm/pix)

- 16x16 binning = 4.4mm/pixel, for **kton scale** LArTPC detectors **resolution** will be limited by **electron diffusion** (~4.2mm over 12m drift).

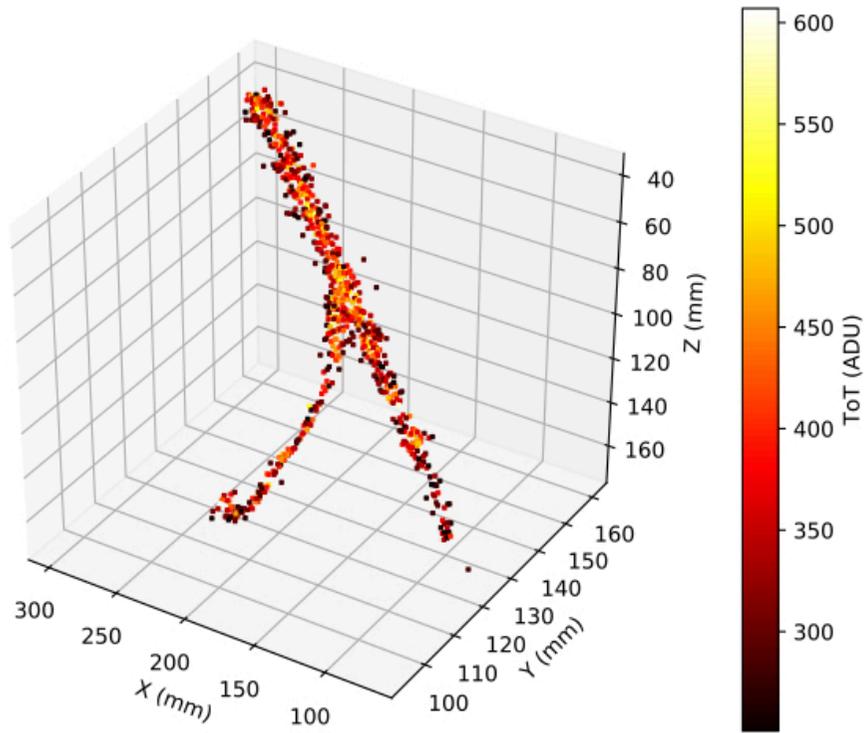

ARIADNE: now a dream 3D optical TPC with TPX3 Camera

EMCCD Limitations

- Great resolution and sensitivity, however acquisition rate of EMCCD sensors ($\sim 50\text{Hz}$) is slow compared to the drift speed of LAr TPCs ($\sim 2\text{mm}/\mu\text{s}$)
- Can only provide flattened 2D representation of event geometries
- Z-axis can be calculated from timing information from S1 and S2 signals from PMTs - however only possible for simple track geometries and in low-pile up situations as correlation is challenging

The MUCH faster TPX3 readout can give full 3D readout!

(whilst still having the sensitivity of EMCCDs)

2D -> Full 3D Readout

Silicon pixel readout chip developed by the Medipix collaboration. **Very well established** technology at CERN.

Simultaneous 10 bit Time over Threshold (ToT) and 18 bit Time Of Arrival (TOA).


ToT allows accurate calorimetry measurements.

TOA accurate timing and 3D reconstruction.

“Data driven readout”: pixels read out asynchronously, allows very efficient sparse readout.

Possible to have continuous trigger-free readout.

Until recently only used to measure deposited charge, now also light [1].

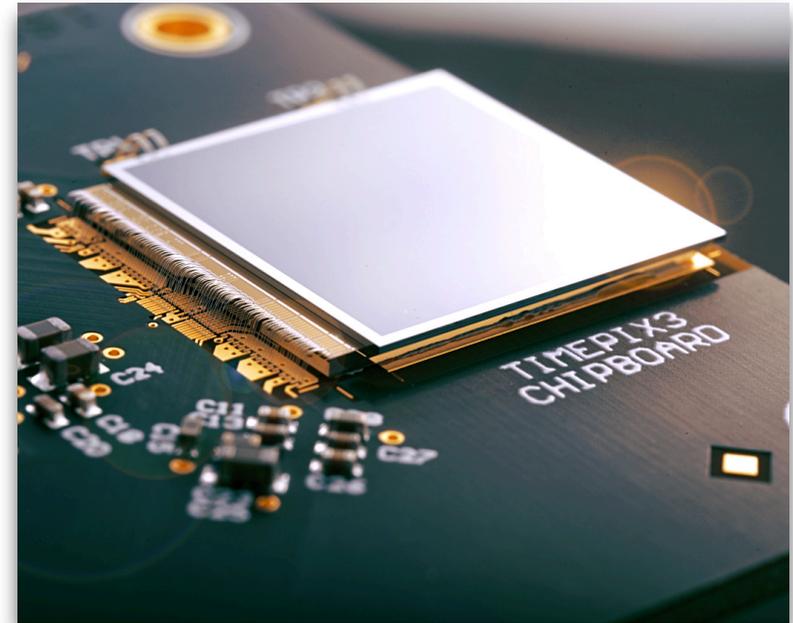


Sensor resolution	256x256 pixels
Pixel size	55 μ m x 55 μ m
Max readout rate	40Mhits \cdot cm ⁻² \cdot sec ⁻¹
Time resolution	1.6 ns

[1] M. Fisher-Levine, A. Nomerotski, Timepixcam: *a fast optical imager with time-stamping*, Journal of Instrumentation 11 (03) (2016) C03016.

TPX3Cam on a TPC



Initial tests on ARIADNE prototype TPC:

- Timepix3 chip bonded to a optical silicon pixel sensor.
- Combined with image intensifier.
- Tested on smaller TPC with 100mb CF₄ gas.
- Data taken of Americium-241 alpha source tracks and cosmic muons.

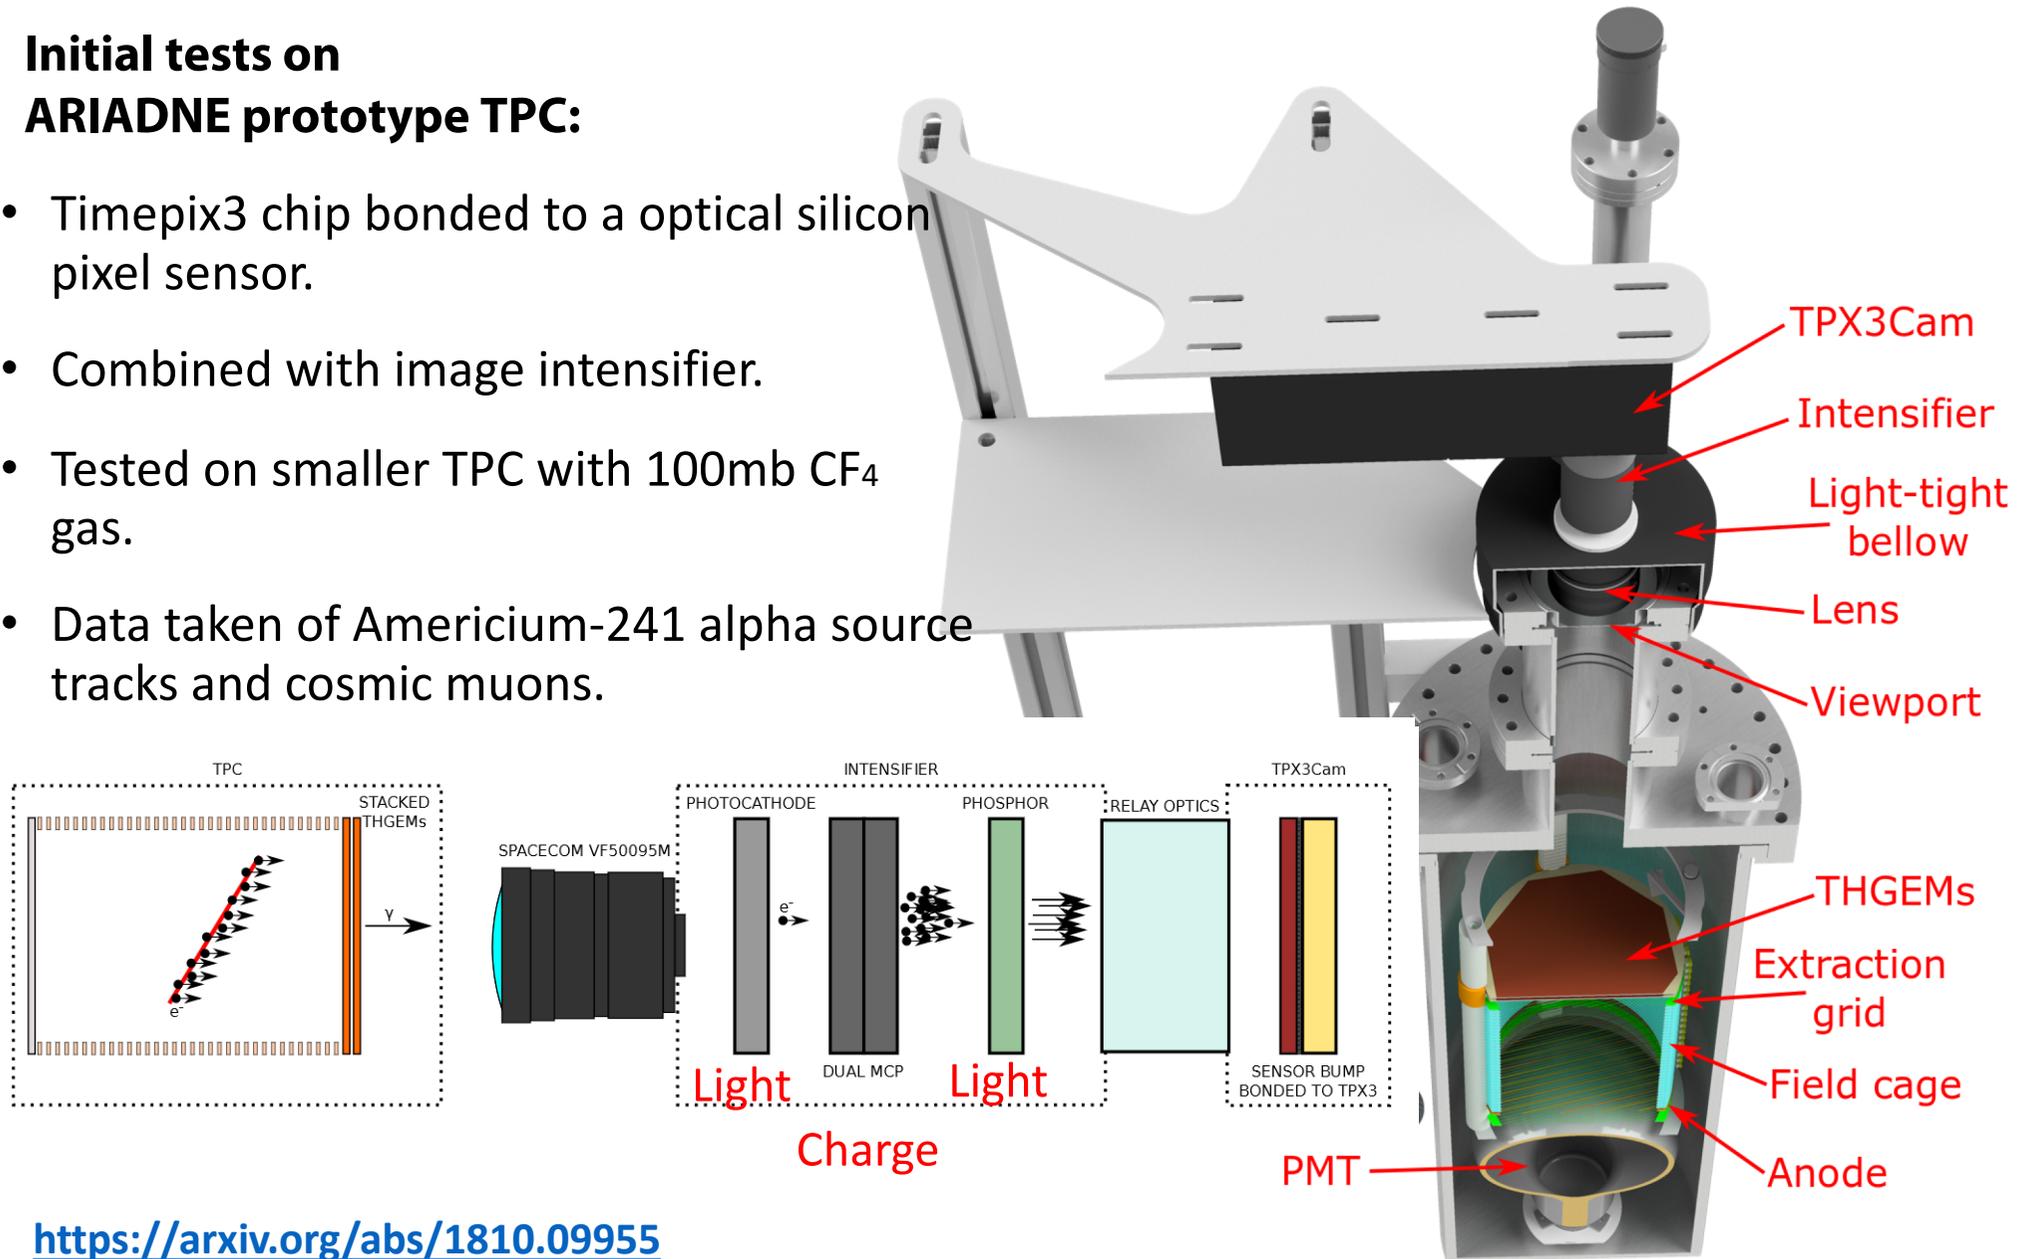


<https://arxiv.org/abs/1810.09955>

TPX3Cam First Results -Gas

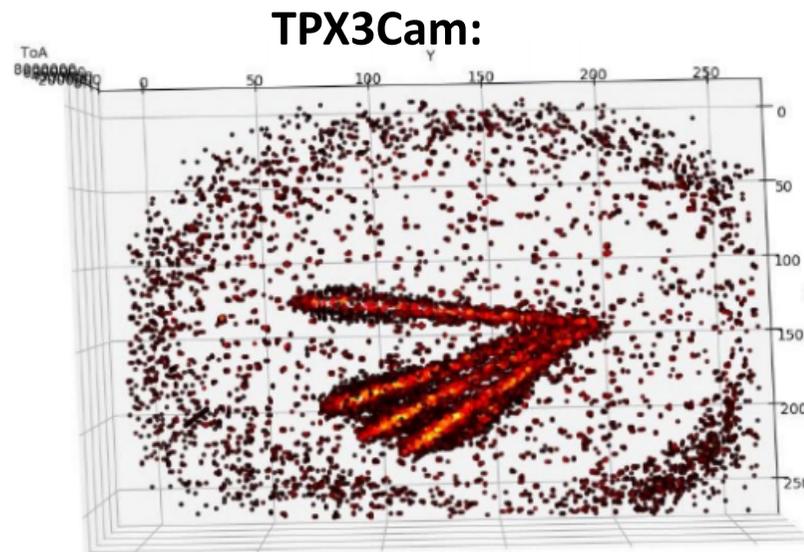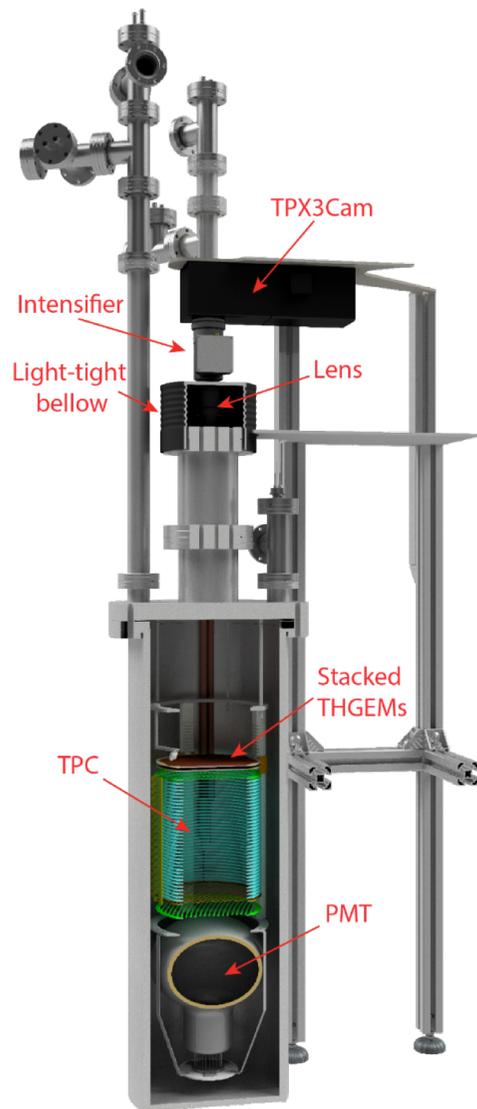

Alpha tracks in 100 mb CF₄

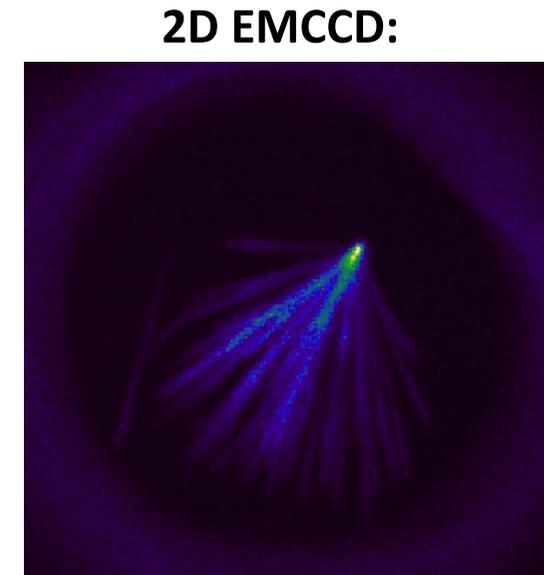




“Halo” is light reflected off stainless steel viewport tube.

- ToA information gives z coordinate. Simultaneous ToT gives intensity and enables calorimetry
- ✓ No complicated reconstruction required to build events in 3D
 - Eliminates any need to correlate, PMT signal/THGEM charge with the CCD camera in order to do full 3D



First demonstration of 3D optical readout of a TPC using a single photon sensitive Timepix3 based camera (<https://arxiv.org/abs/1810.09955>)

TPX3Cam First Results -Gas

First demonstration of 3D optical readout of a TPC using a single photon sensitive Timepix3 based camera (<https://arxiv.org/abs/1810.09955>)

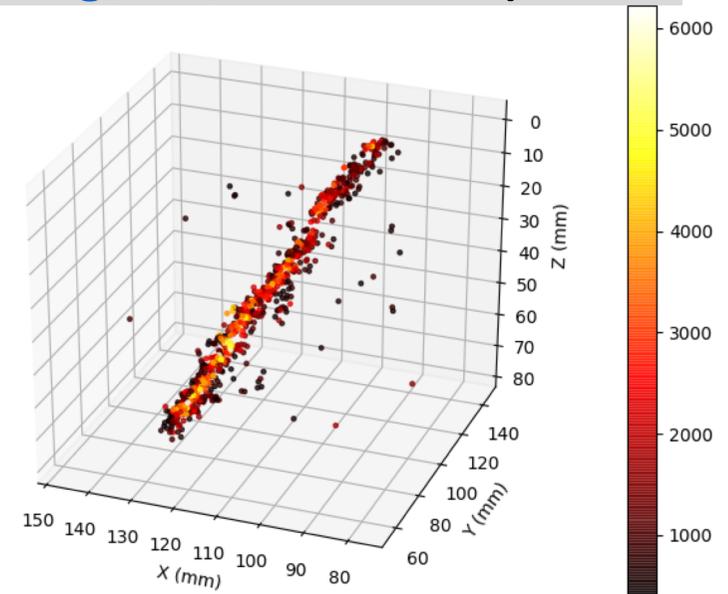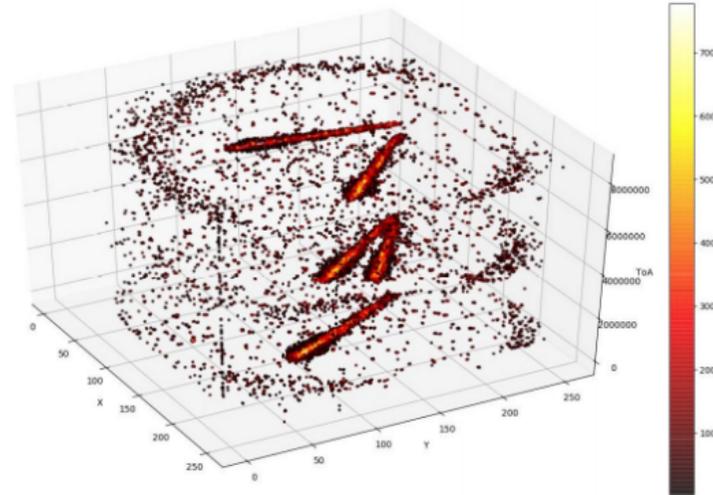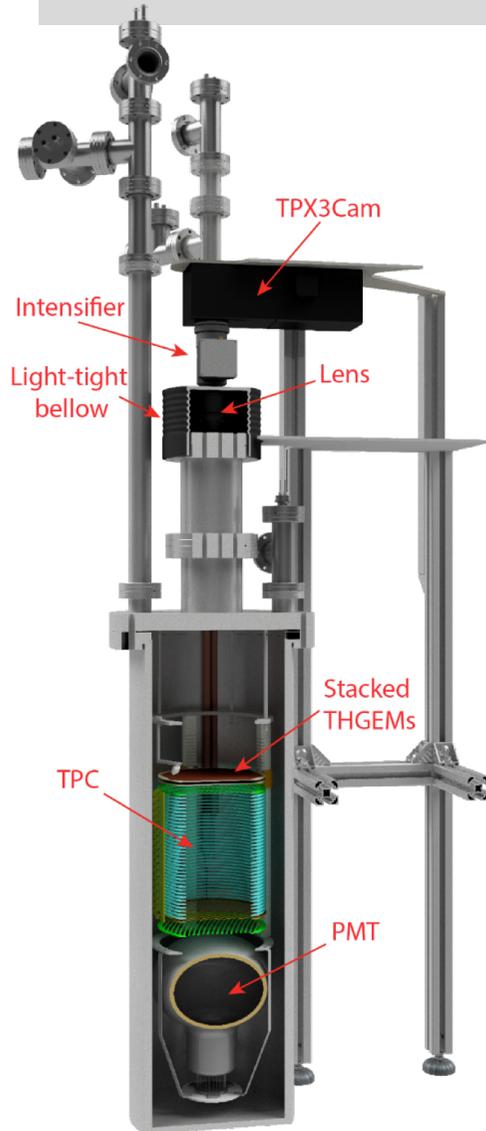


✓ Visible Bragg peak!

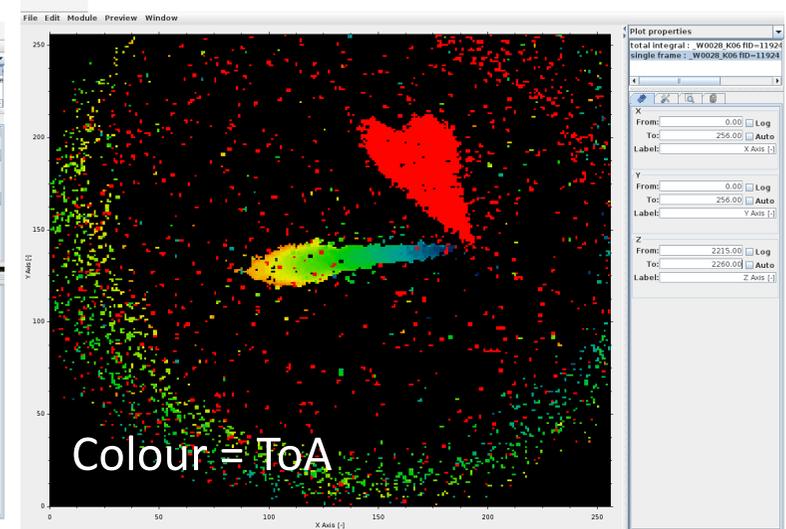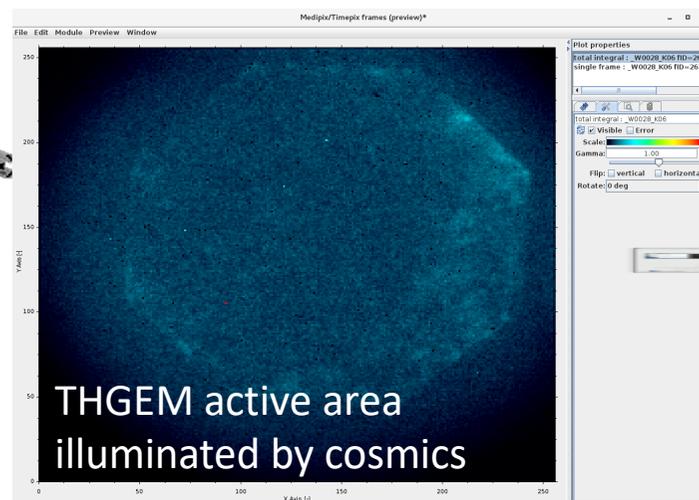


TPX3Cam First Results -Gas

Video: ToT 1 msec

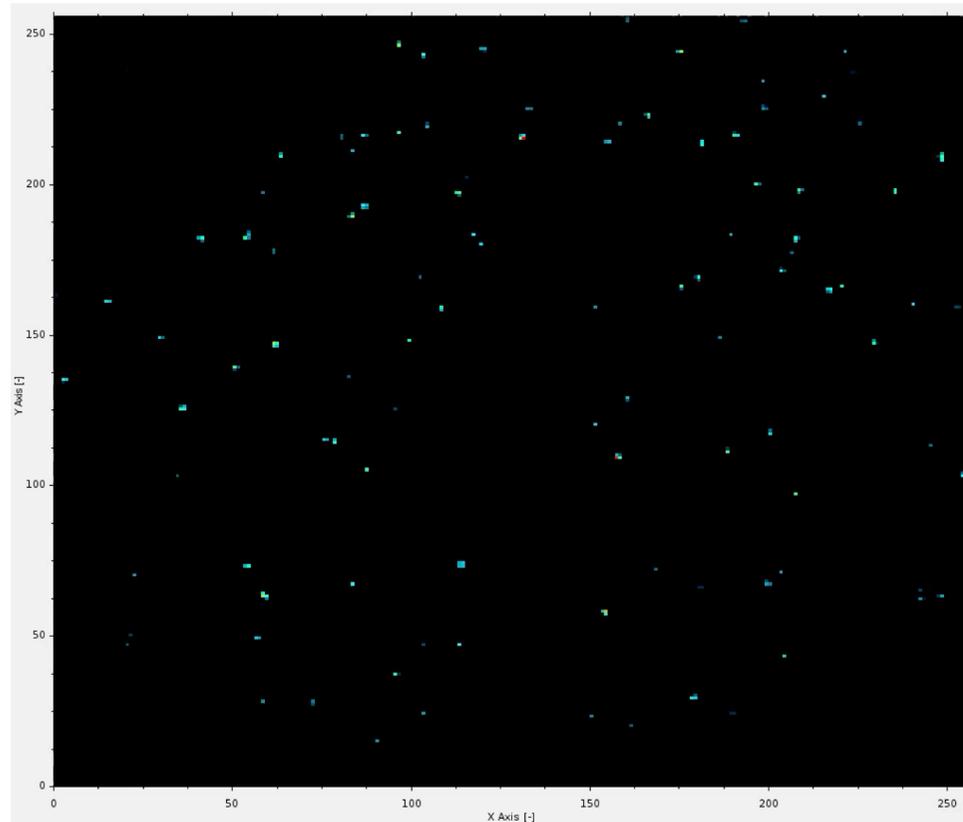


Video: ToA 1 msec

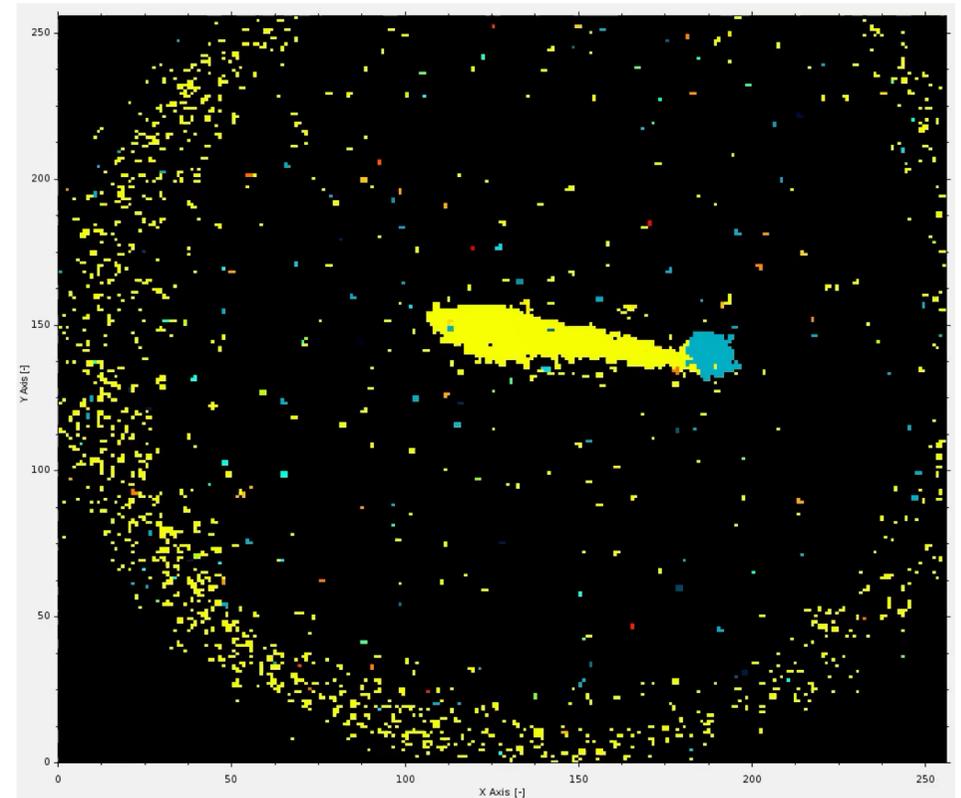


First demonstration of 3D optical readout of a TPC using a single photon sensitive Timepix3 based camera (<https://arxiv.org/abs/1810.09955>)

TPX3Cam First Results -Gas

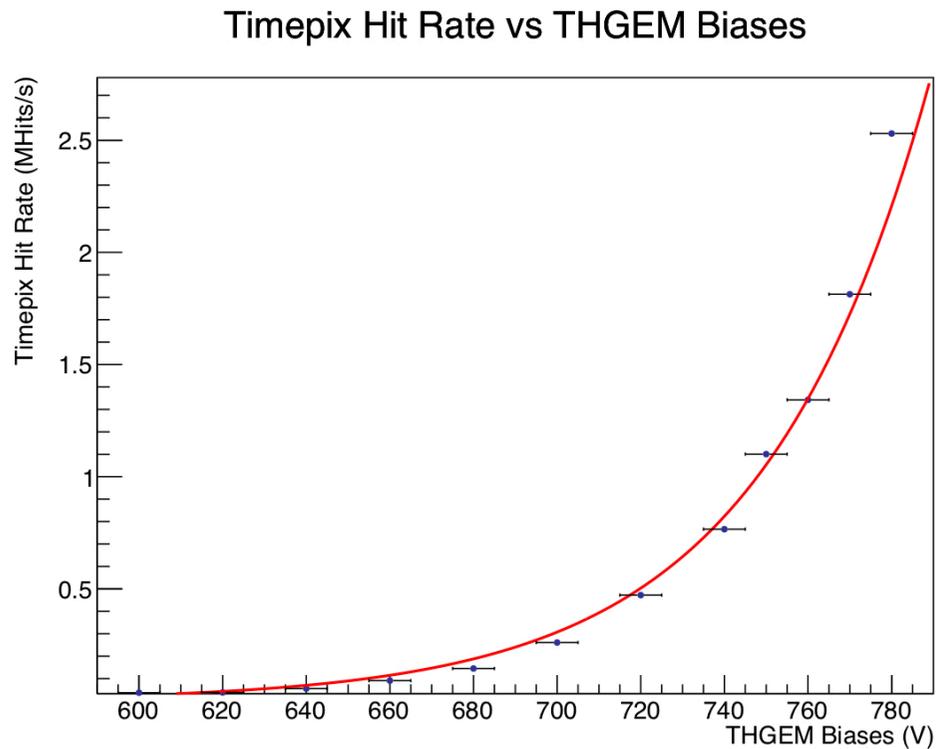


Camera pixel hit rate vs applied THGEM bias

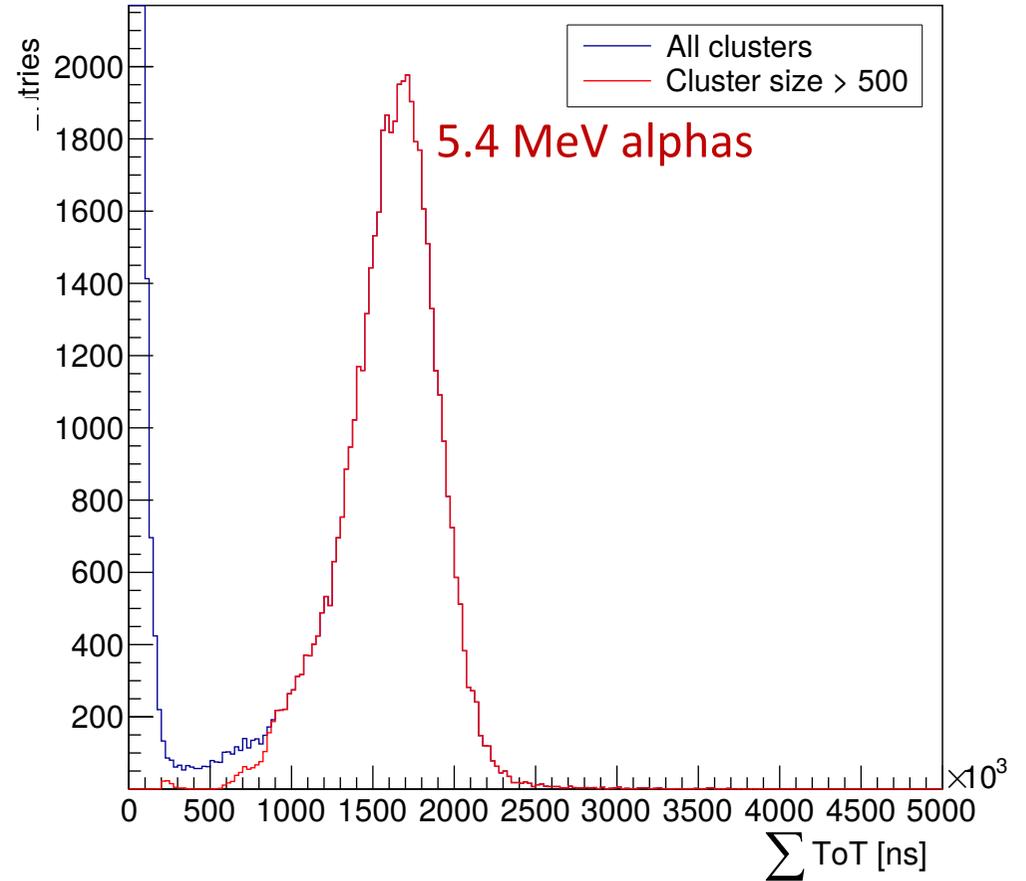

Histogram of sum ToT values for all hits for a sample of alpha tracks

<https://arxiv.org/abs/1810.09955>


Cosmics low pressure CF4

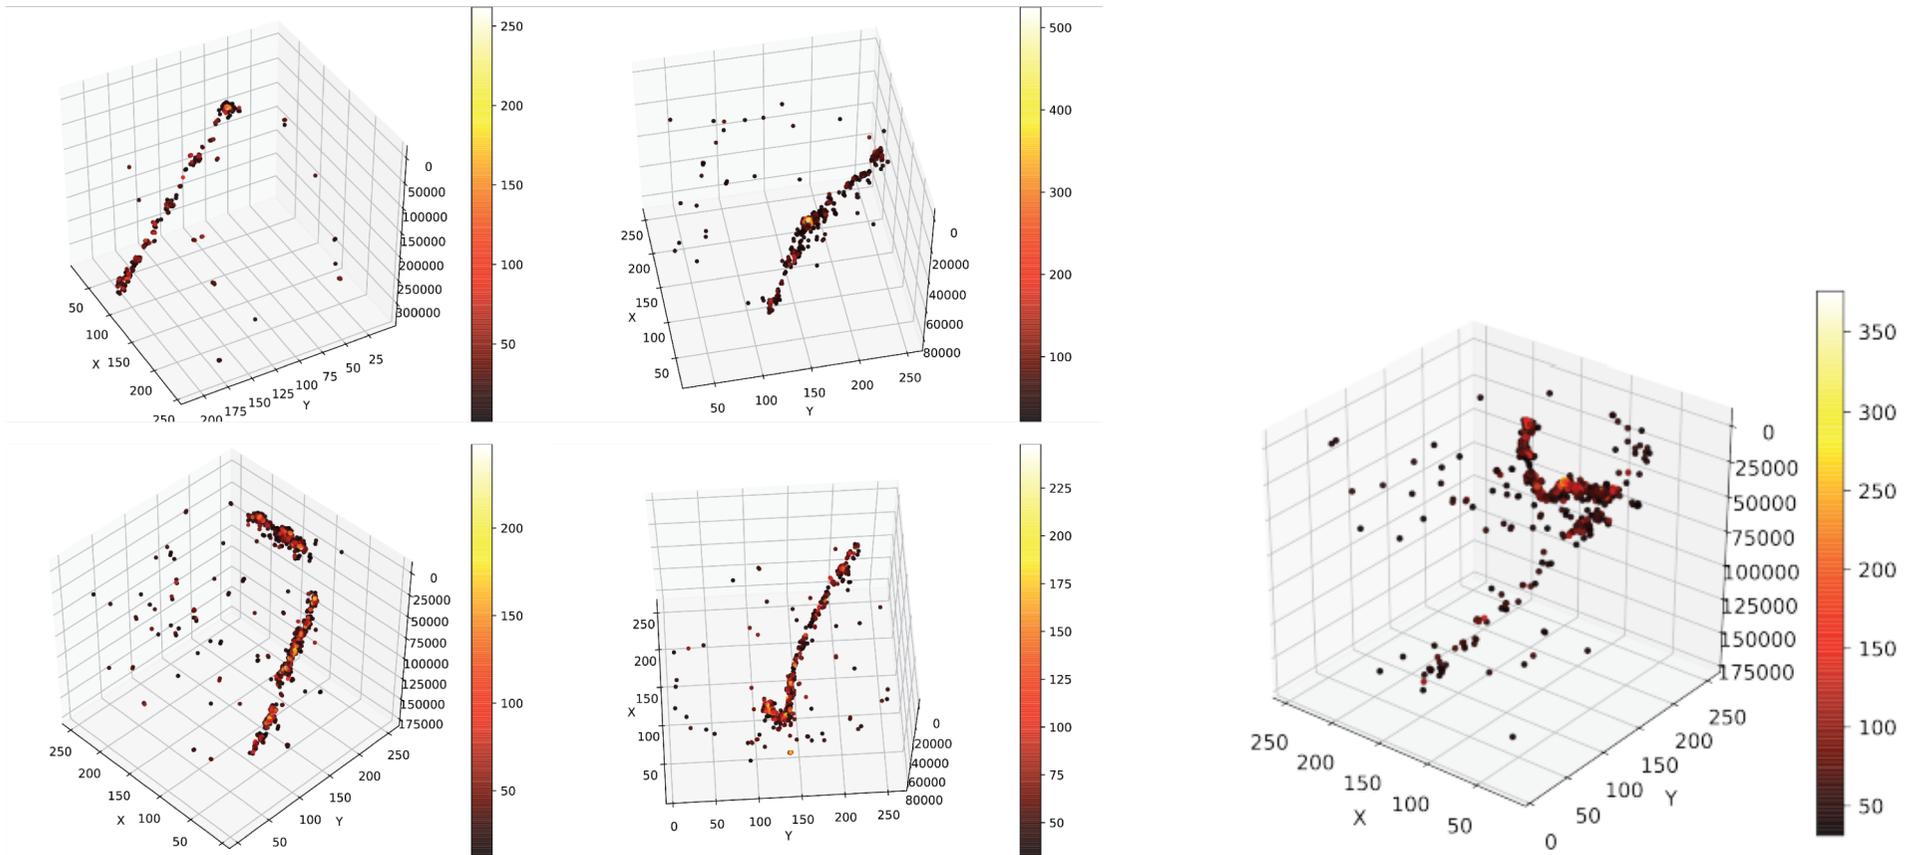


First demonstration of 3D optical readout of a TPC using a single photon sensitive Timepix3 based camera (<https://arxiv.org/abs/1810.09955>)

TPX3Cam on ARIADNE

More results being collected

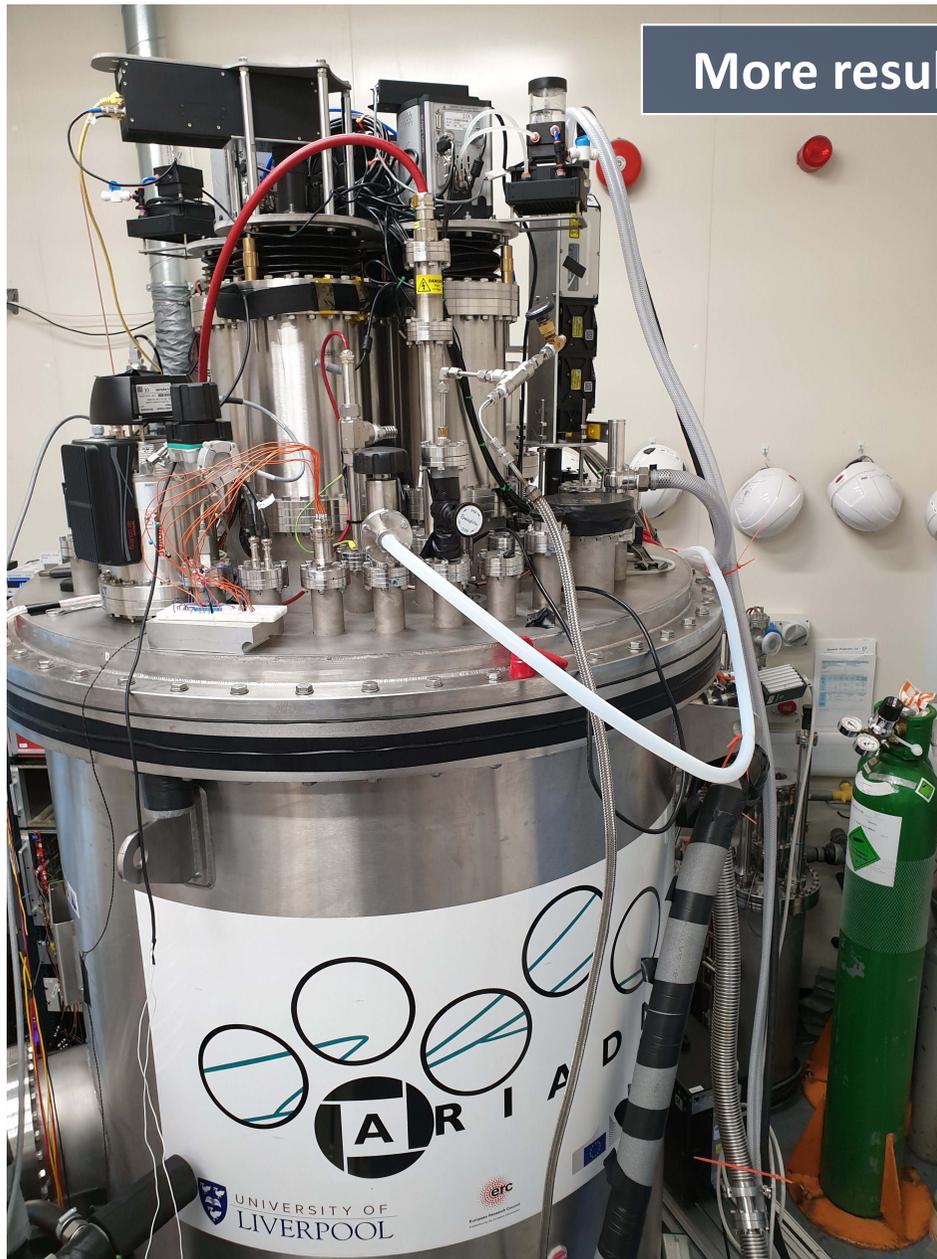

- One EMCCD replaced with TPX3Cam

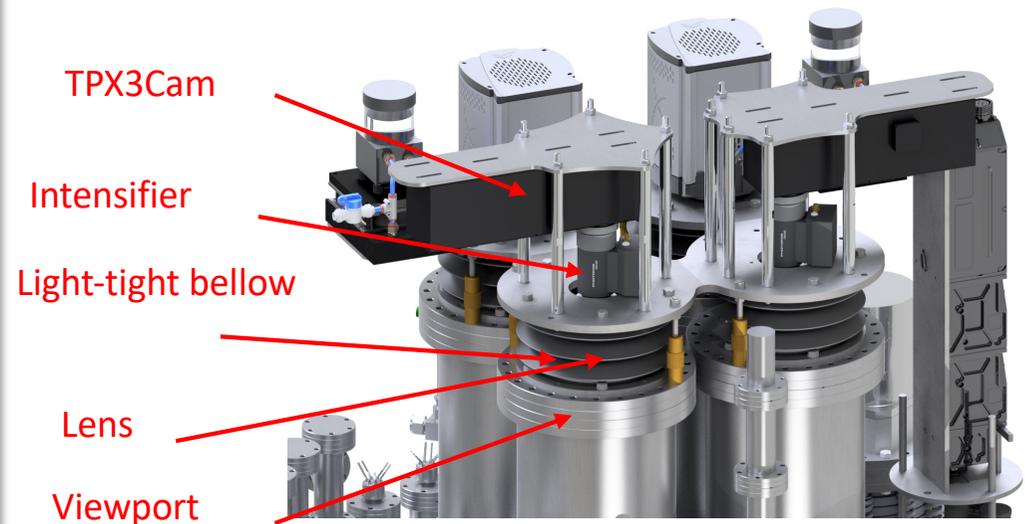


Intensifier Specs




Collaborating with
DESY for TPX3Cams
(Jochen Kuepper et. al)

Current intensifier output brightness : 0.5 cd/m^2
Final output brightness (typ) : 3.0 cd/m^2

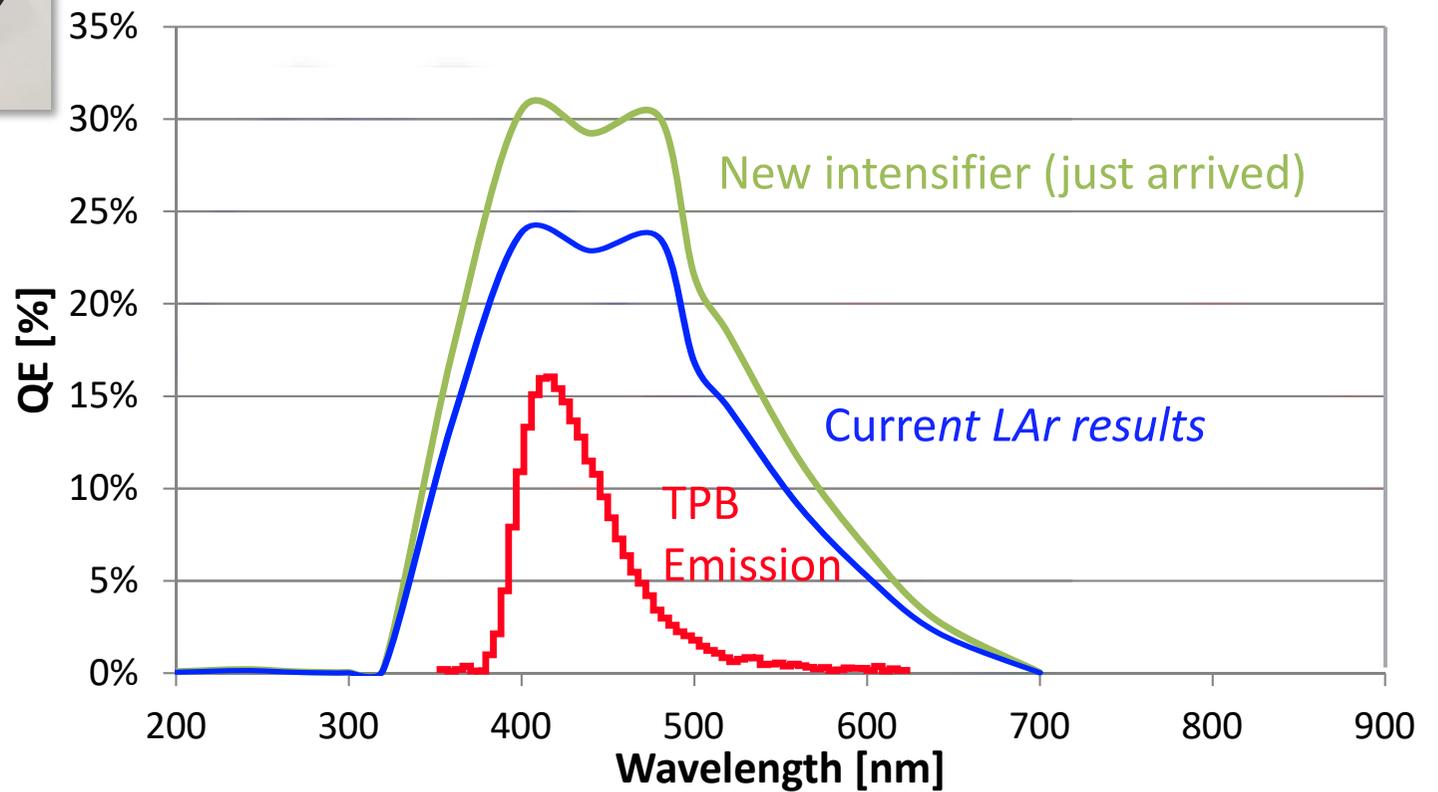


<https://arxiv.org/abs/1104.3259>

TPX3Cam LAr Results

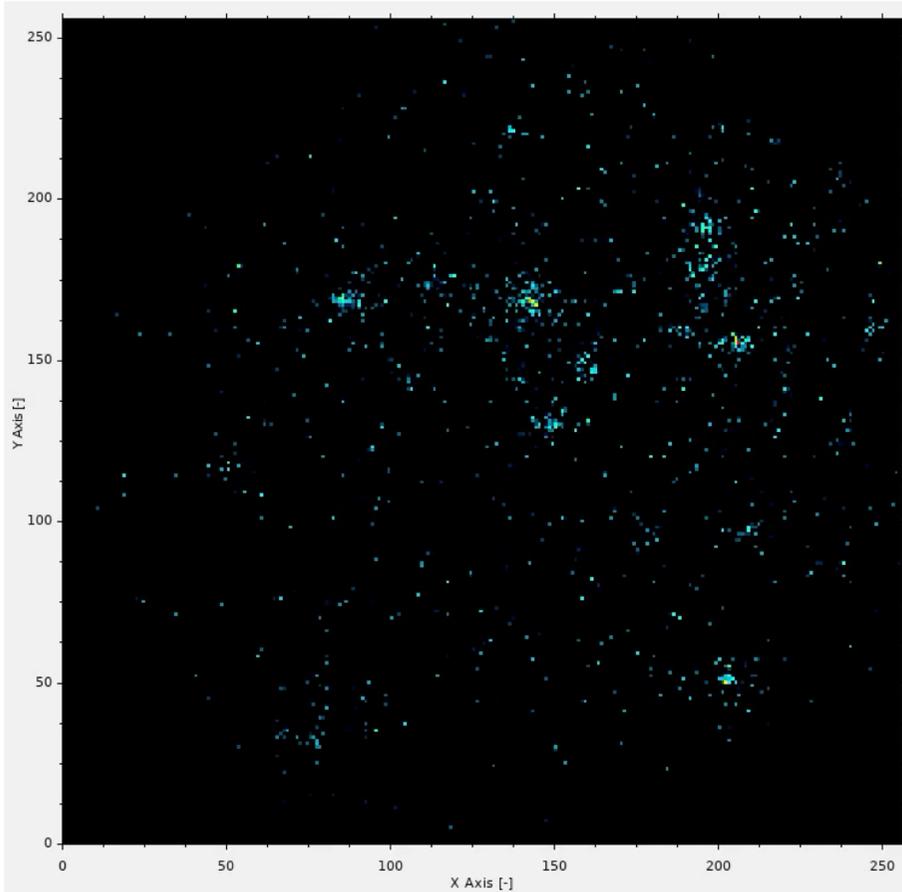


Video: ToT 100 msec

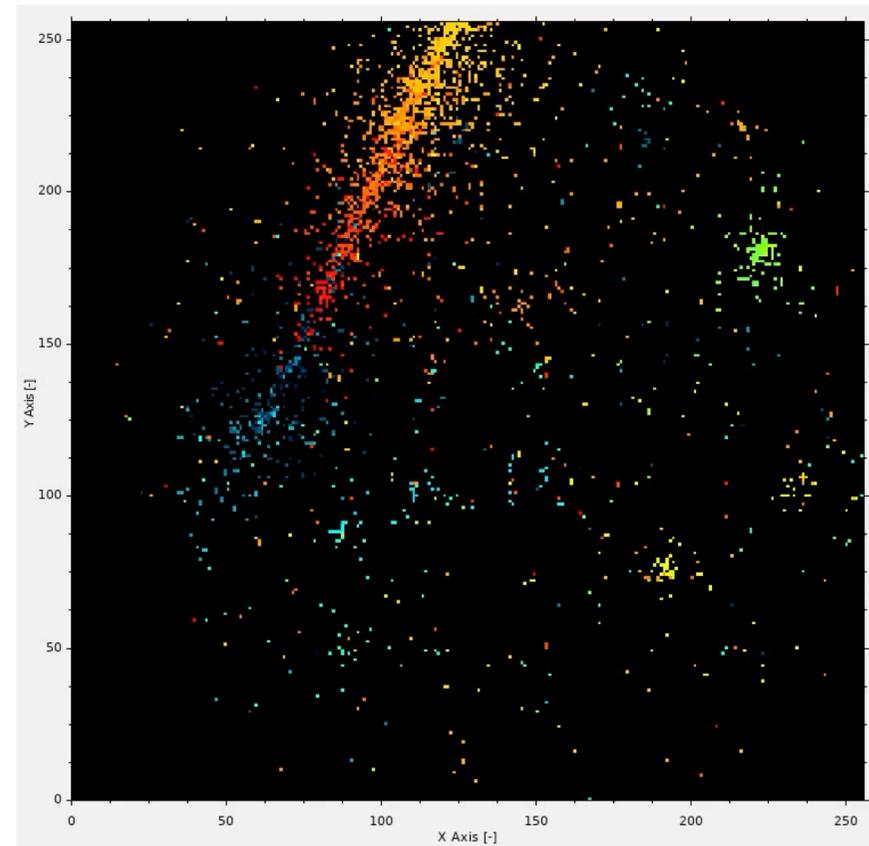

Video: ToA 50 msec

- Lower energy background gammas are also visible
- This low energy threshold is very useful for supernova studies
- Resolution is similar to 4x4 binning on the EMCCD ie 1.1mm/pixel

TPX3Cam LAr Results

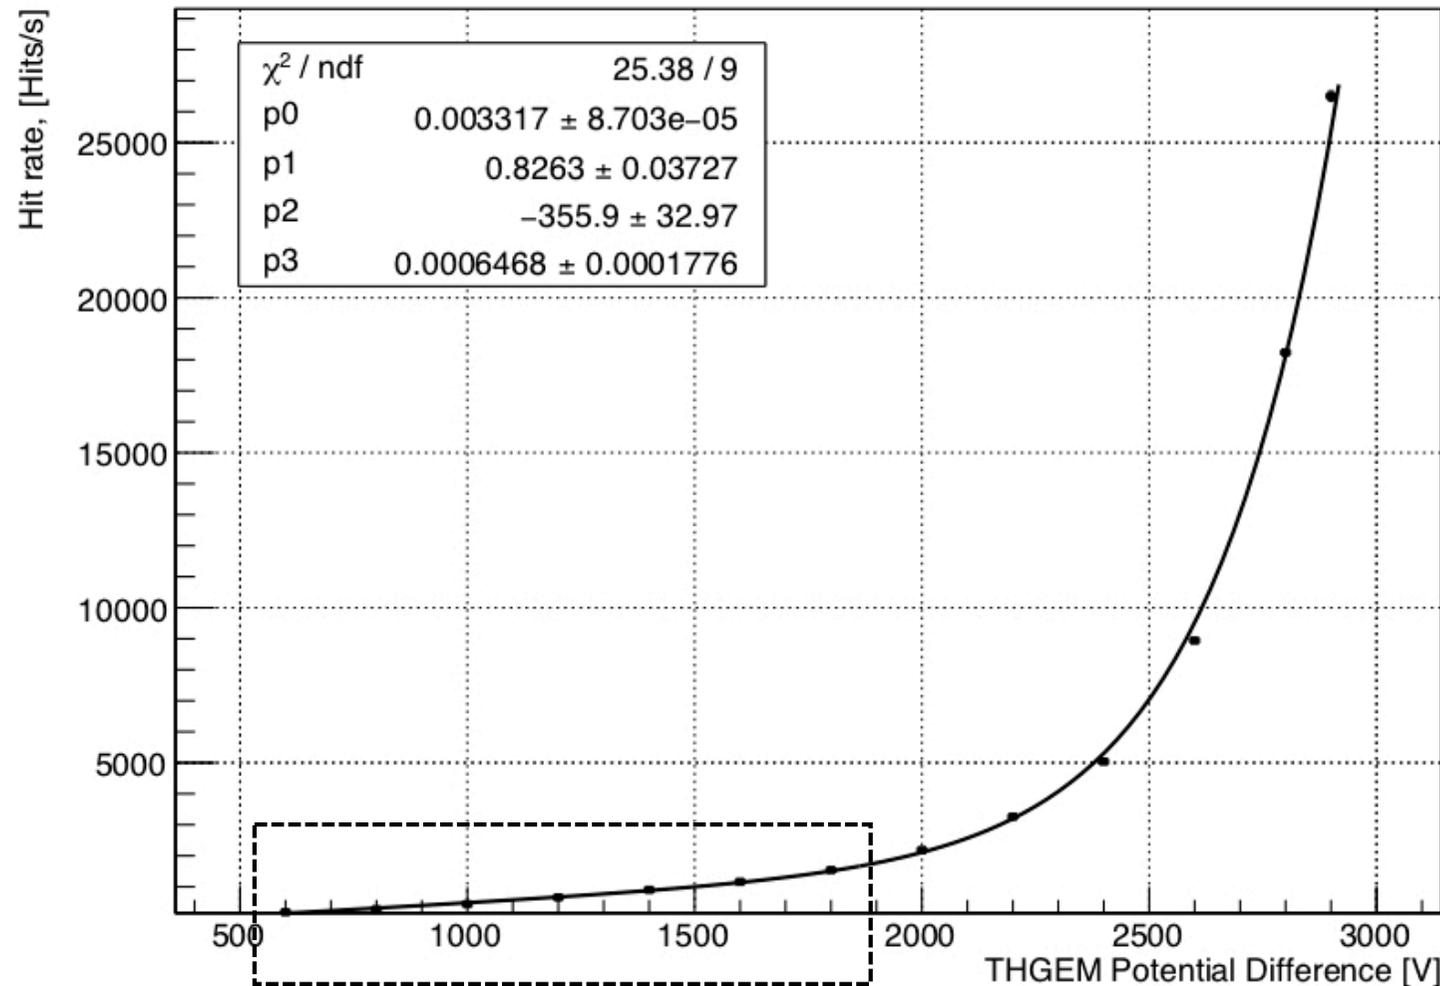


Sensitive to electroluminescence light -ie no charge multiplication in THGEM, solving issues with good performance that was necessary before in order to amplify enough the signal


TPX3Cam LAr Results

- 1.75 sec streaming (ie equivalent to 3km drift)





[Nominal drift velocity is 0.16 cm/ μ sec for 0.5kV/cm]

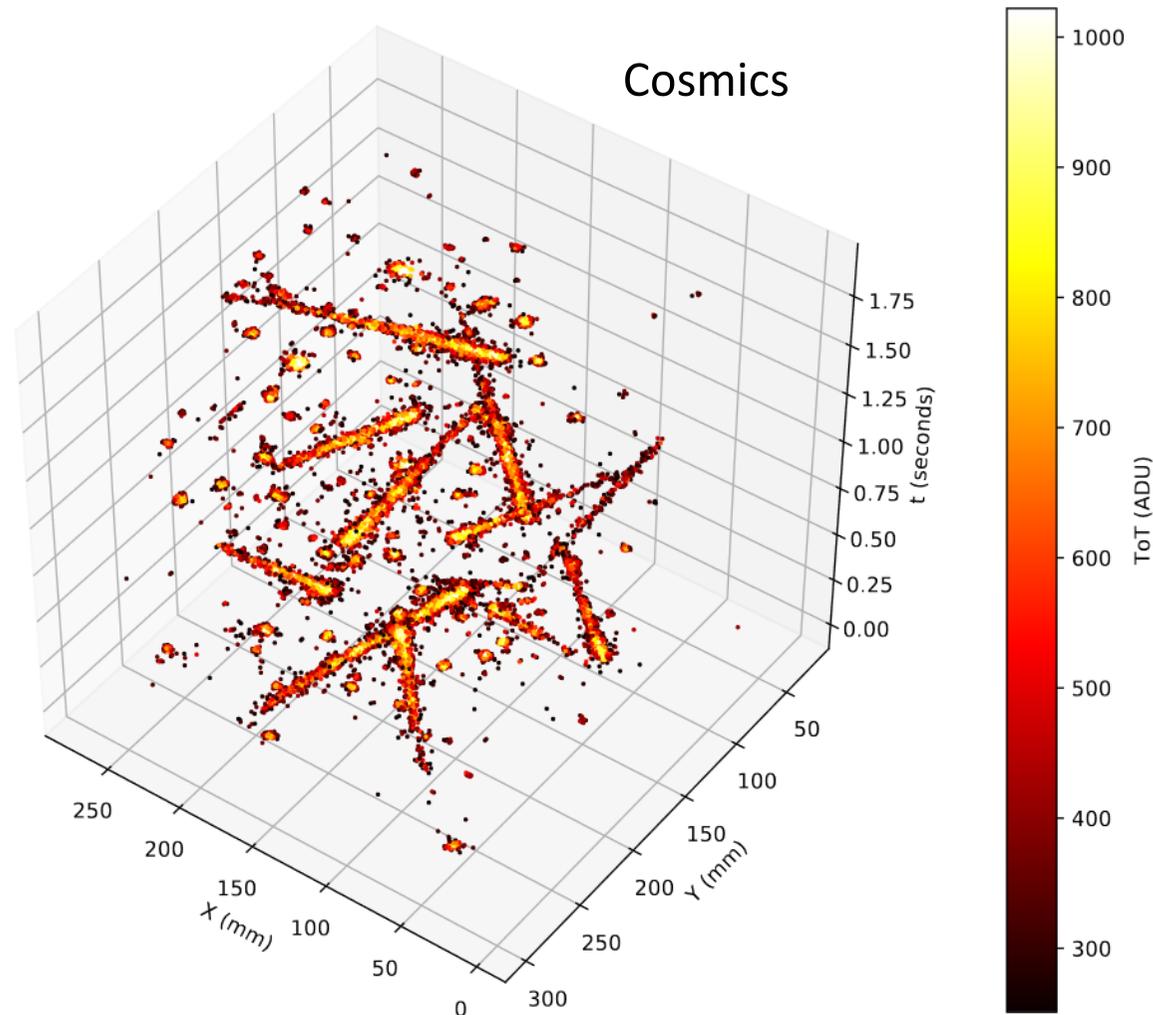

TPX3Cam 3D Cosmics LAr

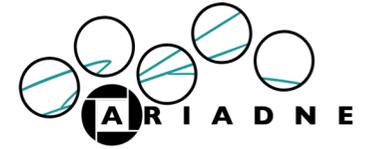



Gallery: 100 μ sec drift window, about 20cm tracks

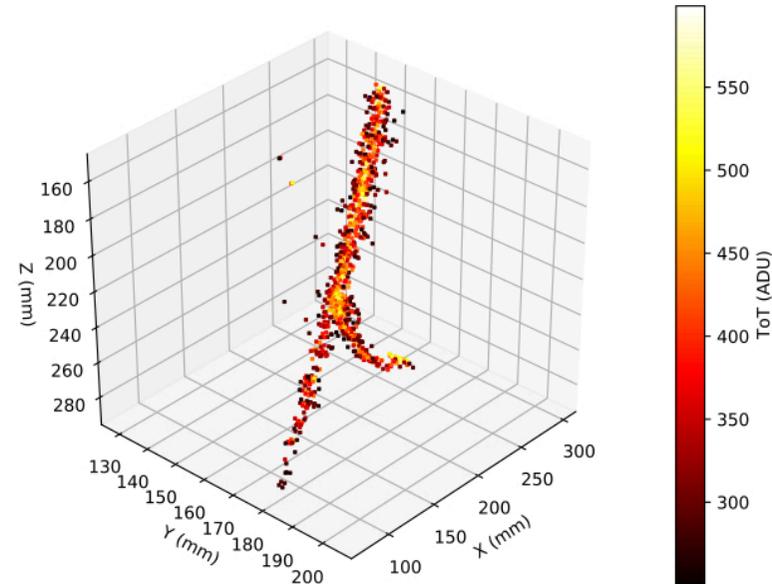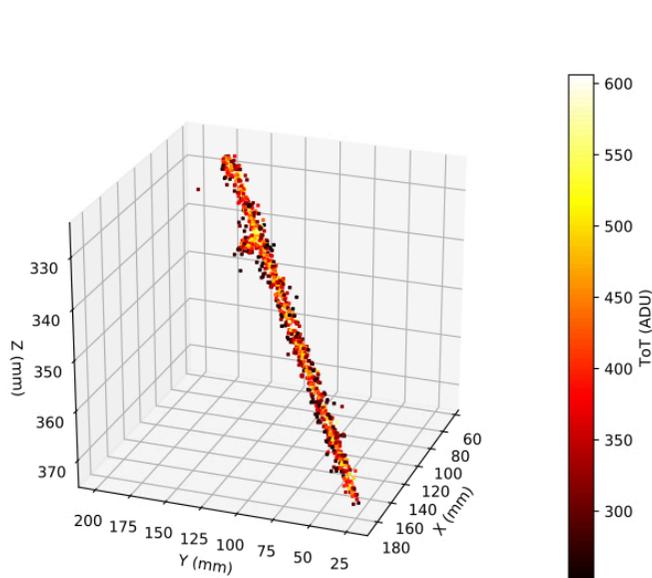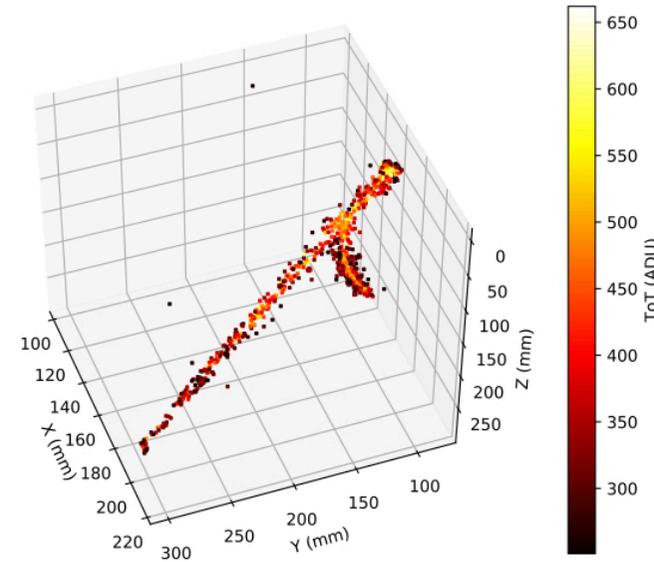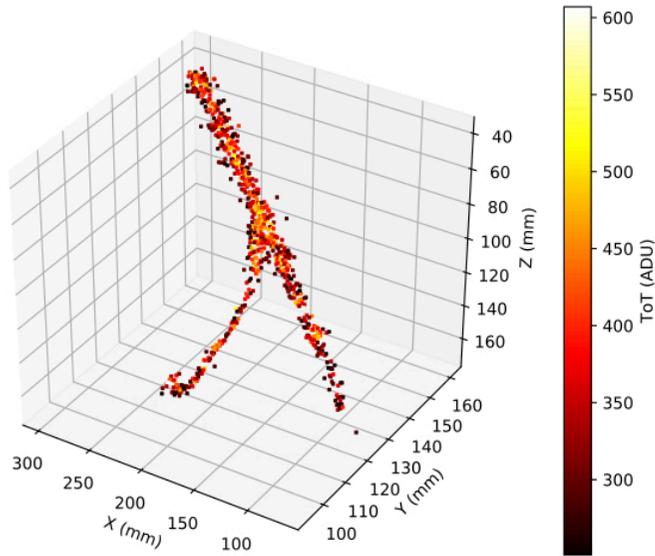



TPX3Cam 3D Cosmics LAr

~100μsec drift window, about 20cm tracks

Antiproton Candidates

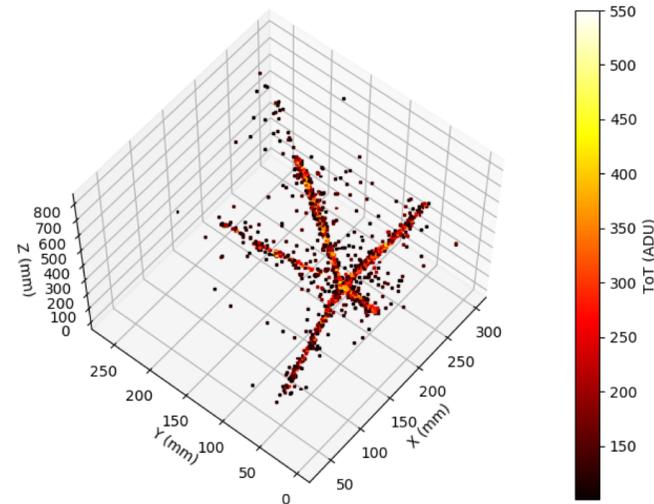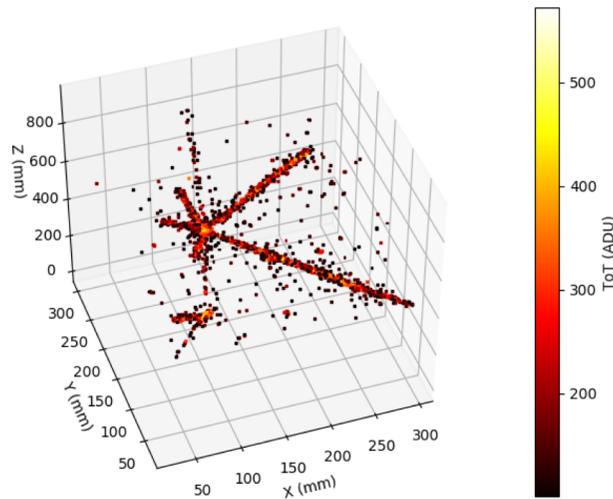

Stopping muon Candidates

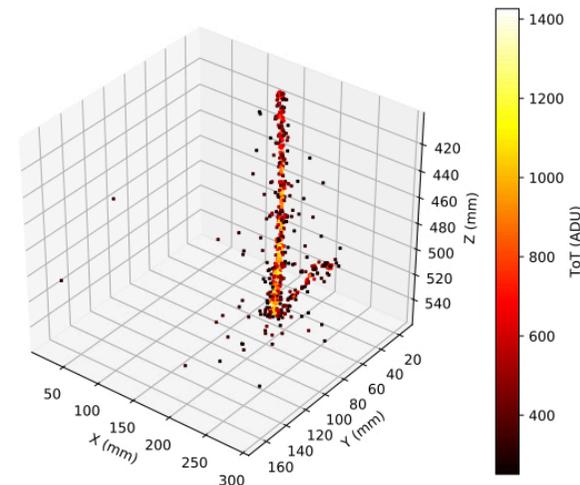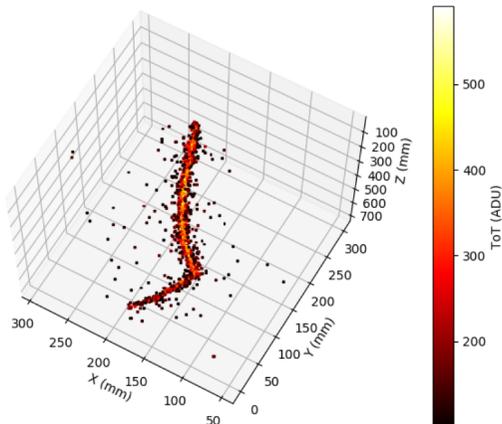


TPX3Cam 3D Cosmics LAr

Video: Continuous streaming, 10 msec slice (1ms jump per frame)



Top View



Side View

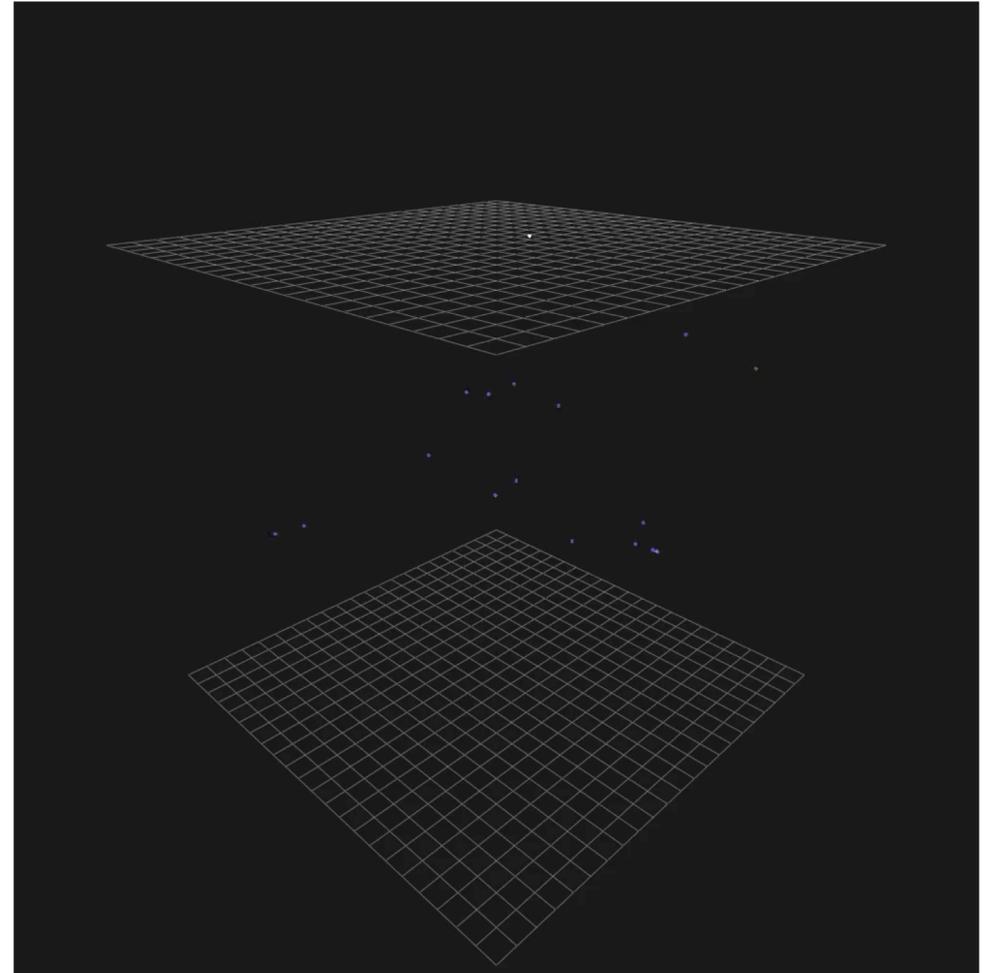

Stopping Muon & dE/dx

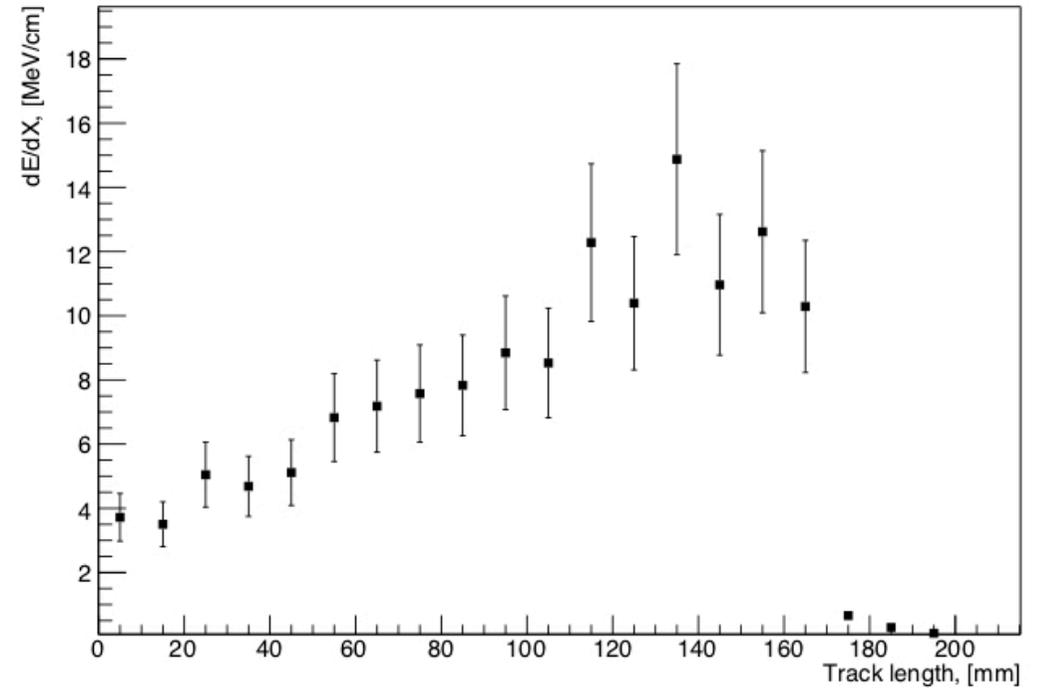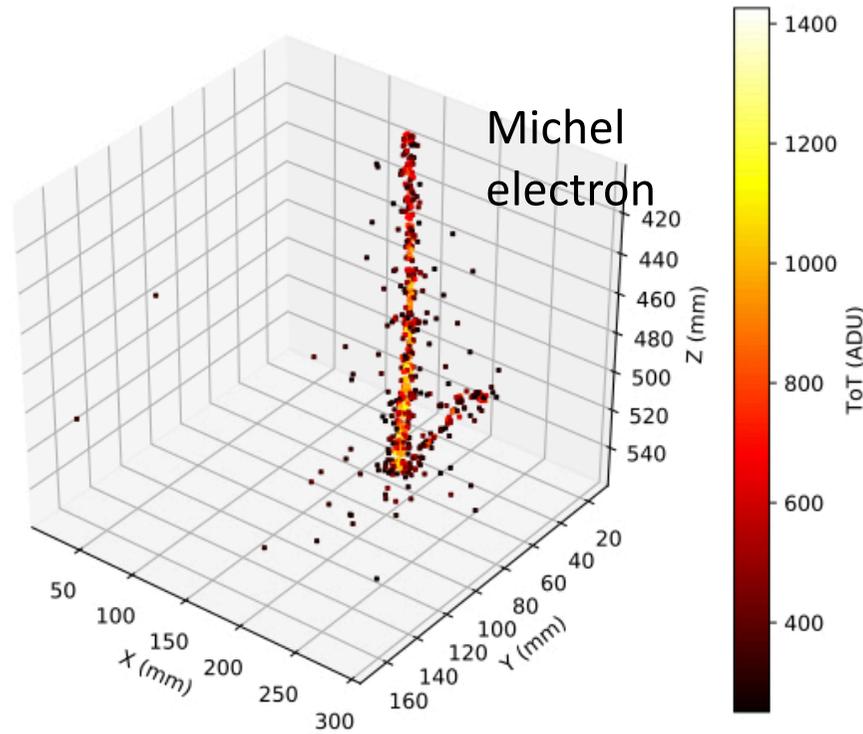

Stopping muon candidate

Energy profile of the left stopping muon event.

- Ongoing analysis with more statistics

TPX3Cam TPC Benefits




Raw data is natively 3D. Just need to convert ToA to z position using known drift velocity in the TPC (drift velocity in LAr is 0.0016 mm/ns). x,y pixel number to mm using the known field of view of the lens.



Huge readout rates are possible (80MHits/s)



Zero suppressed readout comes for free (~few KBytes per event)




Physics sensor (Timepix) being used for a Physics application, sensor is photon sensitive giving low energy threshold



Very low cost




Same readout is possible for two phase or gas TPCs

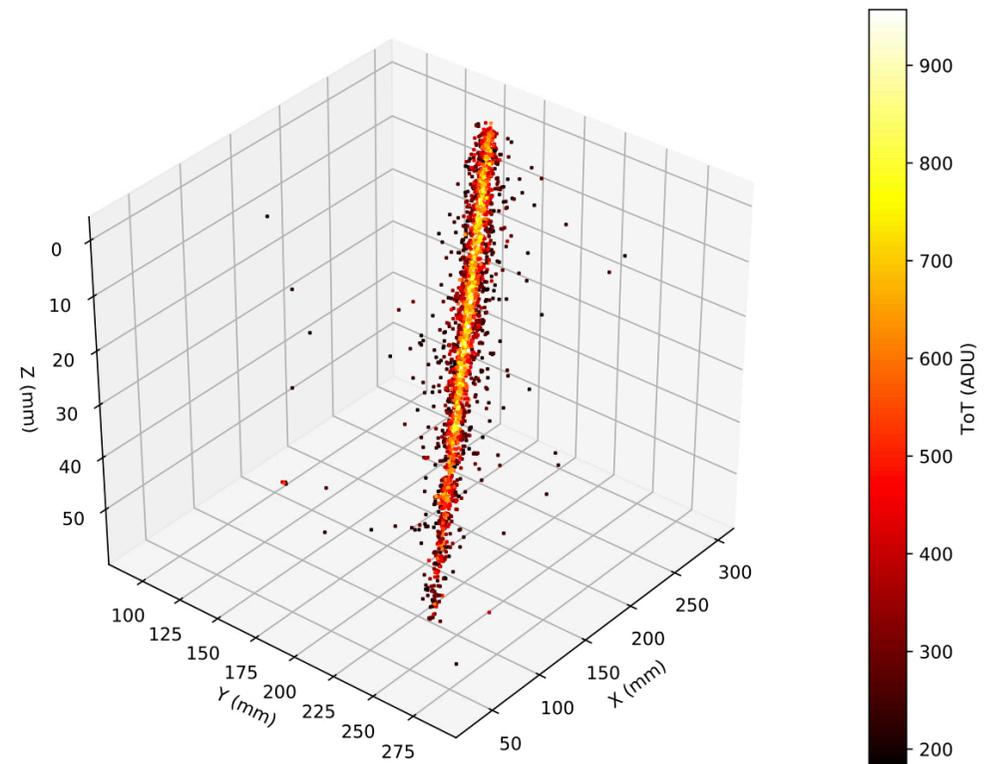

Determining max field of view/sensitivity for one TPX3cam

At 4.5mm/pix resolution the camera was capable to image 1.2m² equivalent area on ARIADNE

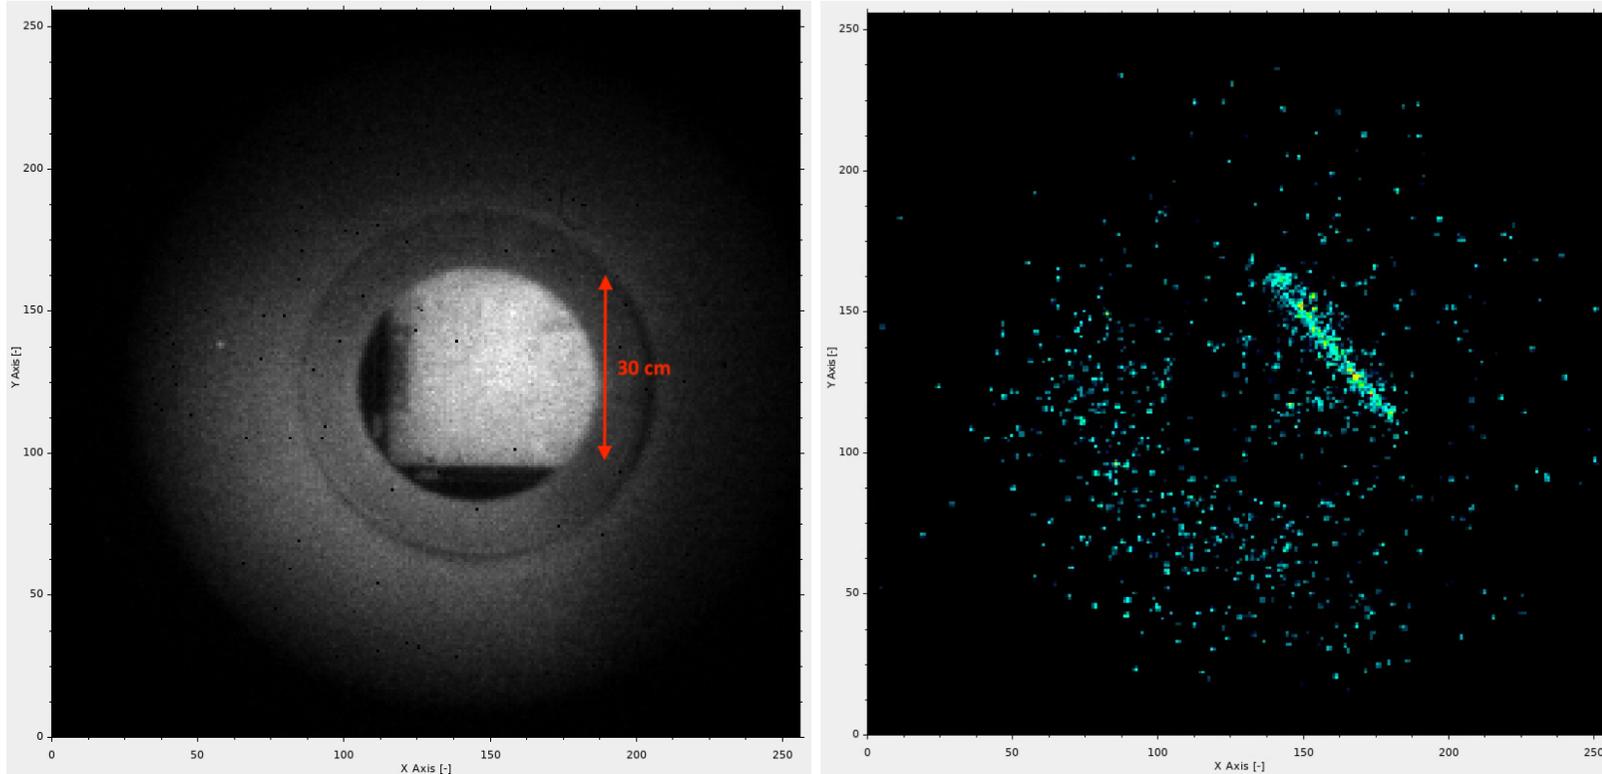

Left: Field of view seen when using the 11.5mm focal length lens (F/1.4). The 30cm x 30cm area that is visible of the THGEM only takes up roughly 1/4 of the total sensor area. The total field of view is approximately 1.2mx1.2m. The resolution is 4.5mm per pixel in x and y.

Right: A single cosmic muon seen in Time over threshold mode. The muon passes across most of the 30 cm length of the THGEM that is visible.

TPX3Cam - Cost for DUNE

Technology/performance is superb, Cost is of course important.

Table: As an example, demonstration figures for use of TimePix within Dune - 720m², 60m x 12m






Camera type	Sen. Size (pixels)	Cameras to cover 1m ²	Resolution (mm/pix)	Total cameras (to cover 720m ²)	Total cost (assuming €5k /camera*)
TPX3	256x256	9	1.3 (~ARIADNE)	6480	32.4M
TPX3	256x256	4	2	2880	14.4M
TPX3	256x256	1	4	720	3.6M
TPX4	512x512	4	1	2880	14.4M
TPX4	512x512	1	2	720	3.6M
TPX4	512x512	<1	3	530	2.65M

* Cost is a place holder based on discussions with ASI, assumes large production and optimized optics

ARIADNE technology is now an option for the 4th Module of DUNE.



Wide variety of technology ideas


Pixel readout of SP TPCs

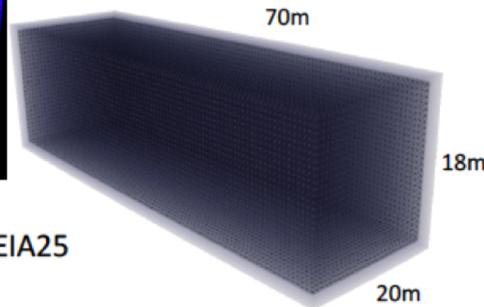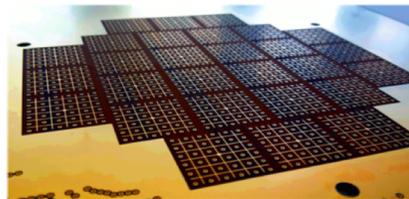

THEIA25

Optical readout of DP TPCs
(ARIADNE)

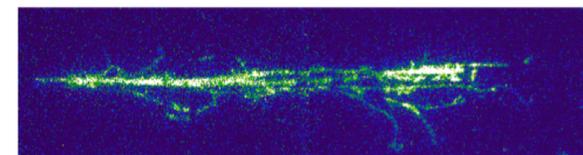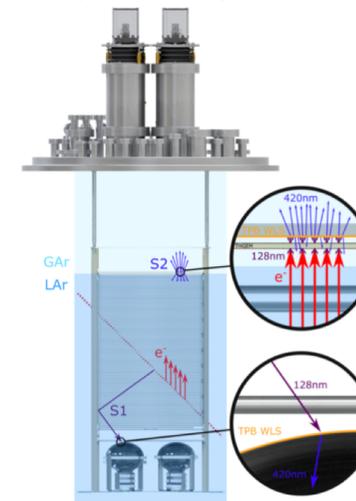

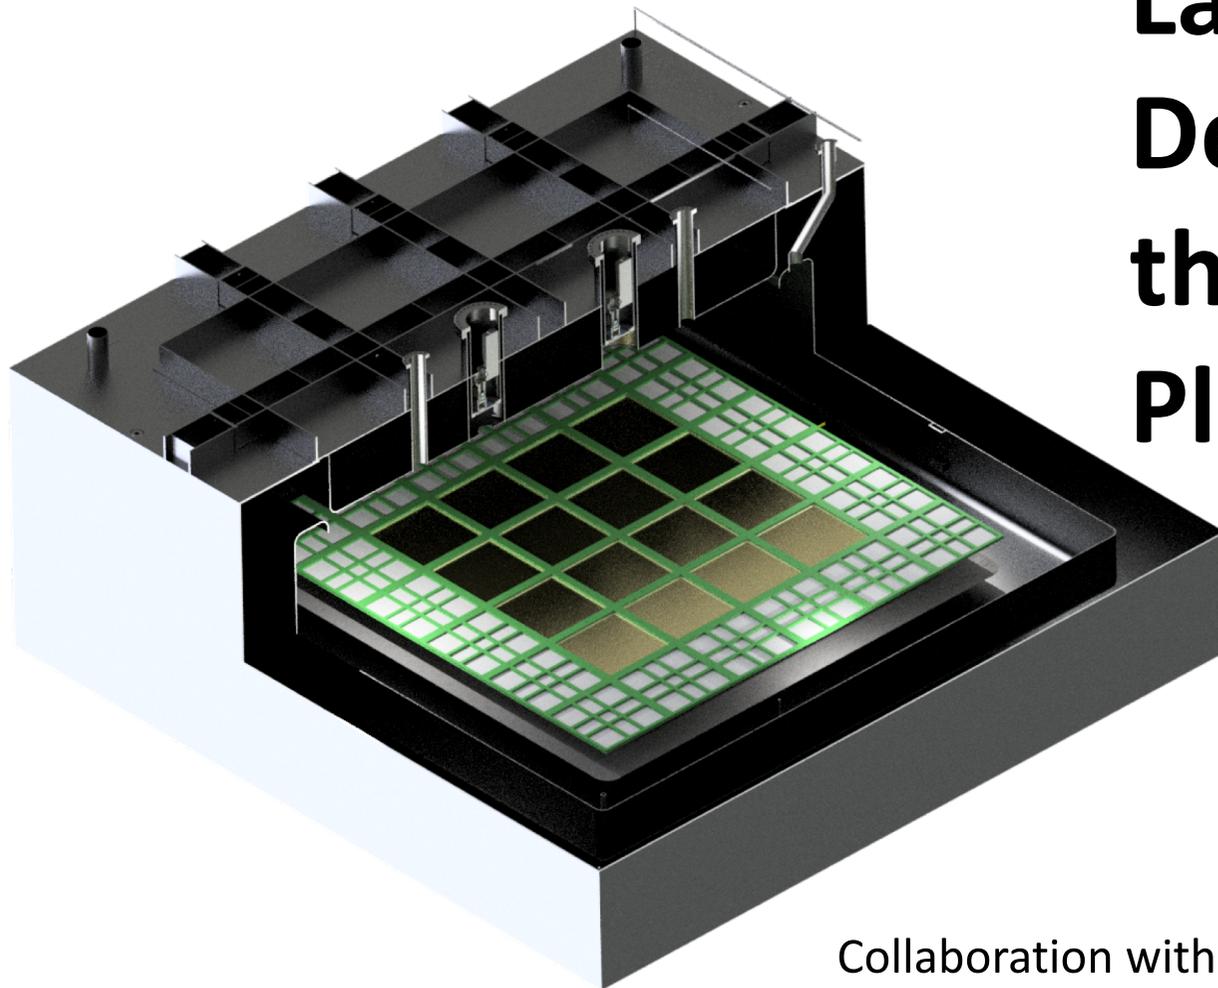

Larger scale Demonstration at the CERN Neutrino Platform

Collaboration with Neutrino Platform team:
Marzio Nessi, Francesco Pietropaolo and Filippo Resnati

Larger scale demonstration at CERN: The Current Vessel





The cryo-vessel used to test the protoDUNE THGEMs will be modified and a full optical TPC will be instrumented

Larger scale demonstration at CERN: The Current Vessel



Inside the cryostat



Larger scale demonstration at CERN: The Current Vessel

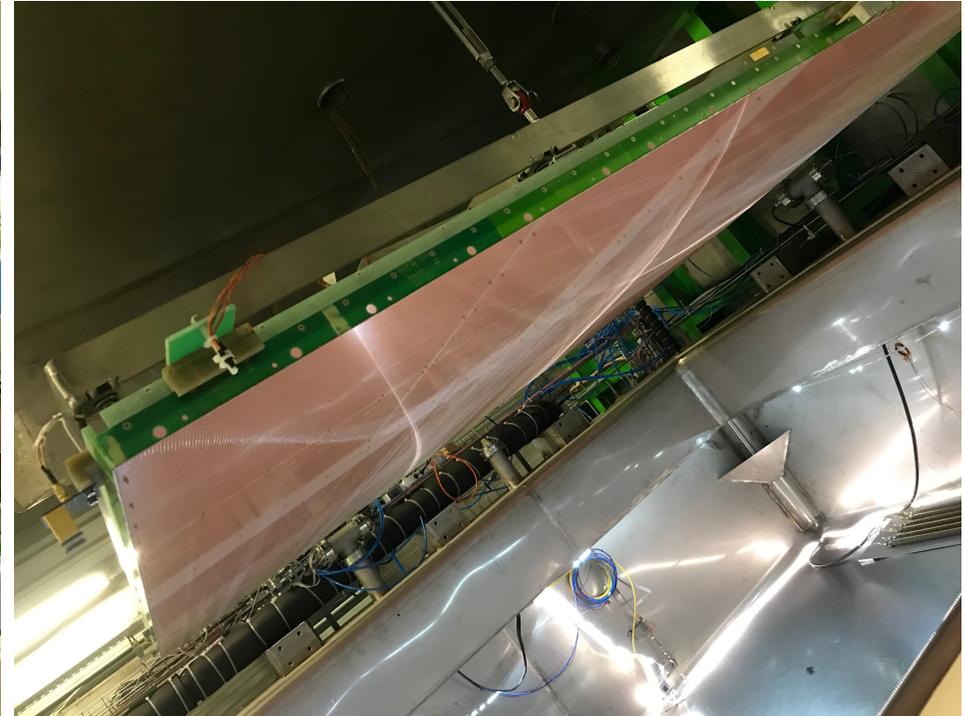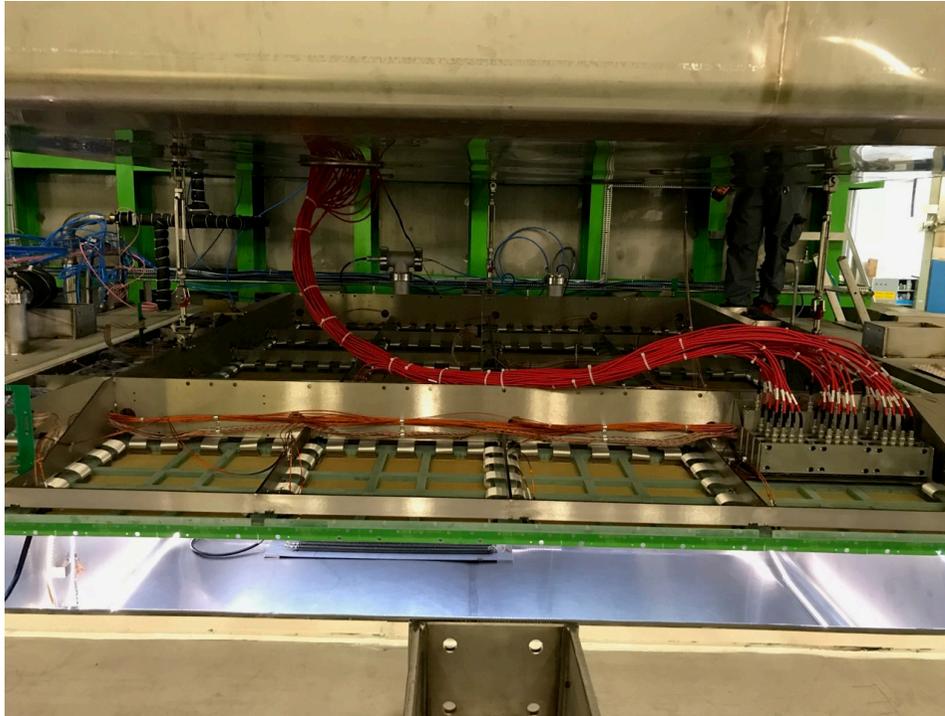

The Charge Readout Planes (CRP)


An array of THGEMS + anodes

Larger scale demonstration at CERN: Conceptual Design

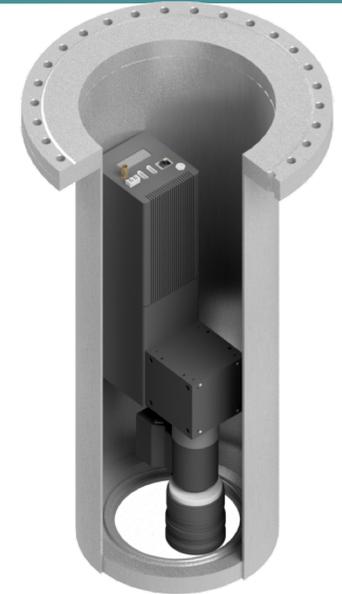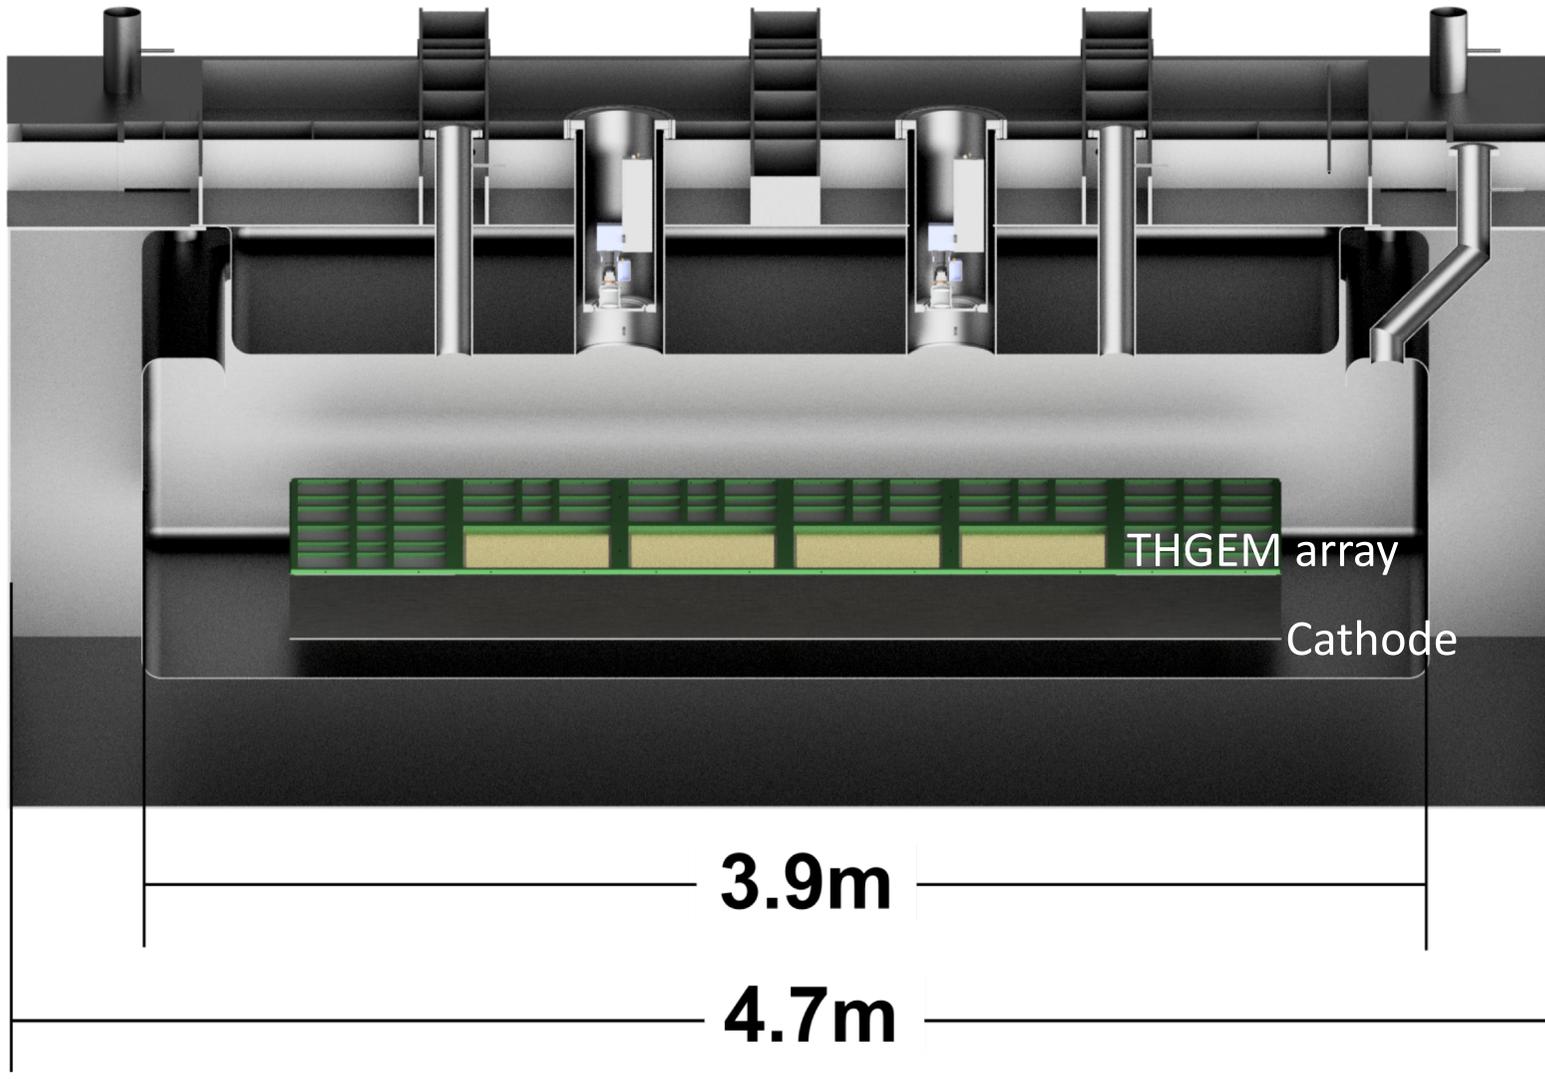

- 4 TPX3 cams
- 2m² active area
- 20 cm drift

Larger scale demonstration at CERN –Field of View

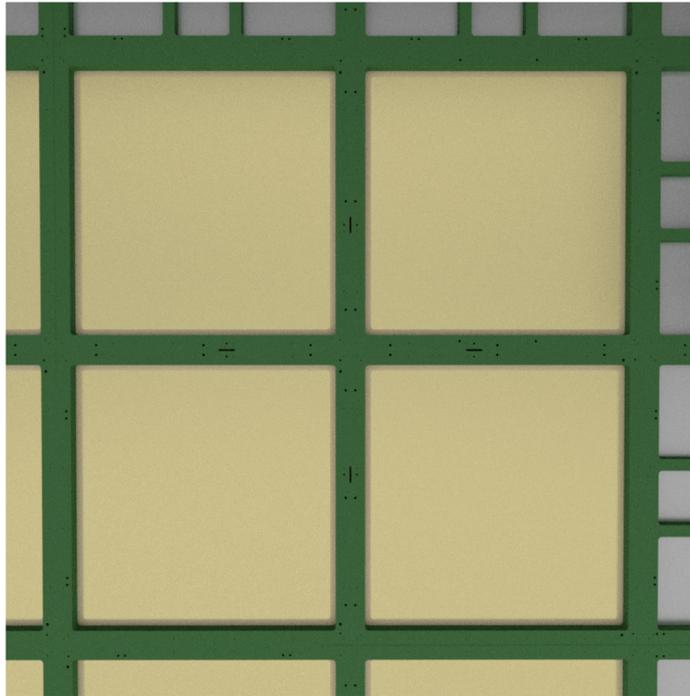

**Cameras will be within a plug viewport
in order to get the desired field of view**

**One camera will be looking an area of about
1.1mx1.1m. This will correspond to an array of 4
THGEMS. Camera resolution will be about 4 mm/pix**

- Technology is mature and ready to go now. From here on is all about improvements and dedicated optimization for the specific detector
 - Plans to test a VUV sensitive intensifier to remove the need of TPB
 - Further in the future bring the cost even lower by alternatives to intensifiers
 - TPX4 is coming soon
- Plan to start commissioning the large scale detector at CERN in summer 2020.

The A.-Team



Thank you!

<http://hep.ph.liv.ac.uk/ariadne>

Extra Slides

TPX3 Specifications



Timepix3	
Pixel matrix	256 x 256
Pixel size	55 x 55 μm^2
Technology	CMOS 130 nm
Measurement modes	<ul style="list-style-type: none">• Simultaneous 10 bit TOT and 14 + 4 bit TOA• 14 + 4 bit TOA only• 10 bit PC and 14 bit integral TOT
Readout type	<ul style="list-style-type: none">• Data driven• Frame based (both modes with zero suppression)
Dead time (pixel, data driven)	>475 ns (pulse processing + packet transfer)
Output bandwidth	40 Mbits/s – 5.12 Gbits/s
Maximum count rate	0.4 Mhits/ mm^2/s (data driven mode)
TOA Precision *	1.56 ns
Front end noise	60e- RMS
Minimum threshold	~500 e-

← $\approx 1\text{mm}$ in LAr

TPX3 Specifications



Timepix3 → Timepix4

		Timepix3	Timepix4
Technology		IBM 130nm	TSMC 65nm
Pixel Size		55 x 55 μm	$\leq 55 \times 55 \mu\text{m}$
Pixel arrangement		3-side buttable 256 x 256	4-side buttable 256 x 256 or bigger
Operating Modes	Data driven	PC (10-bit) and TOT (14-bit)	CRW: PC and iTOT (12...16-bit)
	Frame based	TOT and TOA	
Zero-Suppressed Readout	Data driven	< 80 MHits/s	< 500 MHits/s
	Frame based	YES	YES
TOT energy resolution		< 2KeV	< 1Kev
Time resolution		1.56ns	~200ps
Readout bandwidth		5.12Gb (8x SLVS@640 Gbps)	20.48 Gbps (4x 5.12 Gbps)
Front-end		“with” Volcano	No volcano → Dynamic gain But supply only 1.2V

Higher x,y resolution
(or cover more area
with one camera)


Faster readout
rates

Improved
calorimetry

Future optical TPX R&D and bringing the cost down...

- Need to move away from intensifier (~16k euro)
- Integrate TPX3/4 into a Photonis Planacon 1 inch tube

1 inch Planacon

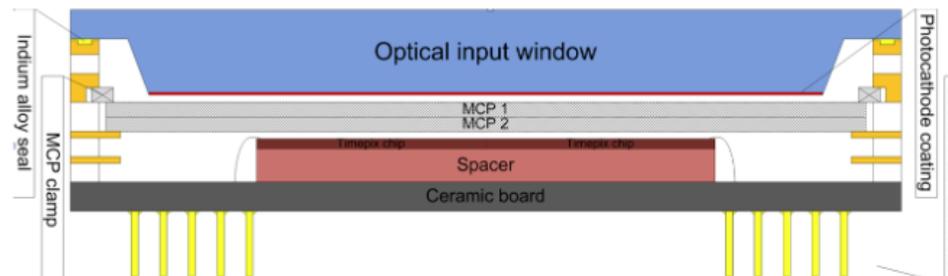

Something similar has already been made with TPX2 (quad) and It worked beautifully [2]

Not yet been done with TPX3 or TPX4 so we never had simultaneous ToA & ToT in such a device

Many physics applications, similar devices used for RICH (LHCb)

Quad Planacon:



Benefits of direct integration into Planacon:


- No longer need a Phosphor screen – phosphor screen degrades timing performance and adds cost/complexity
- Compact – Entire TPX + intensifier package fits in the palm of your hand (1 inch x 1 inch tube)
- Lower cost – eliminated phosphor and entire device can be manufactured in a proven / already existing factory.

[2] <http://iopscience.iop.org/article/10.1088/1748-0221/9/05/C05055/pdf>


TPX3Cam Next R&D Steps




UNIVERSITY OF
LIVERPOOL

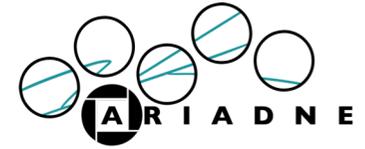


Eliminating TPB, conceptual direct VUV imaging setup

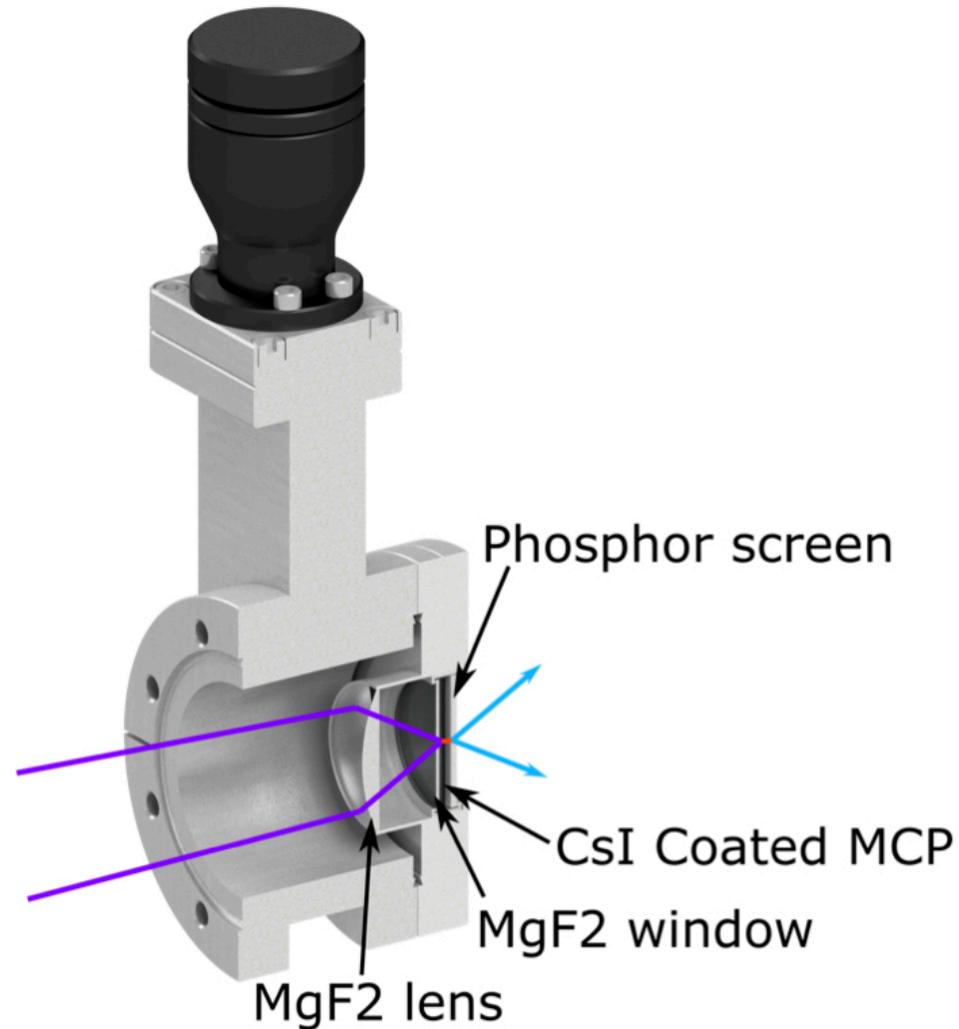

Energy Calibration

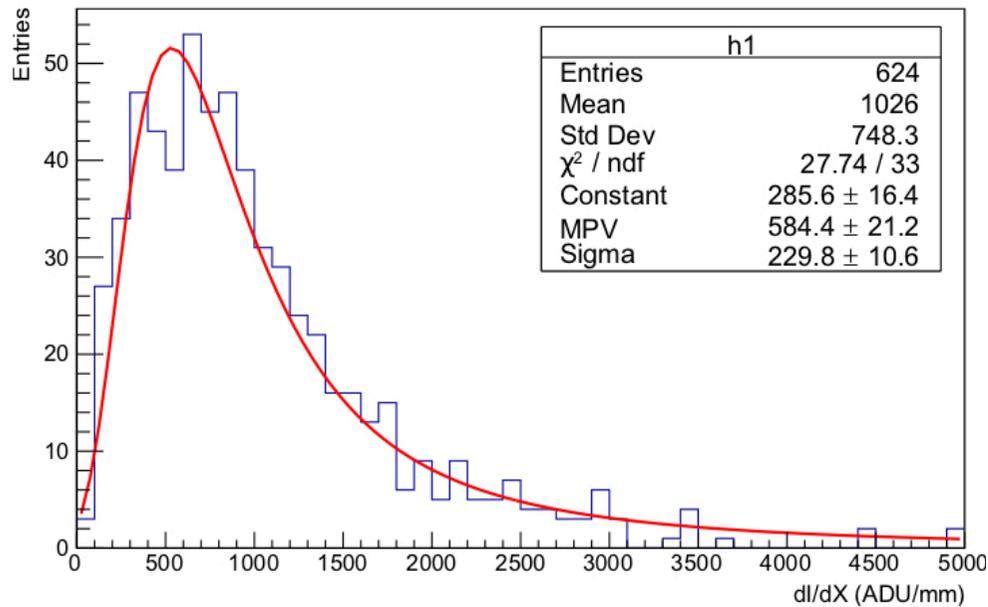

Sample distribution of summed hit intensities for 1 mm slices of a cosmic muon track.

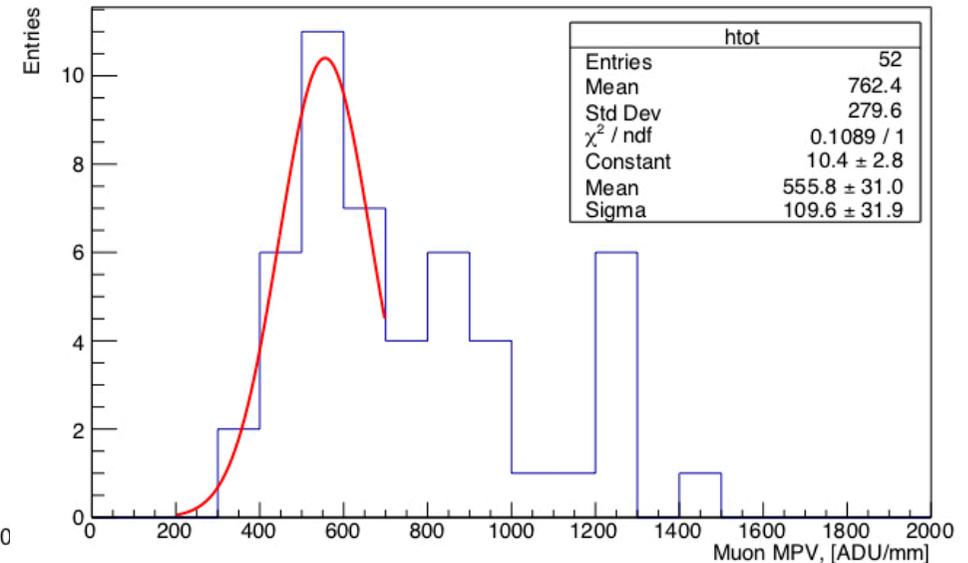



Distribution of MPV values for well fitted cosmic muon samples. Gaussian peak corresponds to the expected muon MPV energy loss of 1.6 MeV/cm.

Track position resolution




x - y pixel hits from the track centre
(>300 ADU)

Hit timings in the z axis, relative
to the centre of the fitted track.

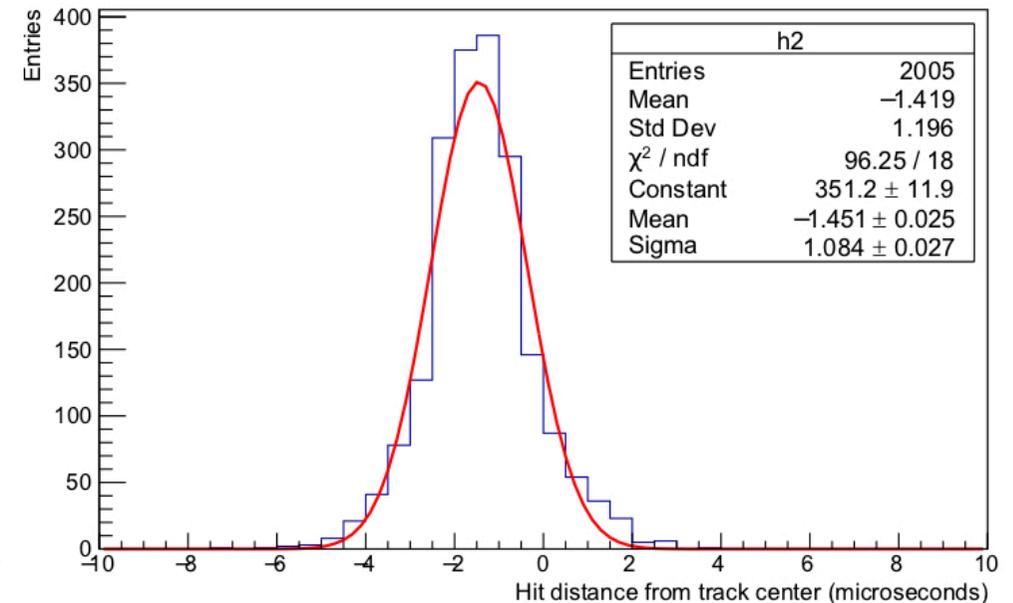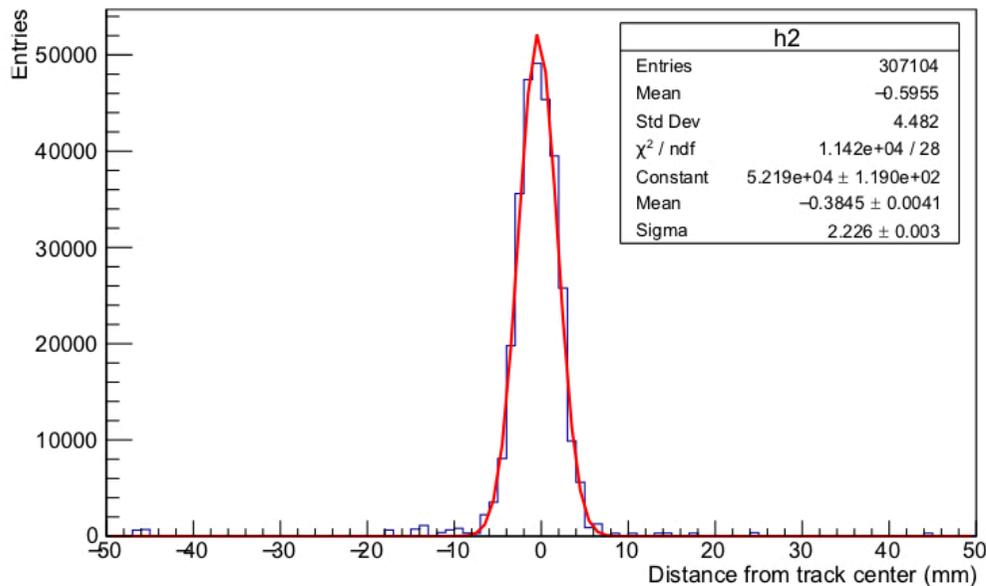

Extra – Multiphoton absorption of LAr

- Excitation states form bands in LAr
- Double photon excitation to intermediate excited state
- Single photon excitation to ionised state
- 4.67eV photon \approx 266nm - Nd:YAG lasers very suitable

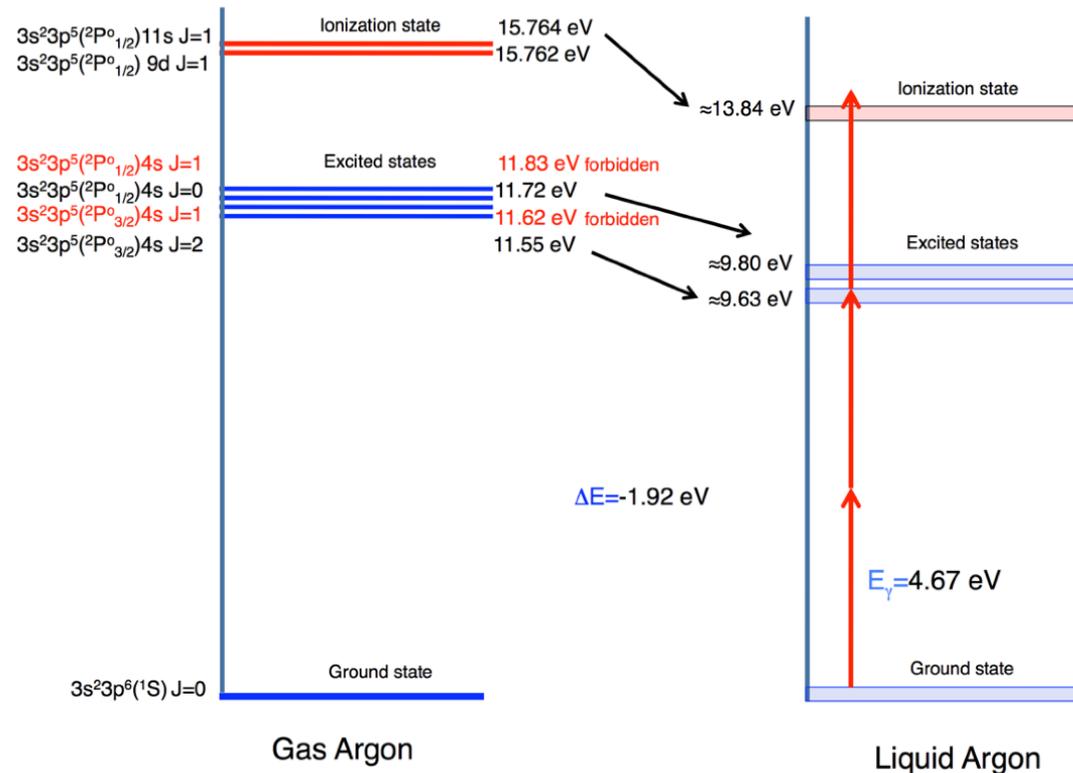


1. Rossi, B. Monitoring the parameters of a large size liquid Argon Time Projection Chamber using UV laser beams. J. Phys.: Conf. Ser. 308, 012025 (2011).

Larger scale demonstration at CERN



UNIVERSITY OF
LIVERPOOL

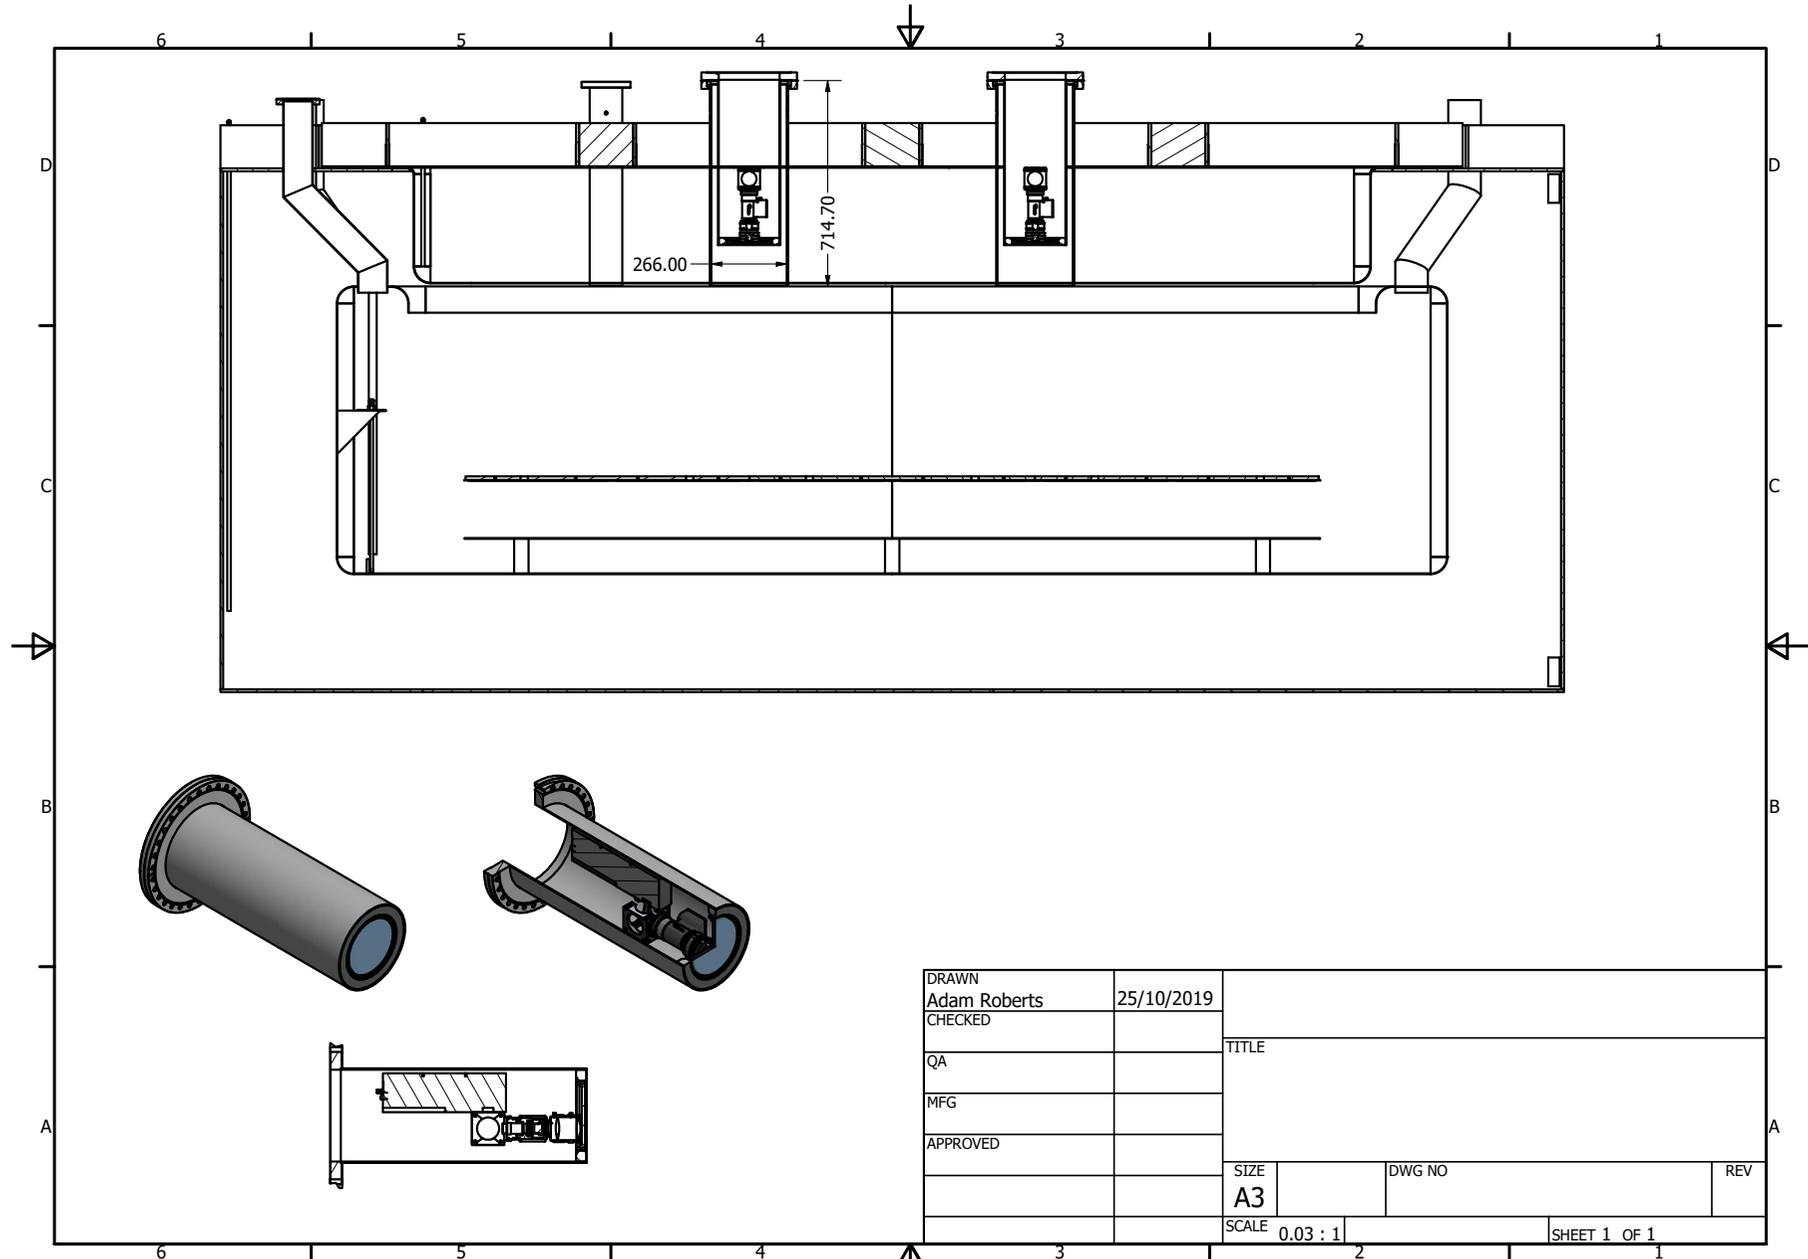

Extra – Geant4 Energy Containment

